

# TROPICAL WINDOW



AFGB14BBAA-B



AXGB18BBAA-B

AXGB22BBAA-B

## TECHNICAL SPECIFICATIONS

PARAMETERS	Model Number	AFGB14BBAA-B	AXGB18BBAA-B	AXGB22BBAA-B
BEE Star Rating	-	3	3	3
Tonnage	TR	1.2	1.5	1.8
Power Supply	Ph-Hz-V	1φ-50-230	1φ-50-230	1φ-50-230
Running Current	A	5.6	7.5	8.5
Standard Cooling at 100% Capacity	W	4,110	5,300	6,300
Power Consumption at 100% Capacity	W	1,270	1,700	1,950
Rated ISEER	kWh/kWh	3.24	3.12	3.23
Electricity Consumption per Annum	kWh	983	1316	1510
Moisture Removal	l/h	1.3	1.9	2.8
Indoor Fan Speed Control Levels	-	3	3	3
Indoor Airflow Volume-High	m3/h	800	950	950
Unit Dimensions HxWxD	mm	429x661x706	429x661x778	429x661x778
Unit Net Weight	kg	48.4	56.0	62.3
Indoor Noise Level-Low	dB(A)	51	56	56
Ambient Operating Temperature Range	°C	18°C ~ 52°C	18°C ~ 52°C	18°C ~ 52°C
Operating Voltage Range	V	195V ~ 265V	195V ~ 265V	195V ~ 265V
Refrigerant Type	Non-CFC	R32	R32	R32
Compressor Type	-	Hyper Tropical Rotary	Hyper Tropical Rotary	Hyper Tropical Rotary
Evaporator & Condenser Coil Material	-	Copper	Copper	Copper

\*Specifications, design and features are subject to change without prior notice for further development. The above models conform to energy labelling as per BEE regulation. Specifications are based on the following conditions; Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB. Pipe length : 5.0 m Voltage : 230 [V]. The noise level is the value when measured in an anechoic room.

## BBA Series


Star Rating:




Model Number: AFGB14BBAA-B

AXGB18BBAA-B

AXGB22BBAA-B

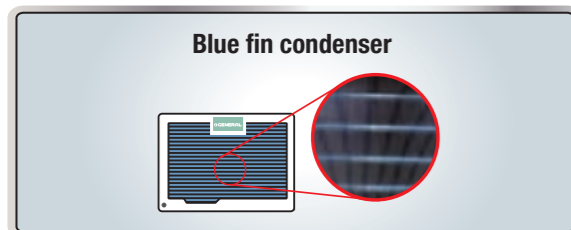

## REMOTE CONTROLLER FEATURES

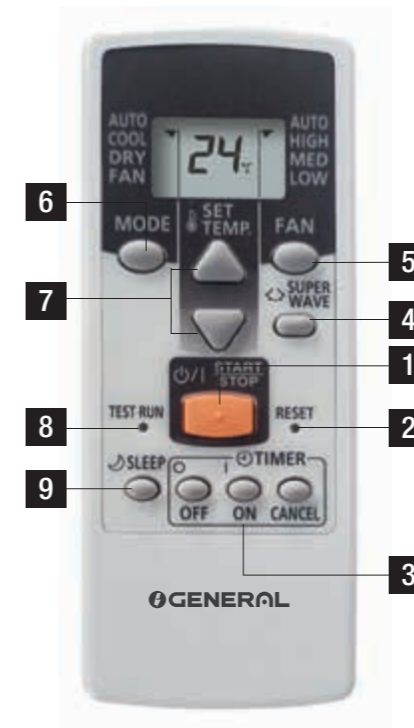

- 1 START/STOP BUTTON
- 2 RESET BUTTON
- 3 TIMER BUTTON
- 4 SUPER WAVE BUTTON
- 5 FAN BUTTON
- 6 MODE BUTTON
- 7 SET TEMPERATURE (▲/▼) BUTTON
- 8 TEST RUN BUTTON
- 9 SLEEP BUTTON

\*Design and features are subject to change without prior notice for further development. The above models conform to energy labelling as per BEE regulation. Please refer page 88 for specific modelwise features.

