

FUJITSU GENERAL Way

Our Mission

Living together for our future

Through innovation and technology, we deliver a brighter future with the peace of mind to our customers and societies around the world.

Our Philosophy

Act Spontaneously

We embrace new challenges by investing in ourselves for personal growth, and through continuous creativity with a spontaneous attitude.

Develop Our Team

We respect and value our people, and optimize their abilities through fostering culture and diversity, and utilizing a collaborative effort focused on communication.

Value Integrity

To achieve our goals, we always act with integrity and shared ethics.

CONTENTS

004 OUR MESSAGE

Innovation and Technology

006 Comfort

008 Control

010 History

012 World Wide Locations

014 Global Business Activities

016 Project References

018 Global Development & Production Bases

020 High Quality Development & Production Facilities

022 OVERVIEW

022 For Light Commercial

024 For Commercial

PRODUCT LINEUP

VRF

VENTILATION

CONTROL SYSTEM & OPTIONAL PARTS

OUR MESSAGE



for Comfort



for Control



Innovation & Globalization



for Future



for Design

We create the comfort for the people all over the world by made-in-Japan quality and innovative manufacturing.



History



World Wide Locations



Global Business Activities



Project Reference



Global Development & Production Bases



High Quality Development & Production Facilities




Comfortable Airflow Design

Fujitsu General has developed and commercialized numerous world-first technologies with a commitment to real comfort. This concept also applies to our designs. We will continue to pursue the possibilities of air conditioners and provide new comfort in the future.

3D Flow Cassette

3 Air Outlet Ports can be controlled individually

Using the "Comfortable airflow setting" function allows the left and right air outlet ports and the wide center air outlet ports to automatically create a comfortable space for improved comfort.

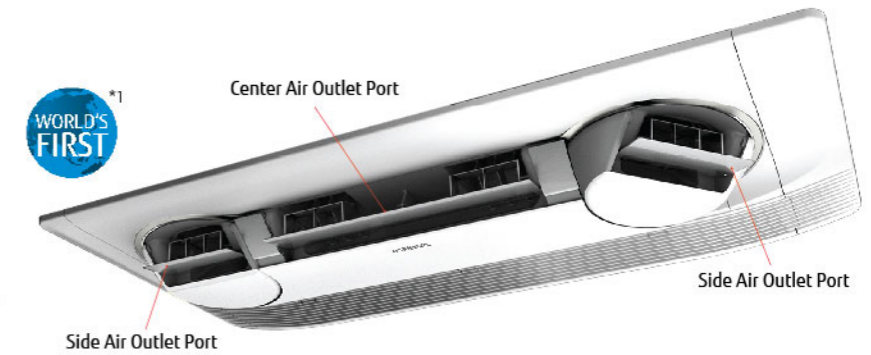

Cassette Circular Flow

Unique Circular Flow design

Cassette type realizes Circular Flow to blow large airflow in 360° direction by mounting high performance DC fan motor, turbo fan and unique seamless airflow louver design.

NEW

One - way flow cassette

Their compact sizes make it easy to install them in a variety of commercial locations and environments. The large flap with triangularly arrayed louvers has a wider movable range and directs an airflow to the furthest corners of the room.



NEW

Compact Floor

Individual vertical airflow by 2-fan can control the whole room comfortably. Due to compact and whole surface suction method model, floor, concealed, half concealed, or wall mounted installation can be available to match the room layout.



Control


NEW

User friendly screen display facilitates easy operation.

By using our Wireless LAN Interface and "FGLair" app, you can control your home's cooling and heating anytime and anywhere.


Operation from Anywhere

Using the Internet of Things (IoT), Fujitsu General actively provides services that allow users to control air conditioners from their smartphones. We will expand open co-creation efforts with external partners and deepen our use of IoT and artificial intelligence (AI) to develop new functions and services in efforts to develop secure, convenient air conditioners.

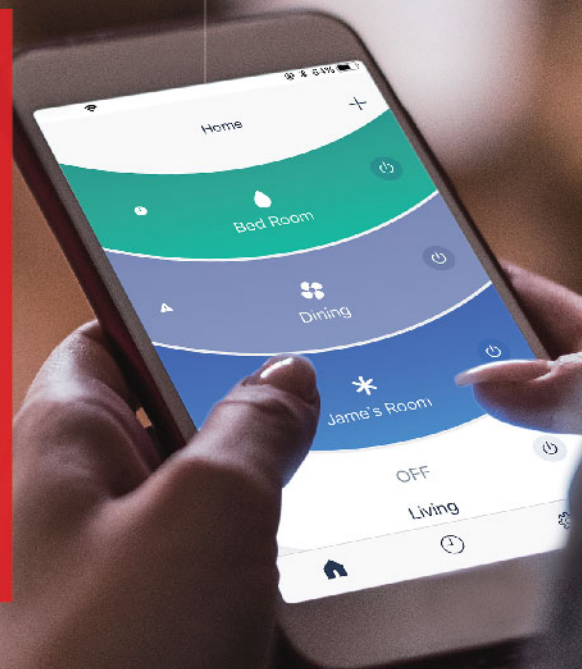

If you forget to turn off your system before you left your home - no problem!

"FGLair" is an application software that enables you to operate the Fujitsu General's air conditioner(s) with a mobile device from anywhere out of your home or when you are on travelling.

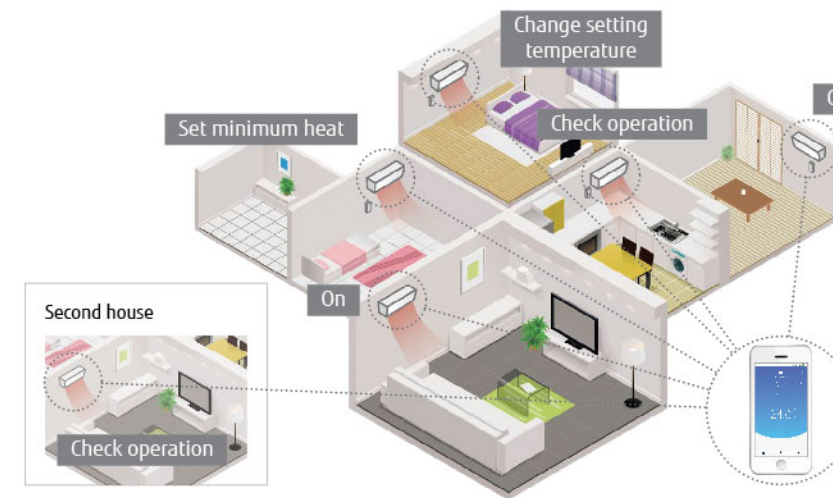

Wireless LAN Interface

The exclusive Wireless LAN adaptor enables to operate the air conditioner by smartphone or tablet PC from outside.



+



Download Free



New Compact Wired Remote Controller

Large screen and simple display

- Although the size is compact, the screen is large
- Large letters makes it easy to see
- Operation is simple and easy-to-understand



Central Remote Controller for VRF

Central Remote Controller allows many menus to display on the top screen by adopting touch panel screen. Necessary window pops up only by touching the menu you want to operate. More intuitive operation can be performed.

Remote monitoring/ Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere.





History

1936 Established as Yaou Shouten Ltd.

Overseas Air Conditioning Business since 1971

1960: Air conditioning business starts. Japan-domestic business starts.

1971 Air conditioner exports to Middle East.

1977 "Super Power, Super Quiet" Series

1982 Window type 3 Super Series

AL/AX Series



1985 Large wall mounted and multi air conditioner introduced.

WORLD'S FIRST *1,*2 **1991** Air conditioner with the world's first lambda heat exchanger


1994 Air conditioner with the world's first power diffuser

2001 AIRSTAGE™ Series is released. VRF air conditioners for large-sized buildings.

AIRSTAGE



WORLD'S FIRST *3 **2002** Air conditioner with the world's first automatic self-cleaning filter system

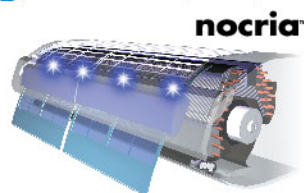

2004 Standalone type small VRF AIRSTAGE™ J Series is released.



2006 VRF Heat Pump type Max. 42 HP AIRSTAGE™ V Series is released.

AIRSTAGE V



2009 Heat Pump Modular type Max. 48 HP AIRSTAGE™ V-II Series is released.



2009 Air to Water system is released.

WATERSTAGE

1950 ~

1970 ~

2000 ~

2010 ~

2020 New Topic

Manufacturing Company Establishment

1955 Headquarters in Kawasaki

1964 Electronic components factory in Ichinoseki



1977 Air conditioner manufacturing company in Hamamatsu (now Hamamatsu business office.)

1991 Air conditioner manufacturing company in Thailand.

1994 Air conditioner manufacturing company in Shanghai, China.

1998 Air conditioner motor manufacturing company in Thailand.

2006 VRF air conditioner manufacturer, sale, and service company in China.

2007 Air conditioner technology building completed on Main Office group. Air conditioner R&D Center in Kawasaki.

2009 Operation of compressor factory begins in Thailand.

2012 Joint venture in Thailand to manufacture compressors

2016 Commercial use air conditioner R&D Center in Thailand



2019 Construction of new building to strengthen development capabilities at Kawasaki head office:

Base to create new value by combining internal and external knowledge



2020 Construction of Manufacturing That Utilizes the IoT:

We will introduce a real-time IoT System to immediately visualize and analyze a variety of information.



New Fujitsu General (Thailand) Co., Ltd. (Thailand) FACTORY-2



Fujitsu General (U.K.) Co., Ltd. (U.K.)



Fujitsu General (EURO) GmbH

Sales & Service Maintenance Company Establishment

1976 North America sales company

1977 Europe sales company (UK)

1978 Australia sales company / Europe sales company (Germany)

1980 Brazil sales company

1997 Asia sales company (Singapore)

1998 Middle East sales company (UAE) / New Zealand sales company

2000 Air conditioner manufacturing and sale technical partnership in India

2002 Taiwan sales company

2006 China sales company

2016 THE AIRSTAGE on Broadway in New York



THE AIRSTAGE ON BROADWAY
Fujitsu General Solution Center

For Light Commercial

2011 High energy saving type AIRSTAGE™ J-II Series is released.

2014 Small & lightweight outdoor unit AIRSTAGE™ J-IIS that has improved easy installation with a single fan



2016 Small VRF AIRSTAGE™ J-III that has advanced energy saving and easy installation is released.

2017-19 Small VRF AIRSTAGE™ J-IIIIL suitable for diverse light commercial properties is released.



2019 New cassette style released. 3D Flow Cassette

For Commercial

2012 Heat Recovery Modular type AIRSTAGE™ VR-II Max. 48 HP is released.

2014-15 Heat Pump Modular type AIRSTAGE™ V-III Max. 54 HP ideal for large properties is released

For Residential

2011 Hi-spec Design models LT Series & LU Series is released.


2017 Flagship Wall Mounted models nocria™ X is released.

2017-19 Environment-friendly new refrigerant R32 models are added. (Split & Multi-split type)



For Light Commercial

Small & lightweight outdoor unit AIRSTAGE™ J-IVL, J-IV, J-IVS outdoor units released.

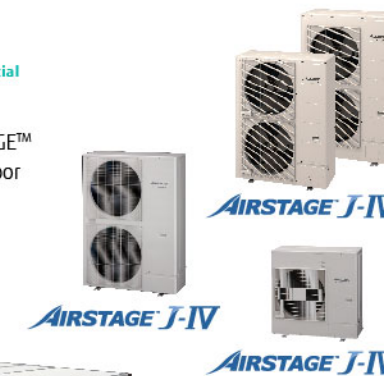

For Commercial

Heat pump type AIRSTAGE™ V-III Tropical Max. 54 HP is released.



For Residential



Split Design models KE Designer Series, New Ceiling and Air to Water Comfort Series released.



*1: Announced 1991. In room air conditioner for the home (our company's investigation) *2: Announced 1994. In room air conditioner for the home (our company's investigation) *3: Announced 2002. In room air conditioner for the home (our company's investigation)

*4: Announced 2018. In room air conditioner for the home (Our company's investigation) *5: Announced 2012. In room air conditioner for the home (Our company's investigation)



World Wide Locations

Promoting Globalization from a global perspective while emphasizing the actual local situation in the field under the aim of advancing our five-base system (Europe, Middle East, Asia & Oceania, America, and Japan)



JAPAN Head Office



New Technology Research Building (Japan)

• Air conditioner solution center "THE AIRSTAGE" in Manhattan, New York

• Fujitsu General America, Inc.

• Fujitsu General Do Brasil Ltda.

• Fujitsu General Air Conditioning (UK) Limited
• Fujitsu General (U.K.) Co., Limited

• Fujitsu General (Euro) GmbH
• Fujitsu General Commercial Air Conditioning Italia S.p.A.

• Fujitsu General Orient International Electronics Sales (Shanghai) Co., Ltd.

• Fujitsu General Limited

• Fujitsu General (Taiwan) Co., Ltd.

• Fujitsu General (Thailand) Co., Ltd. Bangkok Office

• Fujitsu General (Aust.) Pty Limited

• Fujitsu General (India) Private Limited

• Fujitsu General New Zealand Limited

• Fujitsu General (Asia) Pte. Ltd.

• Fujitsu General (Middle East) FZE

15 Overseas Sales Companies



Fujitsu General Orient International Electronics Sales (Shanghai) Co., Ltd. (China)



Fujitsu General (Taiwan) Co., Ltd. (Taiwan)



Fujitsu General (Thailand) Co., Ltd. Bangkok Office (Thailand)



Fujitsu General (Asia) PTE. Ltd. (Singapore)



Fujitsu General (Aust.) Pty Ltd. (Australia)



Fujitsu General New Zealand Ltd. (New Zealand)



Fujitsu General (Middle East) FZE (U.A.E.)



FUJITSU GENERAL SOLUTION CENTER "THE AIRSTAGE" (U.S.A.)



Fujitsu General (EURO) GmbH (Germany)



Fujitsu General (U.K.) Co., Ltd. (U.K.)



Fujitsu General Air Conditioning (UK) Limited (U.K.)



Fujitsu General Commercial Air Conditioning Italia S.p.A. (Italy)



Fujitsu General Do Brasil Ltda. (Brasil)



Fujitsu General (India) Private Limited




Fujitsu General America, Inc. (U.S.A.)



Global Business Activities

We are engaging in advertising, human resource development, CS activities, and social contribution activities worldwide. These activities have been recognized throughout different regions by the awards we have been honored with.

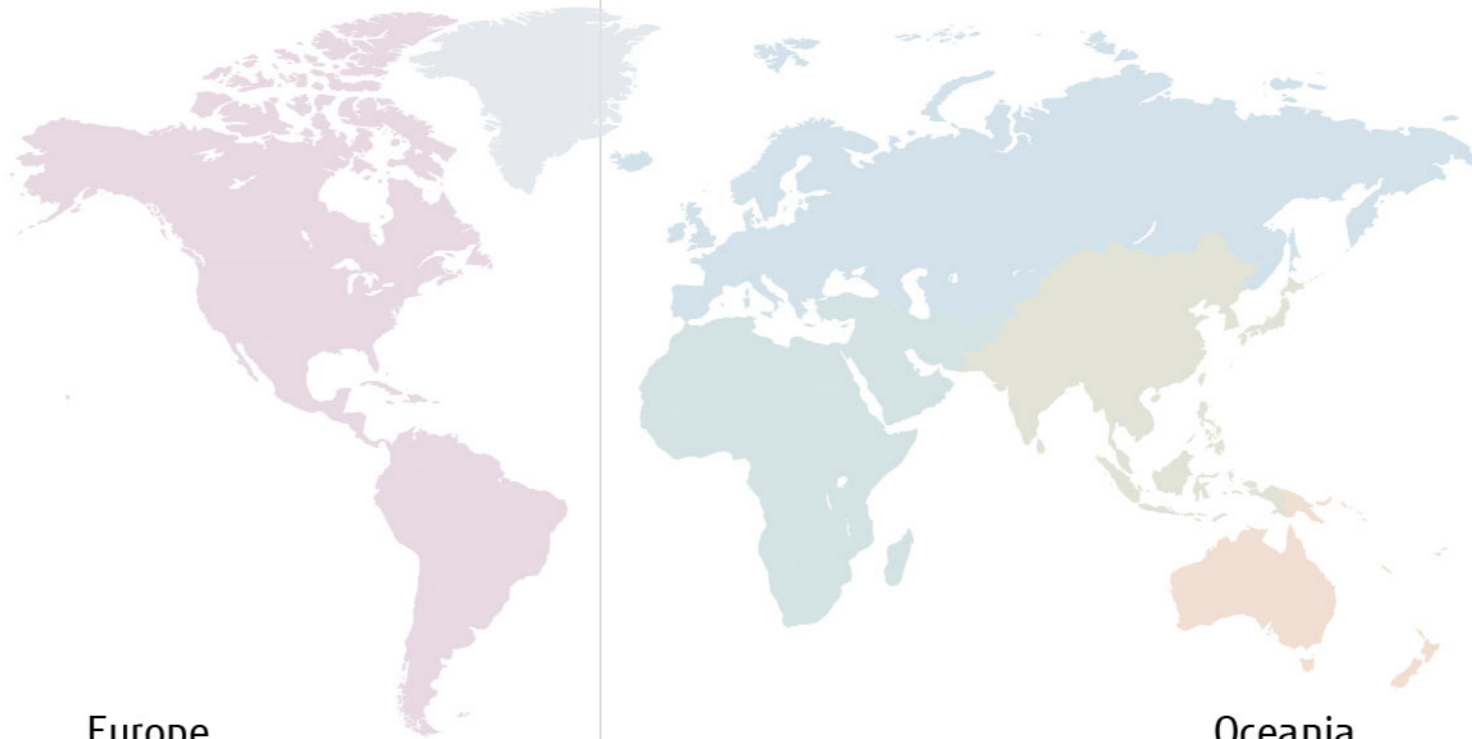

North/South America



AHR Expo

Middle East




Exhibition

Europe



HVAC trade show in Europe countries

Oceania

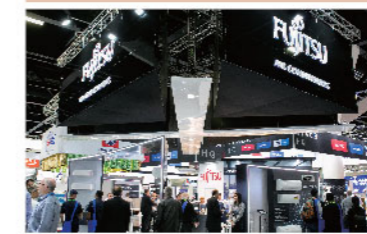

HVAC trade show in Australia

Asia



New Product Presentation Meeting



HVAC trade show in Brasil



Dealer Convention in Kuwait



HVAC trade show in Europe countries



Dealer Convention in Thailand



Distributor meeting



Technical seminar



ACR Show



Charity (Christchurch)



Training



Call center



Training for dealers



Presentation & training



Service & Maintenance



Call center

International authoritative design awards



"Dealer Design Awards" of "the NEWS"



Gold Award (Category: HVAC & PLUMBING) in Reader's Choice Awards



TOP OF MIND 2016[®] First prize in "MARCA DE EQUIPAMENTO DE AR-CONDICIONADO" category of "CLIMATIZACAO" division



Super brand is the world's largest independent arbiter of branding



The iF Product Design Award is given each year by "iF International Forum Design GmbH" for industrial products from around the world.



reddot winner 2020

The product design competition has existed since 1955. Its award, the "red dot", is an internationally recognized quality seal.



Coolworld Industry Awards "Most Efficient Air Conditioner"



Canstar Blue Most Satisfied Customers Award



China State Construction Engineering Luban Prize




GOOD DESIGN

The Good Design Award is sponsored by the Japan Institute of Design Promotion and is awarded once a year for an item of excellent design.




Project Reference

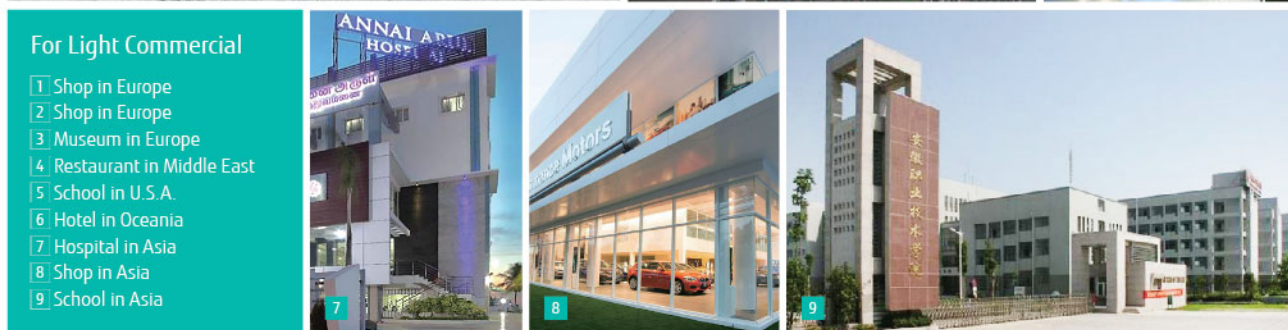

For Light Commercial

- 1 Shop in Europe
- 2 Shop in Europe
- 3 Museum in Europe
- 4 Restaurant in Middle East
- 5 School in U.S.A.
- 6 Hotel in Oceania
- 7 Hospital in Asia
- 8 Shop in Asia
- 9 School in Asia

Our product is popular because of its high quality, energy saving, and easy installation, and so has been installed in a wide range of building types including high-rise office buildings, stores, hotels, public facilities, schools, hospitals and residential.

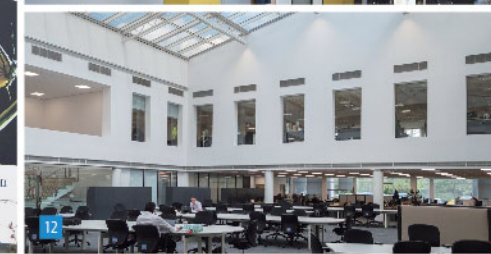

- ## For Commercial
- 10 Office in Europe
 - 11 Office in Europe
 - 12 Office in Europe
 - 13 Office in Asia
 - 14 Hospital in Asia
 - 15 Hotel in Asia
 - 16 Hotel in Asia



Fujitsu General's Products have been installed in over 50 countries worldwide.



- ## For Residential
- 17 Residential in Europe
 - 18 Residential in Europe
 - 19 Residential in Oceania
 - 20 Residential in Middle East



Global Development & Production Bases

R&D centers are set up in five countries of Japan, Europe, Asia, China and North America in the world. We pursue the environmental property and comfort to meet each area needs.

- Head Office
- R&D Center
- Manufacturing Companies

R&D Center & Technology Research Building



R&D Center in Fujitsu General (EURO) GmbH (Germany)



R&D Center in Fujitsu General America (U.S.A.)



Fujitsu General Air Conditioning R&D (Thailand) Co., Ltd. (Thailand)



R&D Center in Fujitsu General (Shanghai)



JAPAN Head Office, R&D Center and 60 m Height Difference Testing Tower (Japan)

Technology Research Building in Japan Head Office



Construction of Manufacturing That Utilizes the IoT

We will introduce a real-time IoT System to immediately visualize and analyze a variety of information (e.g., the facility operating situation, production progress on assembly lines, and the inventory and transportation situation of parts). This will enhance the accuracy of production and shipping forecasts in the Head Office and Factory Management Department. In addition, we will also utilize this in the improvement activities of employees in production sites with the aim of improving the productivity efficiency, parts distribution efficiency and facility operating ratio.



Overseas Manufacturing Companies



Fujitsu General (Shanghai) Co., Ltd. (China)



F.G.L.S Electric Co., Ltd. (China)



Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd. (China)



New Fujitsu General (Thailand) Co., Ltd. (Thailand) FACTORY-2



Fujitsu General (Thailand) Co., Ltd. (Thailand)



Fujitsu General Air Conditioning R&D (Thailand) Co., Ltd. (Thailand)



FGA (Thailand) Co., Ltd. (Thailand)



TCFG Compressor (Thailand) Co., Ltd. (Thailand)



High Quality Development & Production Facilities

Advanced Research Facility and Equipment

Performance Testing



Air Volume Measurement Room
Measure air volumes of the air conditioners from compact room air conditioner models to VRF.



Calorimeter
Measure the cooling/heating capacity by measuring the inlet and outlet temperatures, humidity, and air volume of the air conditioner.



Silent Room
Measure the operating sounds of air conditioners with the sound reflection-proof walls and ceiling.

Fujitsu General is one of Japan's leading manufacturers with an R&D Center in Japan. We provide customers with the highest quality and performance using these facilities.

Reliability Testing



Constant Temperature Room
Check on the product performance in cooling/heating operation under the various temperature and humidity conditions.




Practical Test Room
Check on whether the air conditioners performance under the actual house conditions is sustainable.



Shower Test Room
Check on whether the electrical box of the outdoor unit is protected by rain waters with Typhoon like wind.

Transportation & Handling

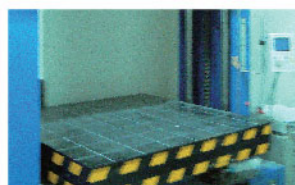

Compressibility testing



Vibration testing



Technology Research Building in Japan Head Office

Testing Laboratory

Fujitsu General EMC Laboratory Limited




60 m Height Difference Testing Tower

Objective is to confirm oil circulation of compressor for reliability



Acquisition of ISO 9001 and ISO 14001

■ ISO 9001
■ ISO 14001
() Number of companies

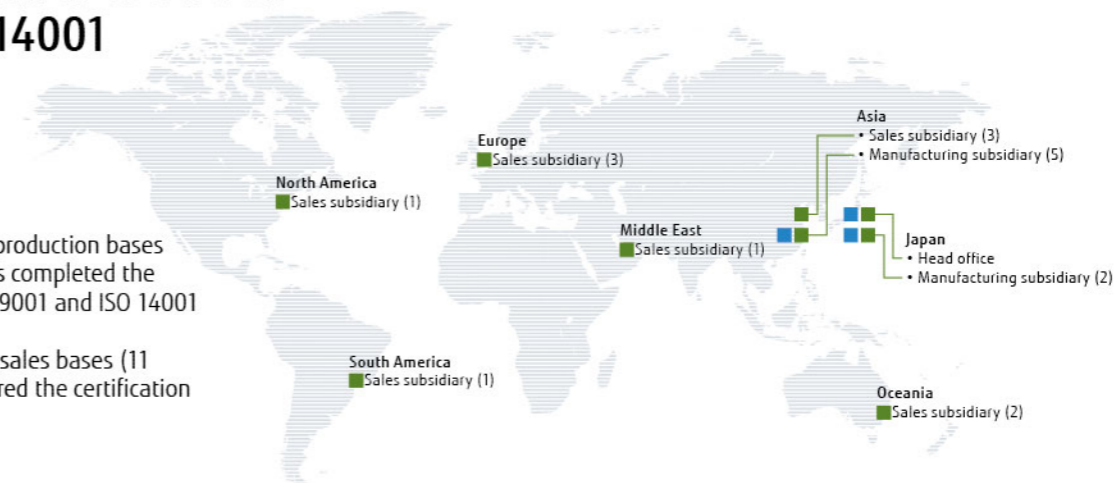

Each of overseas production bases (5 companies) has completed the acquisition of ISO 9001 and ISO 14001 individually. In 2012, overseas sales bases (11 companies) acquired the certification of ISO 14001.

High Product Quality Assurance


All Fujitsu General factories have acquired ISO 9001, and have built a quality control system common around the world. High quality products are offered to all over the world based on stringent quality inspections.

Receiving inspection

Parts procurement requires a supplier's test report. European regulation RoHS inspection is also performed by special test department in-house. Total number inspection is performed especially on main parts to remove defectives.

Stringent product quality inspection

Stringent quality inspection is carried out at all production processes. High quality is maintained by stringent checks by inspectors and repetitive inspection.

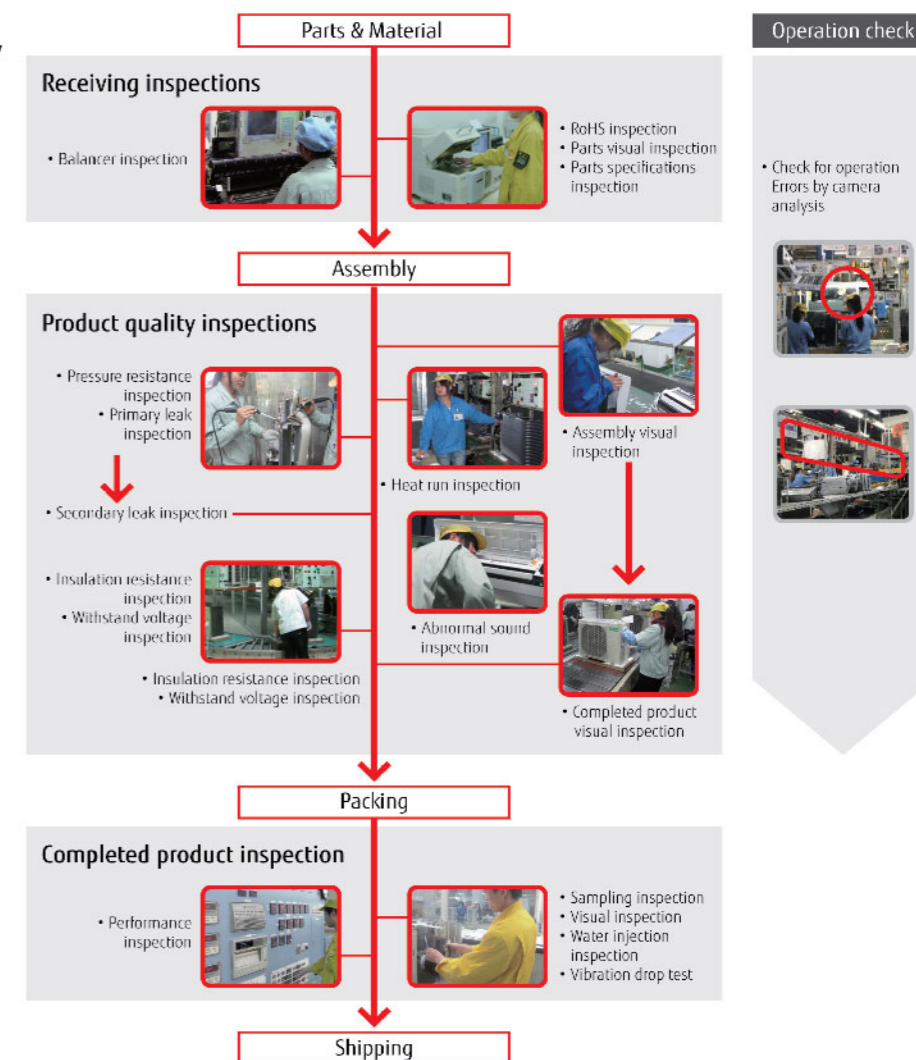

Operation check

Check for operation Errors by camera analysis



AIRSTAGE™ J Series Overview



NEW Max. 18 HP Heat Pump
AIRSTAGE™ J-IVL

J-IVL is an outdoor unit with a slim design offering a high degree of freedom of installation that is recommended for mid-size office buildings and hotels. Furthermore, you can connect up to 42* indoor units with newly added 14/16/18 HP models. 14/16/18 HP models are also ideal for hospitals and educational facilities with many rooms.

*: 18 HP model

Slim Outdoor Unit

Although the new 14/16/18 HP models that can handle slightly larger capacity requirements, they have a slim depth of 480 mm. These models can be introduced and installed even in limited spaces.

Small room application

Up to 30-42 indoor units can be connected by the optimum heat exchanger structure. Available to various small rooms.

Top Class Low Operating Sound

Top class low operating sound is achieved. Highly suited for densely populated areas thanks to their low operating sound.

NEW Max. 6 HP Heat Pump, Compact Design
AIRSTAGE™ J-IVS

J-IVS has a compact design with a height of 998 mm that does not obstruct visibility even when installed near waist-level windows. This model is also ideal for large houses, retail stores and other properties.

Space saving and low sound level design

Economical individual air conditioning is achieved by ALL-DC technology, large capacity DC twin rotary compressor, and 3-row heat exchanger though the size is compact.

Flexible systems for homes, shops, small-size buildings air conditioning

Due to compact size design and flexible piping design, J-IVS Series can be installed easily at a place where the installation space is limited such as homes, shops, and small offices. Multiple indoor units of various capacities and types can be connected.



8-12 HP models



14/16/18 HP models



4/5/6 HP models

AIRSTAGE™ V Series Overview

AIRSTAGE™ V Series Systems can be designed to effectively provide an air conditioning solution from a large domestic residence through to a large scale commercial building.



NEW Max. **54 HP** Heat Pump
AIRSTAGE™ V-III **TROPICAL SPEC**

Fujitsu General tropical VRF is designed for tropical weather. Extensive lineup from 8 HP to 54 HP in 2 HP increment. Connectable indoor unit capacity ratio up to 150%

outdoor temperature
Up to 52°C
 at Cooling



High ambient operation design

Possible to operate cooling up to 52°C outdoor temperature

Powerful cooling capacity design

Keeping high cooling power at even high ambient temperature

Anti-corrosion treatment design

All metallic and PCB components are protected against corrosion

VRF Outdoor Units Lineup

Capacity (kW) HP	12.1 4	14.0 5	15.1-15.5 6	22.4 8	28.0 10	33.5 12	40.0 14	45.0 16	50.0-50.4 18	55.9 20	61.5 22	67.0 24	73.5 26	78.5 28	85.0 30	90.0 32	95.0 34	100.5 36	107.0 38	112.0 40	118.5 42	123.5 44	130.0 46	135.0 48	140.0 50	145.0 52	150.0 54	
NEW J-IVL Series																												
				AJH072 LELBH	AJH090 LELBH	AJH108 LELBH	AJH126 LELBH	AJH144 LELBH	AJH162 LELBH																			
NEW J-IVS Series																												
	AJH040 LCLBH	AJH045 LCLBH	AJH054 LCLBH																									
NEW V-III Tropical Series Heat Pump																												
Space Saving																												
Set Model				AJH072 LNTCH	AJH090 LNTCH	AJH108 LNTCH	AJH126 LNTCH	AJH144 LNTCH	AJH162 LNTCH	AJH180 LNTCH	AJH198 LNTCH	AJH216 LNTCH	AJH234 LNTCH	AJH252 LNTCH	AJH270 LNTCH	AJH288 LNTCH	AJH306 LNTCH	AJH324 LNTCH	AJH342 LNTCH	AJH360 LNTCH	AJH378 LNTCH	AJH396 LNTCH	AJH414 LNTCH	AJH432 LNTCH	AJH450 LNTCH	AJH468 LNTCH	AJH486 LNTCH	
Energy Efficiency																												
Set Model							AJH144 LNTCHH	AJH162 LNTCHH	AJH180 LNTCHH			AJH216 LNTCHH	AJH234 LNTCHH	AJH252 LNTCHH	AJH270 LNTCHH	AJH288 LNTCHH	AJH306 LNTCHH	AJH324 LNTCHH	AJH342 LNTCHH	AJH360 LNTCHH	AJH378 LNTCHH	AJH396 LNTCHH	AJH414 LNTCHH					




Feature

High Efficiency

Efficiency is improved significantly by using DC twin rotary compressor, inverter technology, and large heat exchanger




DC twin rotary compressor

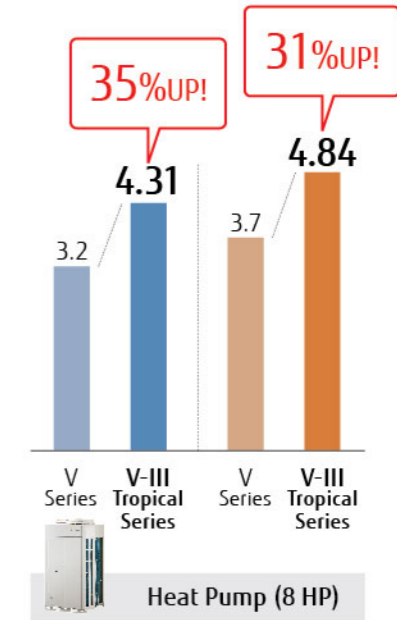


ALL DC High efficiency design with top class SEER/SCOP

All VRF Series including J-IVL Series have DC technology to achieve high efficiency operation. This enhances the durability and reliability of VRF Series.

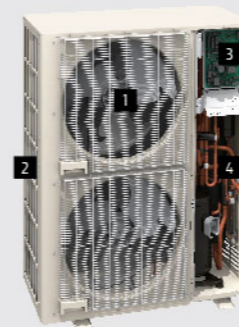



J-IVL Series



J-IVS Series



V Series


 1 DC fan motor	 3 DC inverter control
 2 Large heat exchanger	 4 Subcool heat exchanger

 1 3 phase DC fan motor	 3 Sine-wave DC inverter control
 2 Large heat exchanger	 4 Subcool heat exchanger

Operation Performance is Efficiently Controlled.


Room temperature set point limitation

The minimum and maximum temperature ranges can be limited, which provides further energy saving while maintaining the comfort of the occupants.

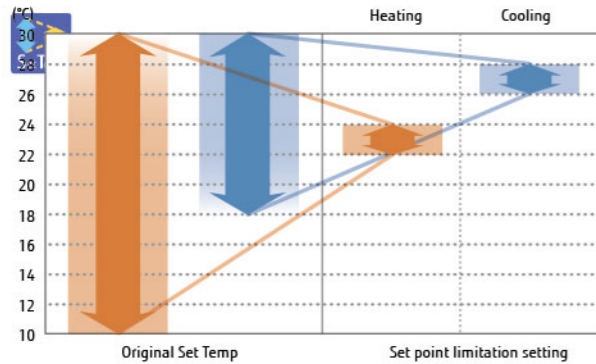


Auto-off timer

New wired remote controller is equipped with an OFF timer function that automatically stops operation when a fixed time has elapsed from the start of operation. This prevents waste of energy. Furthermore a new wired remote controller can set up the interval of time in case operation stops.

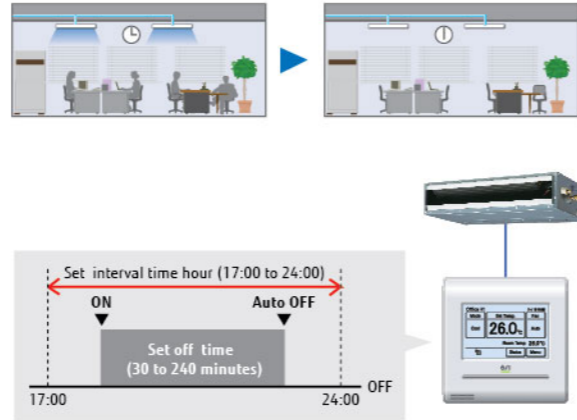


Energy saving management

A variety energy saving operations can be set and managed depending on the season, weather, and time period. Excellent energy saving operation is performed by using System Controller.

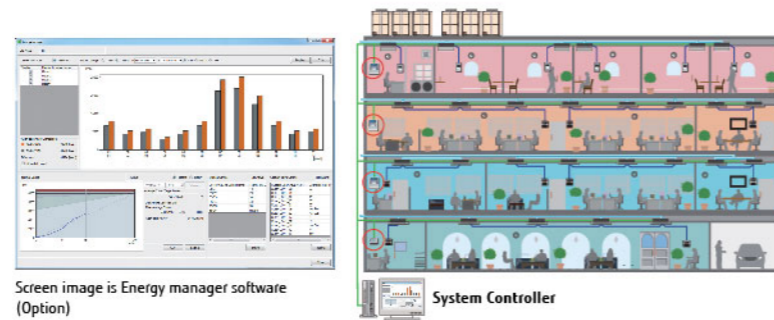


Capacity save operation

Operation capacity can be set in 5 steps for rated capability. The power consumption at peak is cut down and the maximum load is suppressed.

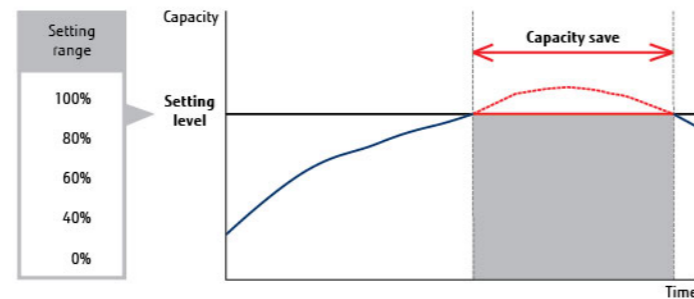

New intelligent refrigerant control

Fujitsu general proposes New outdoor unit which includes New refrigerant control. New refrigerant control can be operated with suitable control corresponding to heat load of the room and can offer a more comfortable space. New refrigerant control can also provide more energy savings.


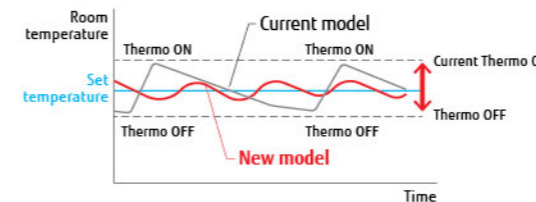


Current refrigerant control

Thermostat-ON/OFF occurs frequently. →The comfort is not good since room temperature often changes. Energy saving is not good since compressor is repeated starting and stopping frequently.

New refrigerant control

Room temperature keep target temperature since thermostat-ON/OFF occurs less than Current control. Energy saving is good since compressor continues operation for a longer time than Current control.

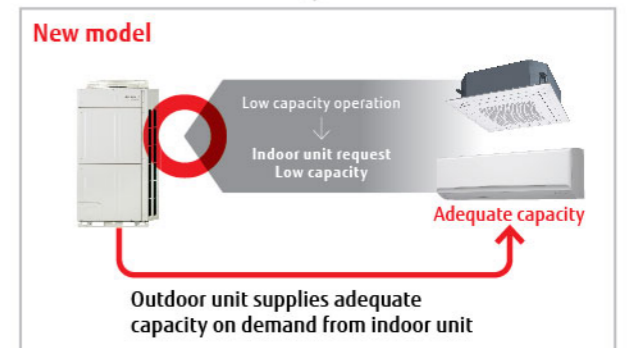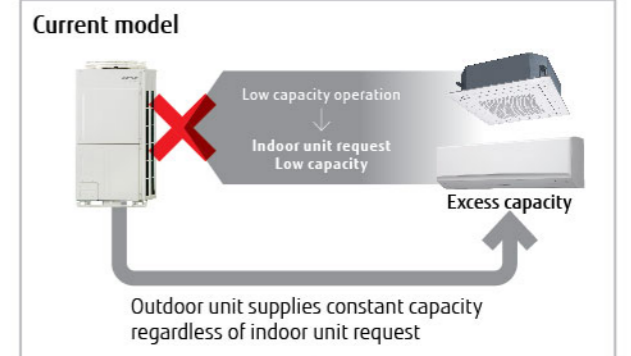


* The improvement by the control and the actual sine wave varies by the combination of the indoor unit and system operating condition.

More Comfort




Auto changeover function

In Auto setting, the cooling/heating mode is automatically switched according to the set temperature and room temperature.

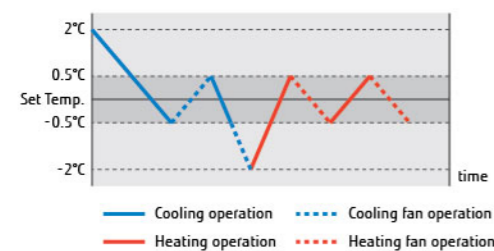


Auto changeover setting allows for the indoor unit to easily switch between cooling and heating regardless of the operation mode of other indoor units. This can be done via specific indoor unit with wired remote controller. This ensures comfortable operation all year round.

Automatic cooling/heating operation for each room is possible

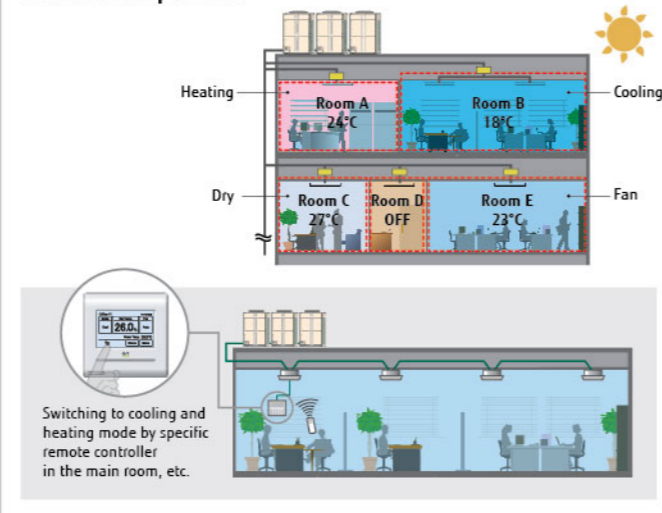

Precision refrigerant flow control


Precise and smooth refrigerant flow control is achieved by using a DC Inverter control in conjunction with individual indoor unit electronic expansion valve control. This allows high precision comfortable temperature control of $\pm 0.5^\circ\text{C}$.

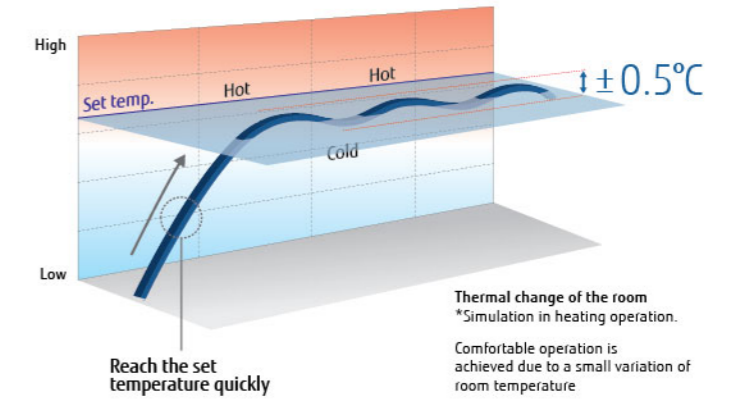

Quiet operation


Quiet operation

Two low noise modes can be selected automatically by quiet priority setting and capacity priority setting depending on the indoor environment and outside temperature load. This feature can be controlled via outdoor unit external input and/or system controller.

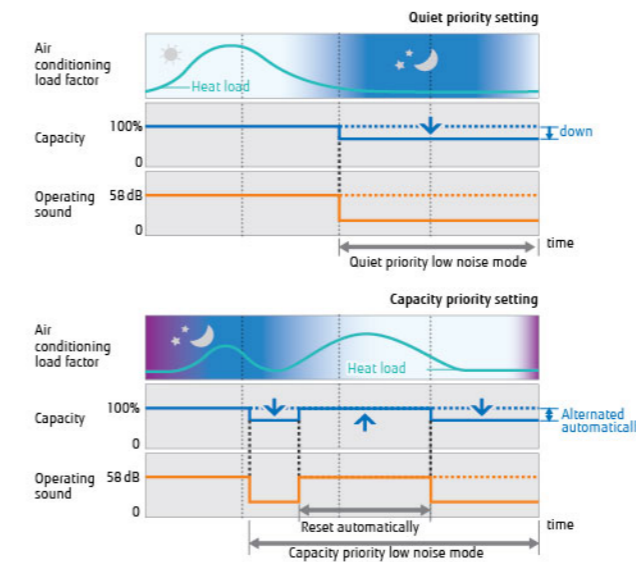

Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

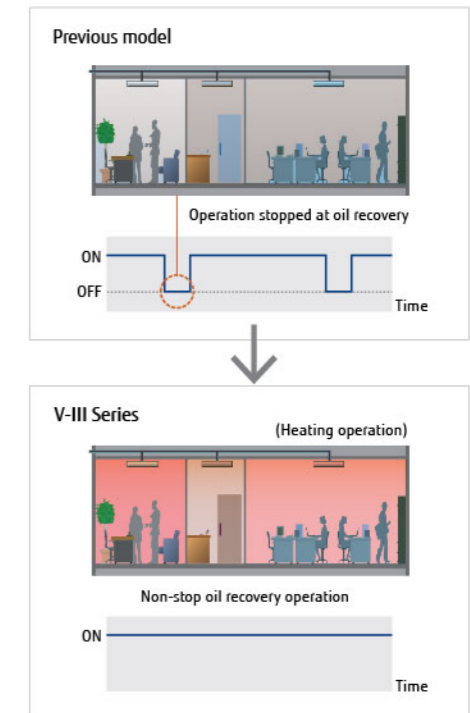

Low sound level design


Small capacity indoor units respond to the demands of several applications. These models will be able to offer greater audibility comfort by operating at super low sound levels. Especially, Wall mounted (EEV external) type is 19dB(A) when low mode heating operation.



High Reliability

Outdoor unit rotational operation

The compressor starting order is rotated so that the running time is shared.

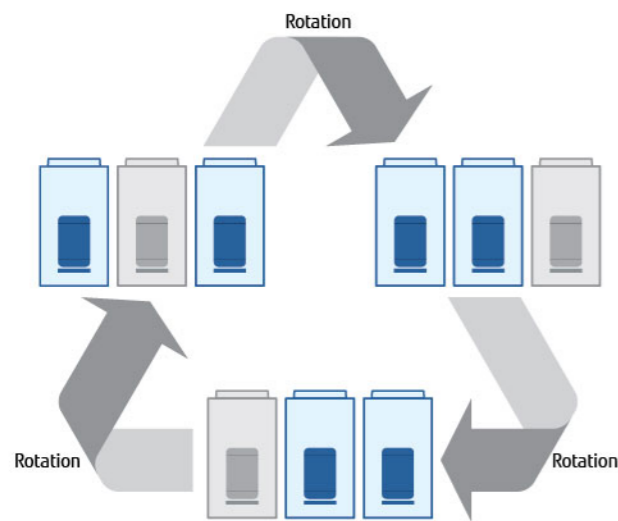


Note: Rotational operation is alternated by the start / stop timing of the compressor.

Backup operation


If one compressor fails, backup operation will be performed by the remaining compressors*.

*: Note: Backup operation may not be possible depending on the trouble state.

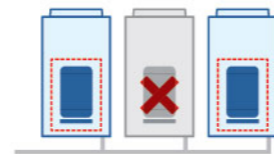


Advanced refrigerant control

Innovative compressor control logic has been introduced in order to balance the refrigerant mass flow rate of each outdoor unit by controlling the inverter speed.

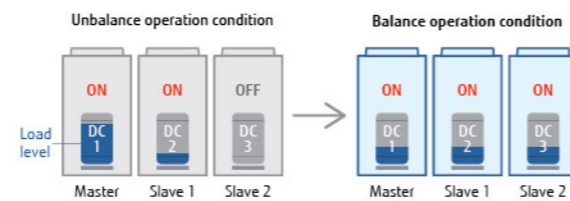



Liquid flow back protection

By adopting a large sized accumulator, not completely vaporised refrigerant stays inside of the accumulator to ensure no liquid refrigerant is being fed into the compressor.

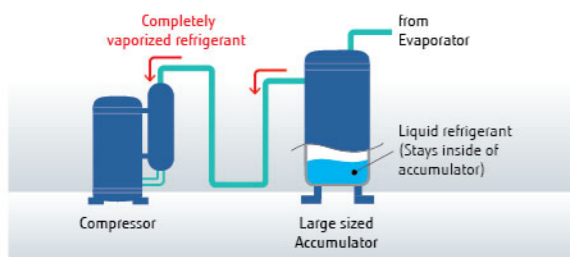

Adoption of blue fin heat exchanger


Corrosion resistant of the heat exchanger has been improved by the introduction of blue fin treatment to the outdoor unit's heat exchanger.

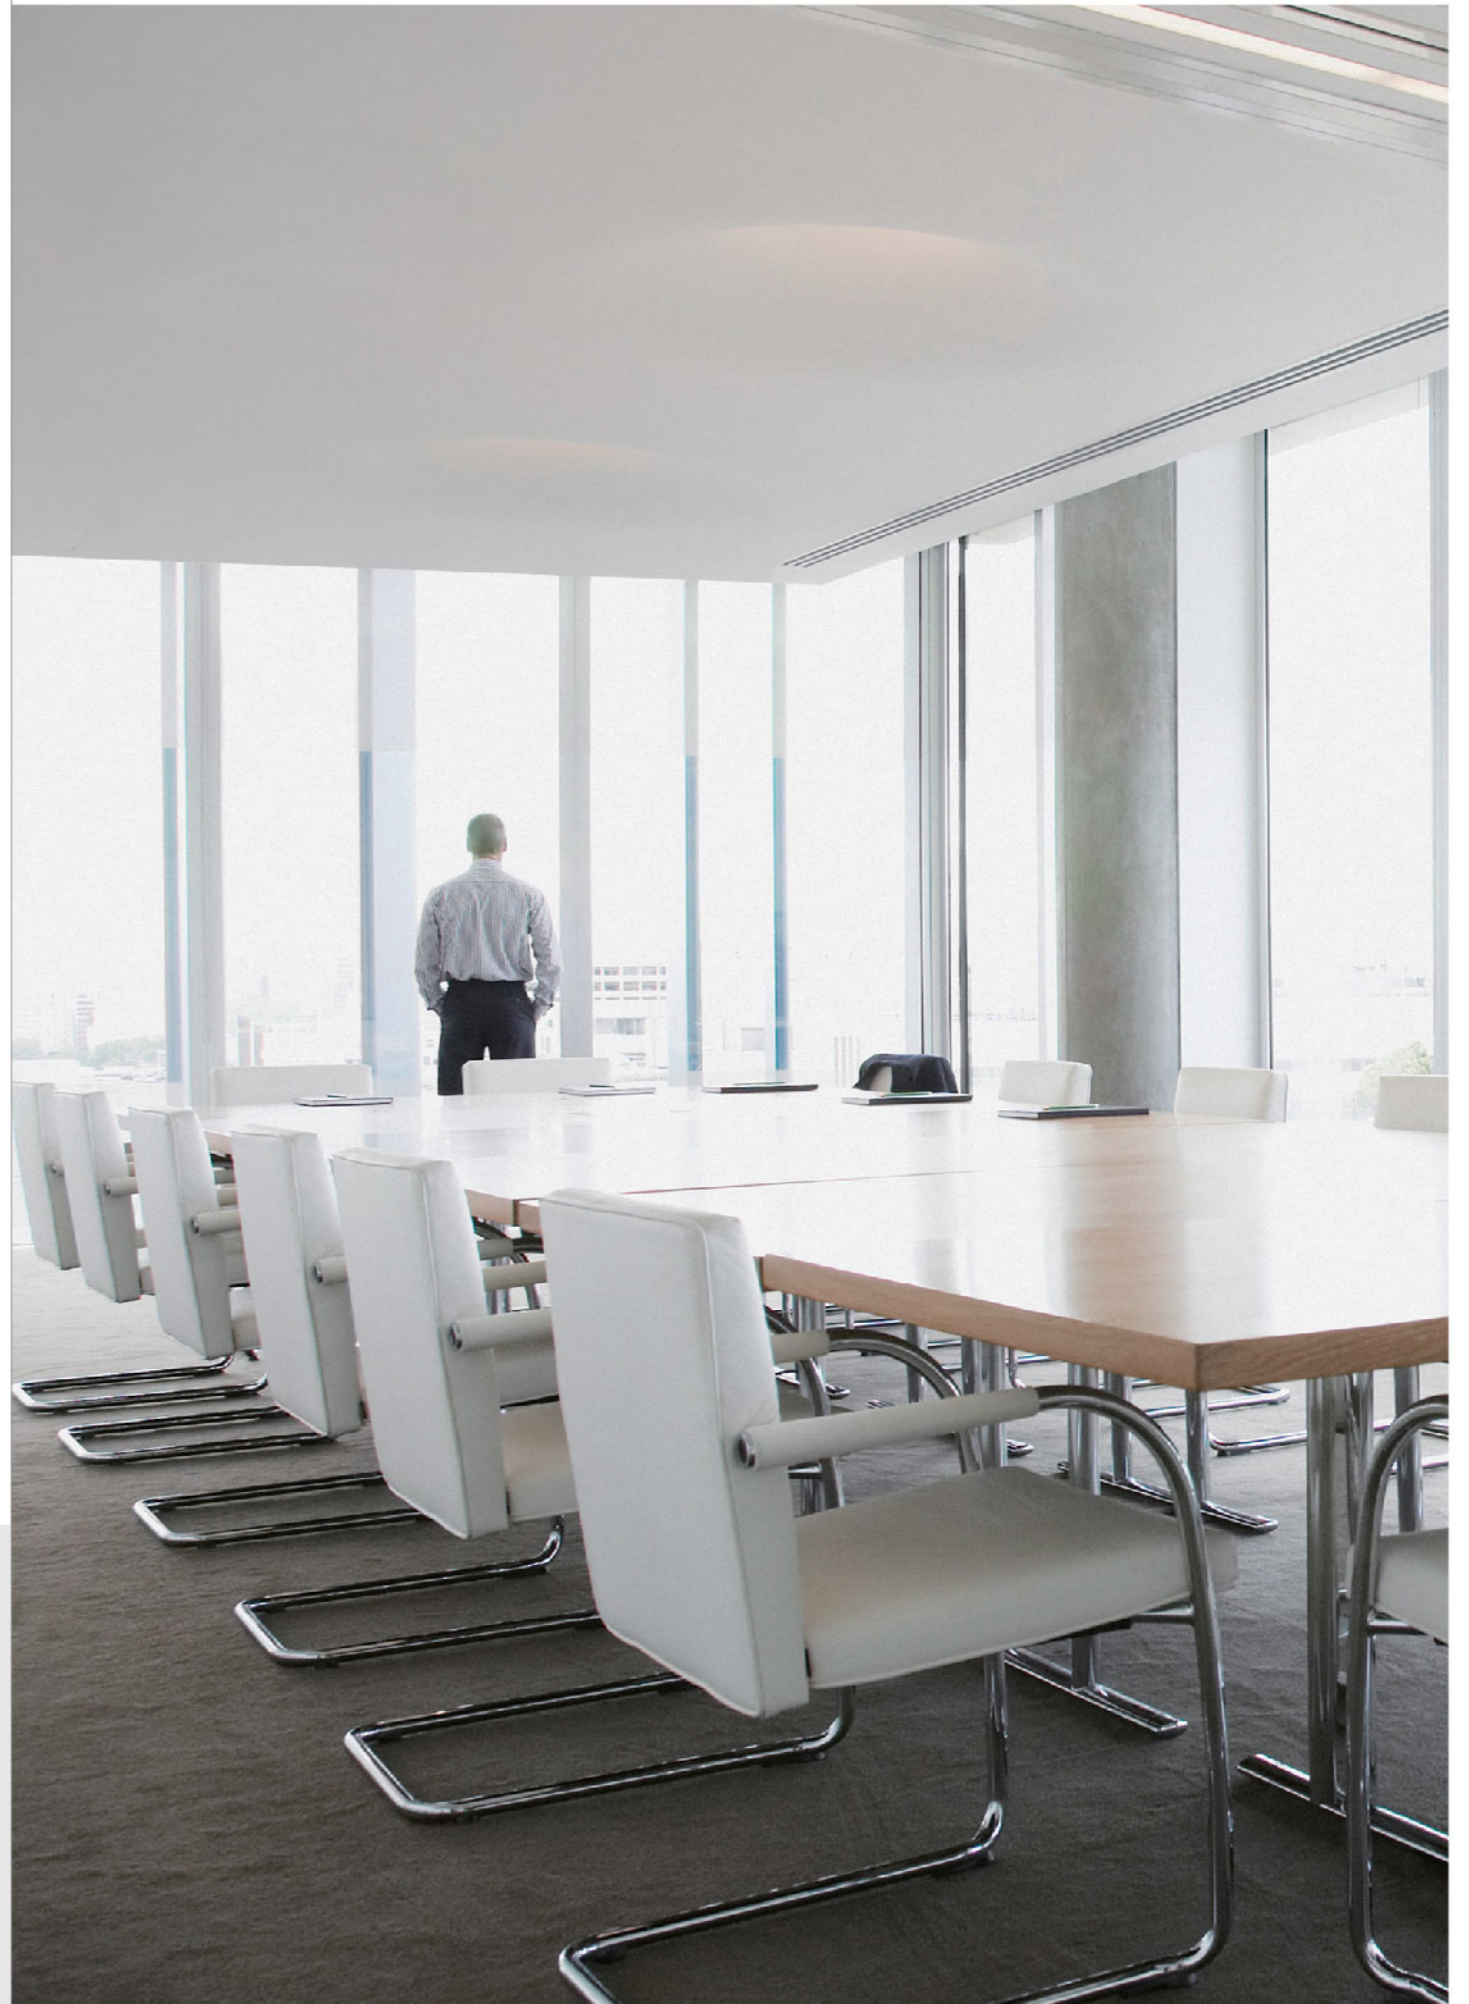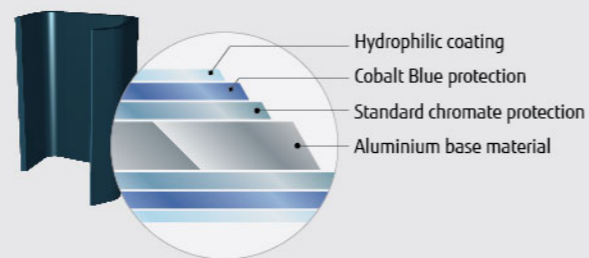

Design Flexibility


Top class Compact design

Compact outdoor unit can be achieved at the top class in the industry by optimal airflow structure design. (Up to 18 HP)

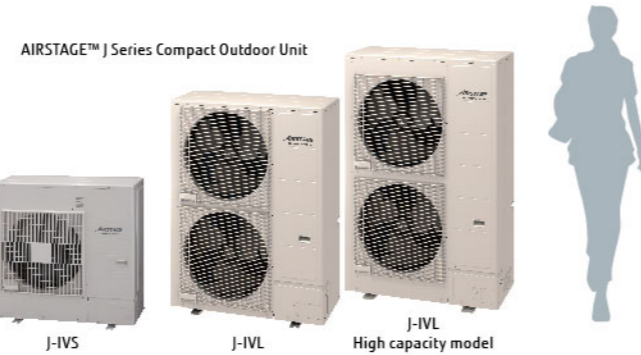


Long piping design

Piping design suitable for long, narrow office buildings with a difference in height and low-rise shops with high distance (AIRSTAGE™ J-IVL Series)

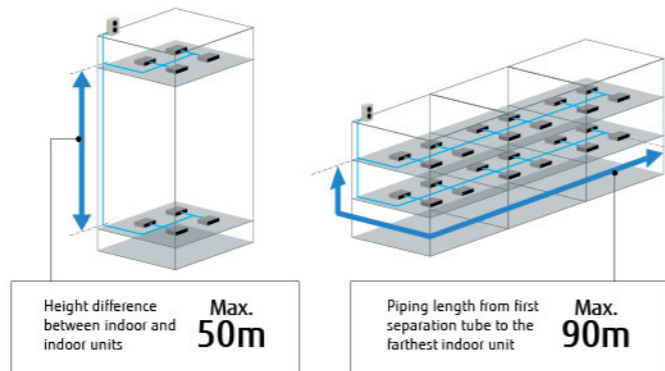

Overall piping length Max. 1,000 m

World's top class overall piping length of 1,000 m allows for application in a wide variety of buildings.

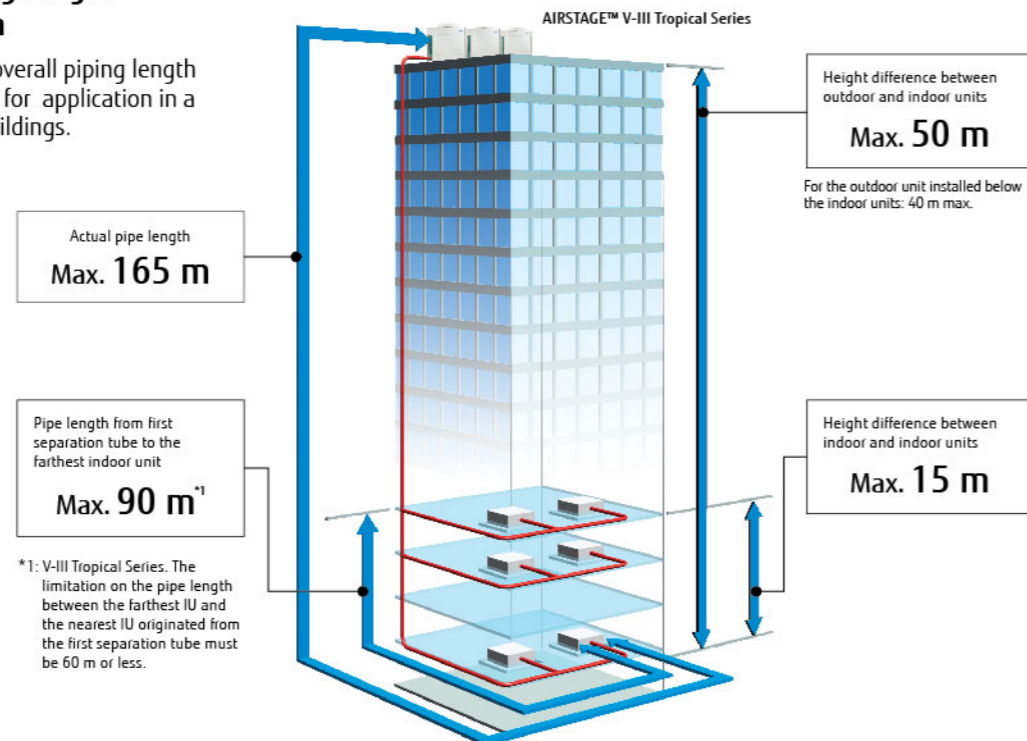

High capacity connection

Series	Connectable indoor unit capacity range	Connectable indoor unit number
AIRSTAGE™ J-IVL Series 14/16/18 HP Heat Pump type	50% to 150% ^{*2}	up to 42 ^{*4}
AIRSTAGE™ J-IVL Series 8/10/12 HP Heat Pump type	50% to 150% ^{*2}	up to 30 ^{*5}
AIRSTAGE™ J-IVS Series Heat Pump type	50% to 130% ^{*2}	up to 13
AIRSTAGE™ V-III Tropical Series Heat Pump Modular type	50% to 150% ^{*3}	up to 55

^{*2}: Conditions of maximum connectable indoor unit capacity ratio is as the chart.
^{*3}: Max. capacities in the combinations including the 18 HP outdoor unit fall below 150%.
^{*4}: J-IVL Series 18 HP model only.
^{*5}: J-IVL Series 12 HP model only.


Designed for low refrigerant charge

Optimal design of indoor unit and outdoor unit reduces the refrigerant volume and special support is not required even when installing in a small room of about 15 m².



Various optional parts

- Intake fresh air with our Fresh Air Intake kit
- Comfortable temperature control with a remote sensor
- Operation by linking up to ventilation equipment and air handling unit with the DX-Kit

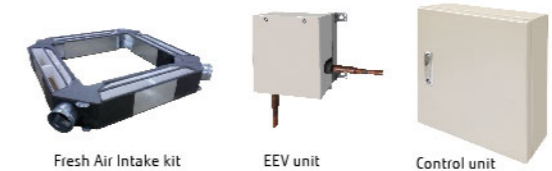

Low ambient operation


Refrigeration cycle technology allows cooling operation even at -15°C.



Wide operating range

Installation in extreme temperature conditions is possible due to an increase in operational range.

^{*8}: Note: When a multiple outdoor unit connection is used, operating range is from -5°C to 46°C in cooling.
^{*9}: Only when all indoor units are 5.6 kW or more in the system, the operation range is -15°C to 46°C.

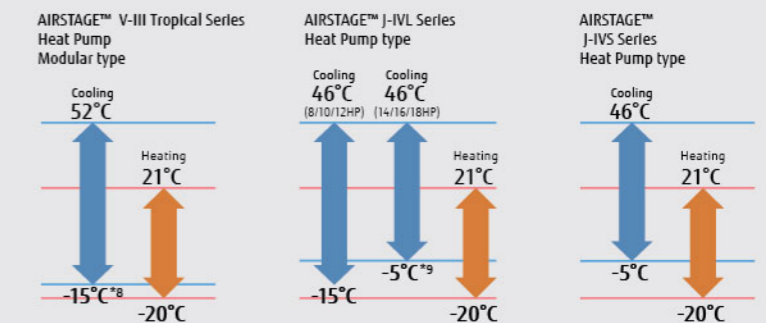

Easy Installation



Easily transported



Easily craned using lifting belt hooks
Design of outdoor unit allows for lifting straps to be used




Transporting by forklift
Transport with forklift is possible.



Can be transported in a small lift

Easy access

By adopting a L-Shape front panel that can be removed, the work space for installation and service has been significantly expanded by this new design. For multiple installations, work is performed easily and efficiently even in a narrow space.

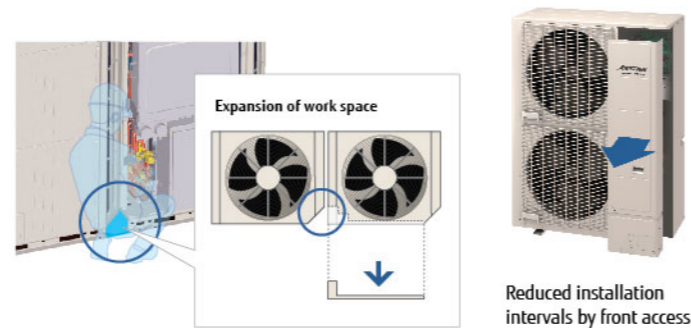


Flexible piping connection

Piping and wiring are available to the front, left right and bottom.



Simple wiring work

Installation of the wiring systems is made easier as the communication wiring can be installed continuously between the indoor, outdoor and RB units.

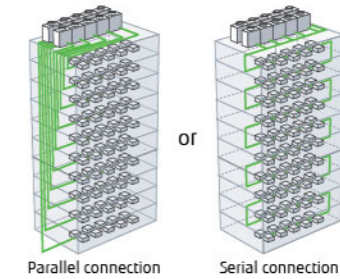


Up to maximum length
3,600 m

Note: Serial connection can't use the automatic address setting in a multiple refrigerant system.


Easy evacuation - using vacuum mode function

The vacuum mode function enables all expansion valves of indoor units to be fully opened, making it easy to evacuate all the air inside pipe lines and indoor units.

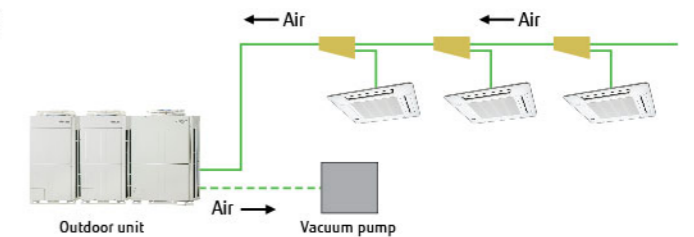

Automatic address setting

The address of the indoor unit, RB unit and signal amplifier through the automatic function setting on the outdoor unit PCB.

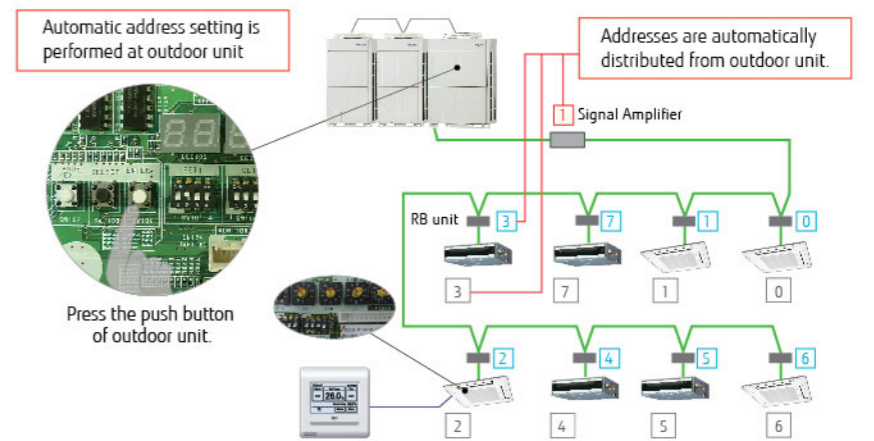

Easy commissioning by Service Tool


Service tools can be used to check the refrigerant temperature, pressure, and the operating status of the electronic expansion valve, making it easy to determine whether the units are connected properly.



Easy Service & Maintenance

Design for Easy Maintenance

7 segment LED is used to make it easy to check the details about the function setting status, refrigerant temperature, pressure, compressor operation time, and other factors for each model to make it easy to perform self-diagnostics.

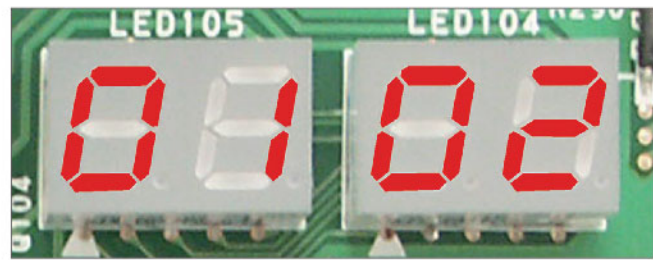


Easy to read 7-segment LED :

Confirm detailed operational and error status without using any specific equipment.

Error status can be checked easily by outdoor unit display

- Operation mode status
- Discharge temperature/Pressure status
- Compressor operation indication
- Address/type/number of outdoor unit


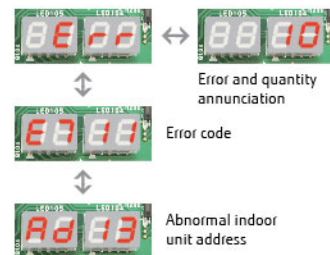


- Error status can be checked easily by outdoor unit display



Movable PCB panel

Easier for maintenance work behind the PCB

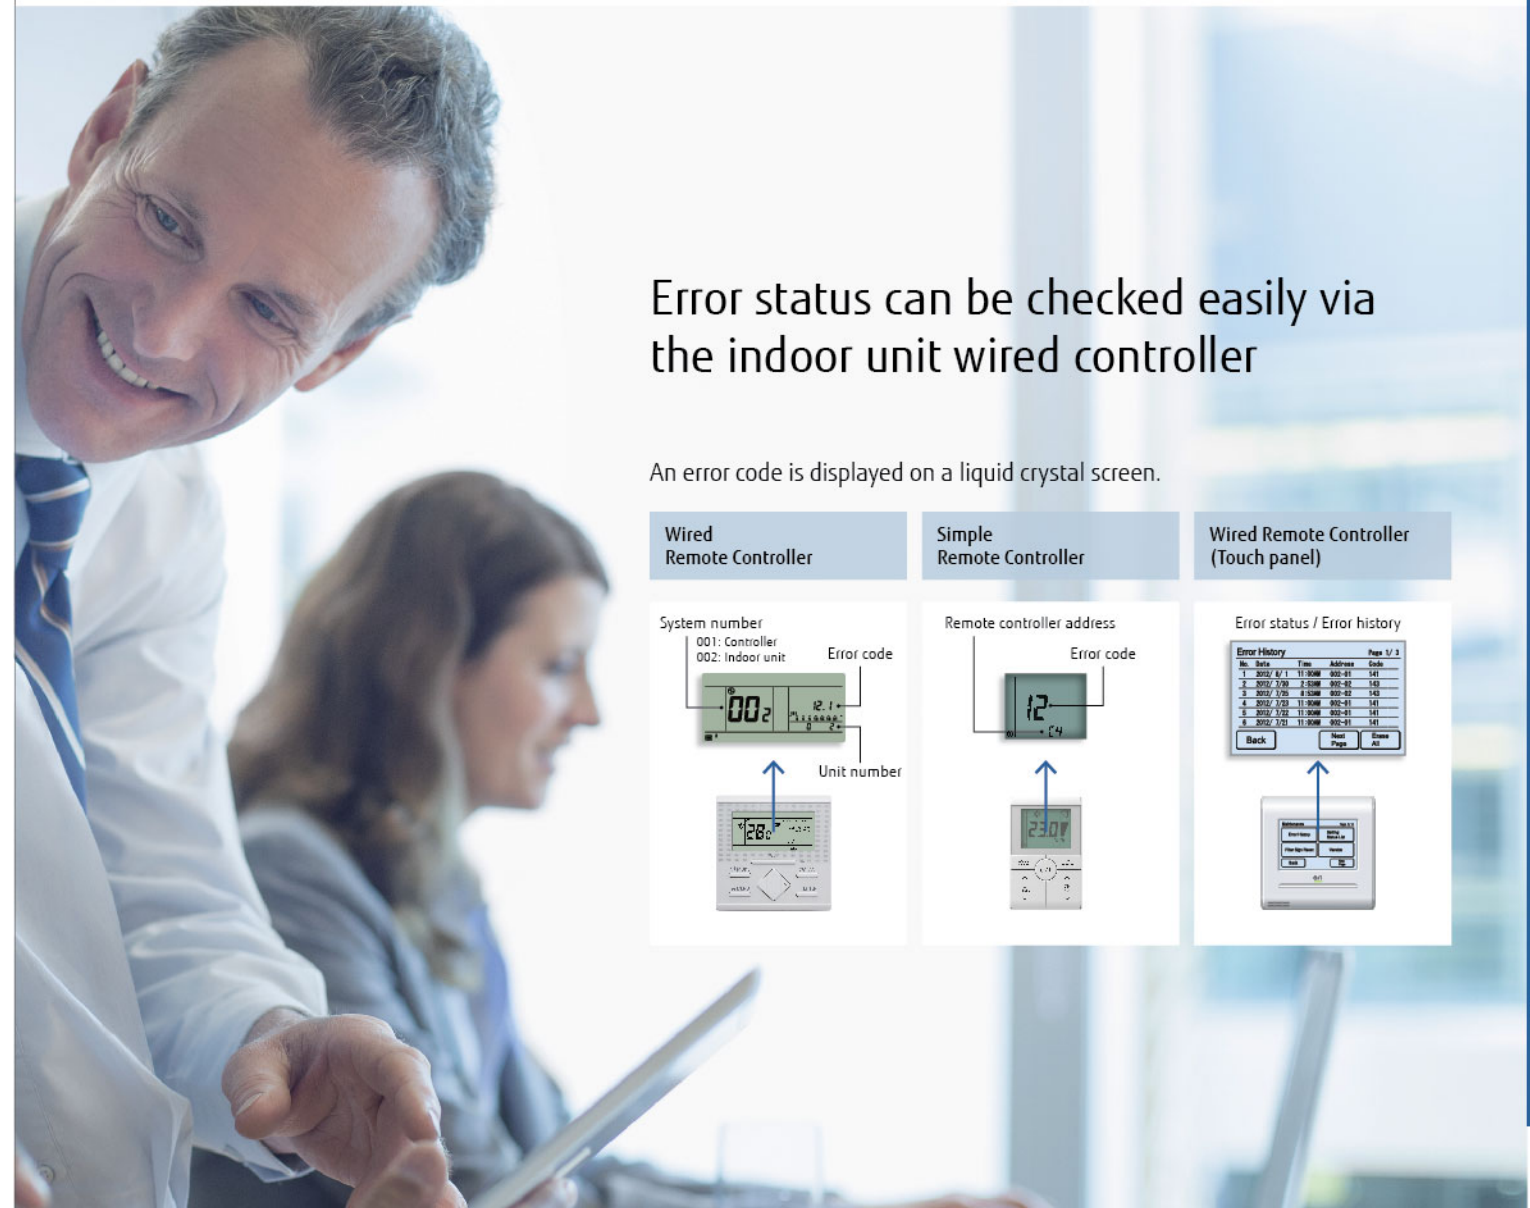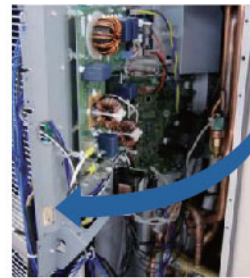

Error status can be checked easily via the indoor unit wired controller


An error code is displayed on a liquid crystal screen.

Wired Remote Controller	Simple Remote Controller	Wired Remote Controller (Touch panel)																																			
<p>System number 001: Controller 002: Indoor unit</p> <p>Error code</p> <p>Unit number</p>	<p>Remote controller address</p> <p>Error code</p>	<p>Error status / Error history</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Date</th> <th>Time</th> <th>Address</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2012/11/11</td> <td>11:00AM</td> <td>002-01</td> <td>141</td> </tr> <tr> <td>2</td> <td>2012/11/11</td> <td>11:00AM</td> <td>002-01</td> <td>141</td> </tr> <tr> <td>3</td> <td>2012/11/11</td> <td>11:00AM</td> <td>002-01</td> <td>141</td> </tr> <tr> <td>4</td> <td>2012/11/11</td> <td>11:00AM</td> <td>002-01</td> <td>141</td> </tr> <tr> <td>5</td> <td>2012/11/11</td> <td>11:00AM</td> <td>002-01</td> <td>141</td> </tr> <tr> <td>6</td> <td>2012/11/11</td> <td>11:00AM</td> <td>002-01</td> <td>141</td> </tr> </tbody> </table> <p>Back Home Power</p>	No.	Date	Time	Address	Code	1	2012/11/11	11:00AM	002-01	141	2	2012/11/11	11:00AM	002-01	141	3	2012/11/11	11:00AM	002-01	141	4	2012/11/11	11:00AM	002-01	141	5	2012/11/11	11:00AM	002-01	141	6	2012/11/11	11:00AM	002-01	141
No.	Date	Time	Address	Code																																	
1	2012/11/11	11:00AM	002-01	141																																	
2	2012/11/11	11:00AM	002-01	141																																	
3	2012/11/11	11:00AM	002-01	141																																	
4	2012/11/11	11:00AM	002-01	141																																	
5	2012/11/11	11:00AM	002-01	141																																	
6	2012/11/11	11:00AM	002-01	141																																	

Error diagnosis by Service Tool


Connection to Service Tool

- Detail operation status and recent error history can be checked and analyzed by using the Service Tool.
- Last 5 min. operation memory can also be recorded.

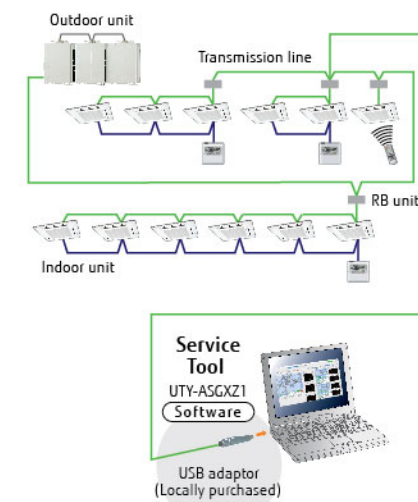

Remote monitoring

The Web Monitoring system allows you to view system operation anytime over the internet, ensuring issue free operation. The operating VRF network system in the building can be monitored real time over the Internet.

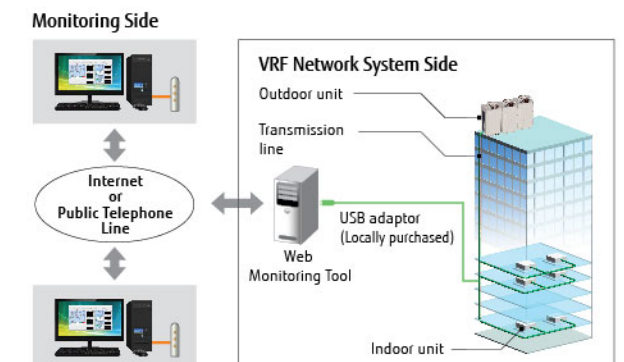

AIRSTAGE
INVERTER

AIRSTAGE™ SERIES

The AIRSTAGE 3 Series has a total of 99 Indoor models to meet the environmental and building size requirements.

The AIRSTAGE series outdoor units were developed with structural designs and advanced inverter technology to provide higher efficiency. High durability technology has also been incorporated to ensure long-term use.

HEAT PUMP TYPE AIRSTAGE J-IVL

HEAT PUMP TYPE AIRSTAGE J-IVS

HEAT PUMP TYPE AIRSTAGE V-III TROPICAL Series



AIRSTAGE™


Heat Pump

for Small Capacity Type

AIRSTAGE™ J-IVL


System configuration example

- This system is used for small and medium-sized buildings. 1 refrigerant system is used for each outdoor unit.
- Connection of multiple indoor units using separation tubes and headers.

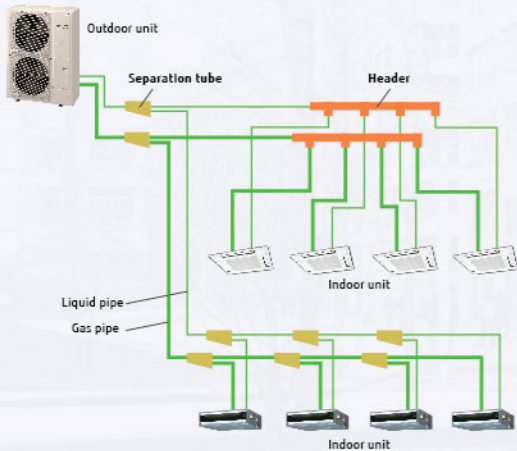

New intelligent refrigerant control

Fujitsu general proposes New outdoor unit which includes New refrigerant control. New refrigerant control can be operated with suitable control corresponding to heat load of the room and can offer a more comfortable space. New refrigerant control can also provide more energy savings.

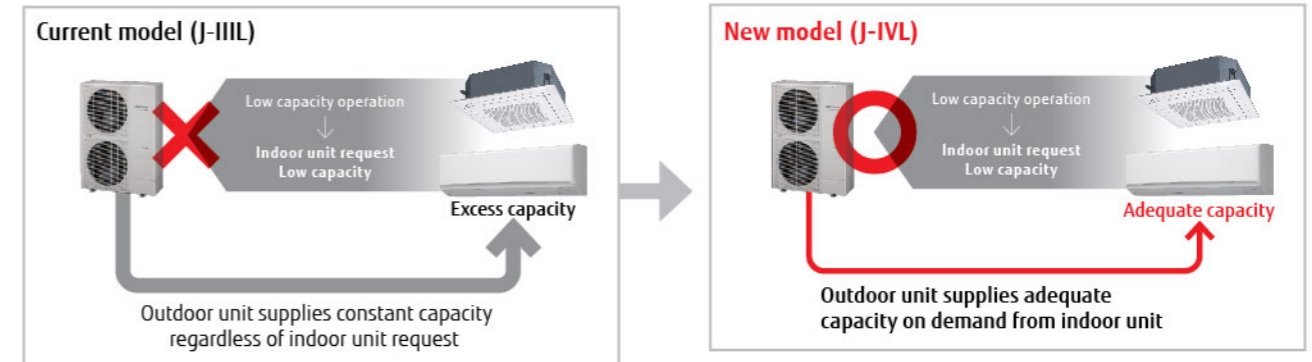

* The improvement by the control and the actual sine wave varies by the combination of the indoor unit and system operating condition.

External static pressure

External static pressure is available up to 60Pa for 14/16/18HP. (30Pa for 8/10HP, 40Pa for 12HP)

* Capacities are slightly decreased for rated values during high static pressure operation.



Advanced high efficiency technology

Ø570 mm Large propeller fan
The high efficiency and the low sound operation are mutually realized by reduction of a draft loss which are enabled by the Fujitsu General's original blade design and a large diameter propeller fan.

DC fan motor
Miniaturized, low noise, high efficiency, multi-stage DC fan motor is mounted.

Large heat exchanger
Heat exchange performance is substantially improved by mounting of 2.6-row large heat exchanger.

DC inverter control
Efficiency is improved by mounting of new active filter module.

Subcool heat exchanger
Cooling performance is improved by mounting of dual tube heat exchanger.

Scroll compressor
The equipment of scroll compressor with a wide range of rotational frequency from 15 to 130 rps together with Fujitsu General's unique sensorless sine wave control method which smoothly control the input power run into the motor realized a mutual improvement on the energy efficient operation and the low sound operation.

15-130 rps



Fujitsu General provides perfect total air conditioning systems that take into account energy saving, low noise, comfortable airflow, small room application and centralized control for small-sized office buildings with many small rooms.


AIRSTAGE™ J-IVL

Image: 8/10/12 HP models

Slim & Compact Design




Various Installation

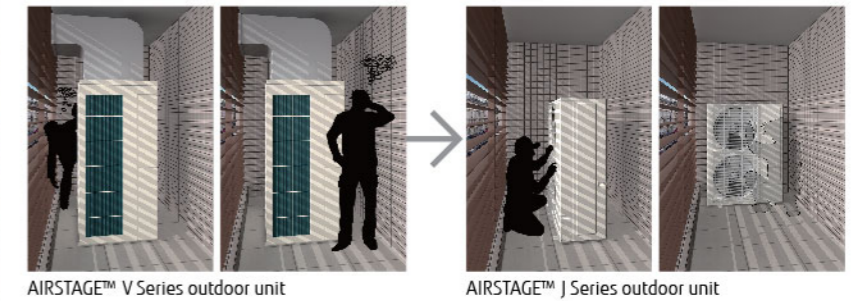

In house installation

Low noise in consideration for the nearby residents


This model is front air discharge type and about 1000 mm wide, so flexible installation is possible even at narrow in house space.

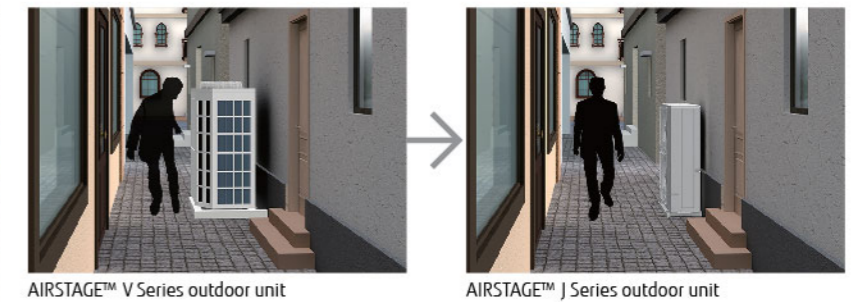

Narrow space behind building

Space saving

Due to compact and thin model, direct ground installation or wall mounted installation is possible even at narrow off-street.

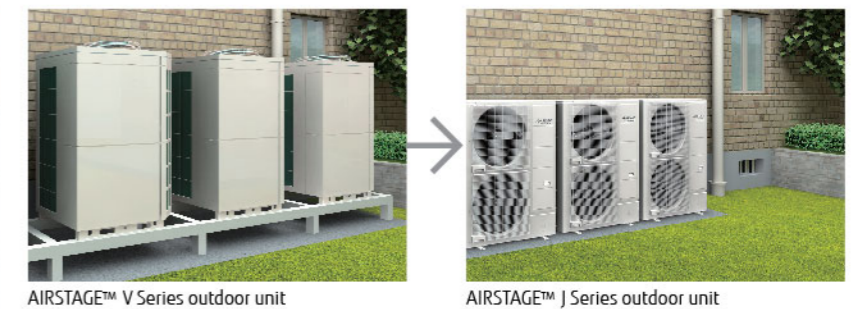


Installation at back street of building

Flexible installation

This model is front air discharge type and slim & low body, so installation space is compact. Building windows are not blocked and space saving multiple units installation is possible.


Efficiency in actual operation

Top class high EER/COP(Max. Heating) is achieved for all models by large heat exchanger, high efficient Scroll compressor, and our own technologies.

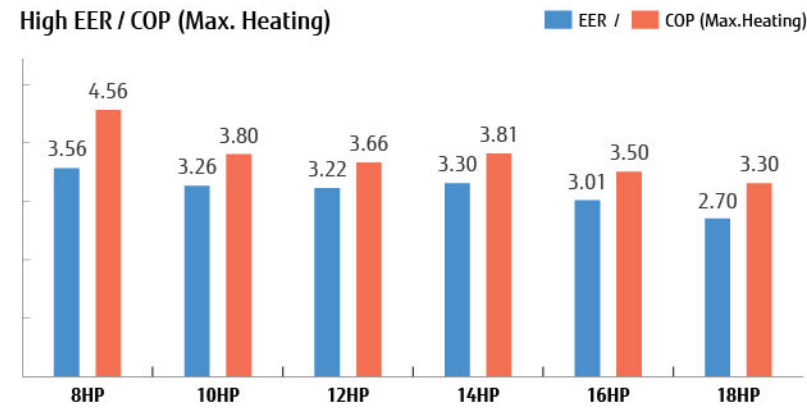

Long piping length

Our advanced refrigerant control technology allows us to achieve a total refrigerant piping length of 400 m. This opens up new possibilities in system design.

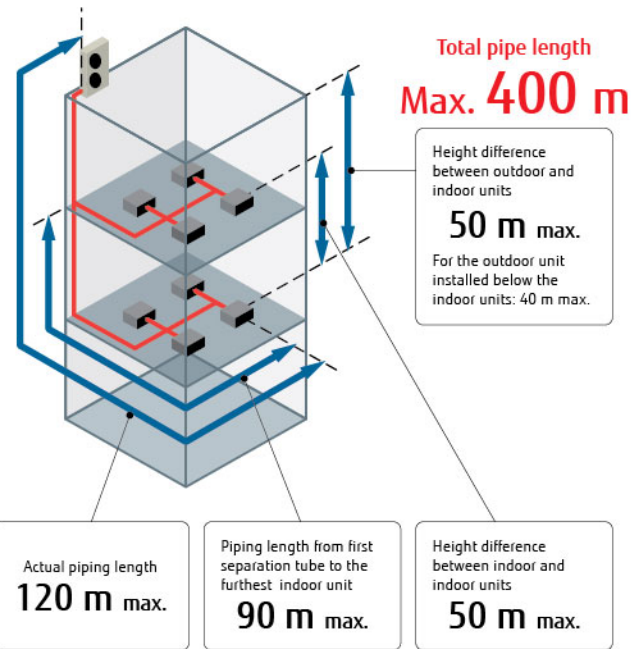


Up to 42 indoor units* can be connected

The combination of the smallest but adequate capacity indoor unit and a new outdoor unit with the optimum heat exchanger structure has realized the industry's top class connection of 42 units. *: 18 HP model



Top Class Low Operating Sound

Top class low operating sound is achieved. Highly suited for densely populated areas thanks to their low operating sound.

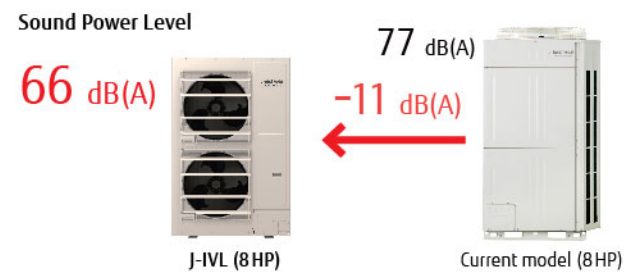

8,10,12 HP: AJH072LELBH / AJH090LELBH / AJH108LELBH
 14,16,18 HP: AJH126LELBH / AJH144LELBH / AJH162LELBH



Specifications

Rating Capacity range	HP	8	10	12	14	16	18
Model name		AJH072LELBH	AJH090LELBH	AJH108LELBH	AJH126LELBH	AJH144LELBH	AJH162LELBH
Maximum Connectable Indoor Unit		1-20	1-25	1-30	1-36	1-40	1-42
Power source		3 phase, ~400V, 50Hz					
Capacity	Cooling	22.4	28.0	33.5	40.0	45.0	50.0
	Nominal Heating	22.4	28.0	33.5	40.0	45.0	50.0
	Max Heating	25.0	31.5	37.5	45.0	50.0	55.0
Airflow rate		8,400	9,000	11,000/12,100	13,000	14,000	14,800/15,300
Sound pressure level / Power level	Cooling	52/66	54/69	59/73	62/75	64/77	65/79
	Heating	54/-	57/-	62/-	63/-	65/-	68/-
	Height	1,428	1,428	1,428	1,638	1,638	1,638
Net Dimensions	Width	1,080	1,080	1,080	1,080	1,080	1,080
	Depth	480	480	480	480	480	480
	Weight	170	177	178	213	213	217
Refrigerant	Type (Global Warming Potential)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	7.0 (14.6)	7.5 (15.7)	7.5 (15.7)	11.0 (22.9)	11.0 (22.9)	11.8 (24.6)
Connection pipe diameter	Liquid	9.52	9.52	12.70	12.70	12.70	12.70
	Gas	19.05	22.20	28.58	28.58	28.58	28.58
Total pipe length		400	400	400	400	400	400
Max. height difference		50/40 (Outdoor unit: Upper/Lower)					
Operation range	Cooling	-15 to 46	-15 to 46	-15 to 46	-5 to 46*	-5 to 46*	-5 to 46*
	Heating	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.


Heating: Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

* The cooling operation range of -15 to 46°C is allowed only when all of the indoor units connected to the system are higher than capacity of 5.6kW.

Dimensions

(Unit : mm)

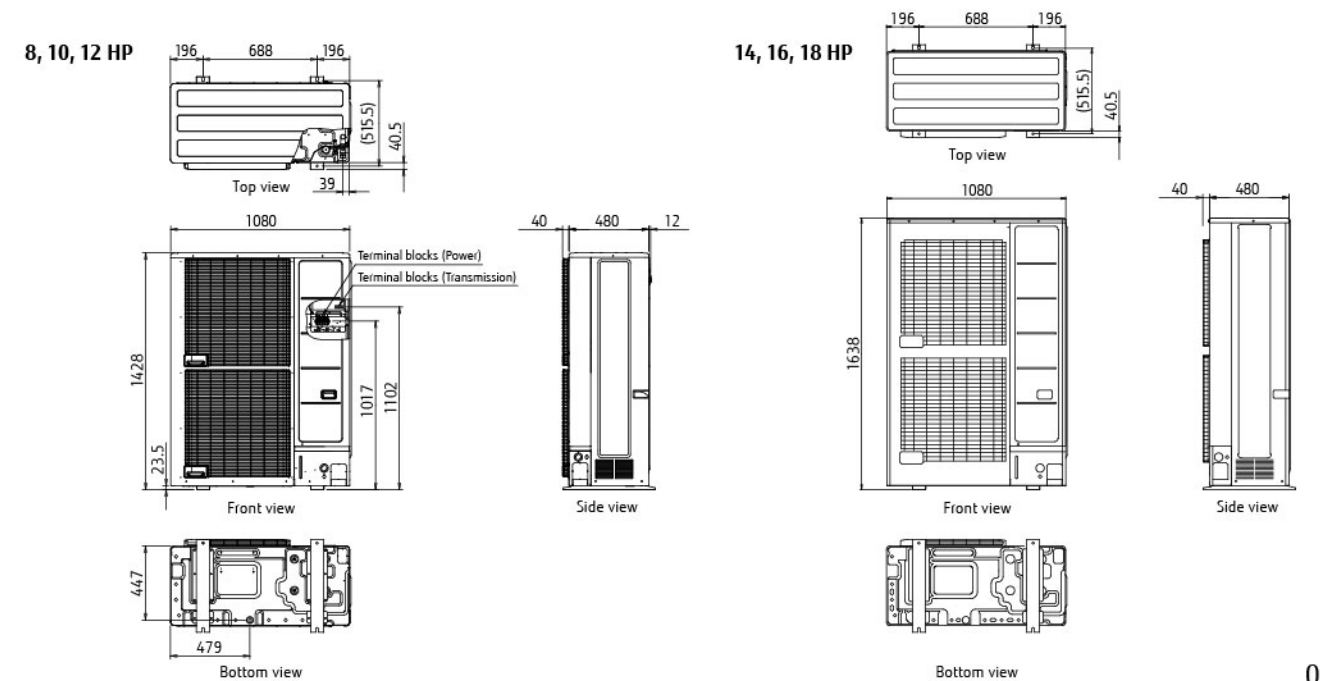


Heat Pump

for Small Capacity Type




System configuration example

- This system is used for small and medium-sized buildings. 1 refrigerant system is used for each outdoor unit.
- Connection of multiple indoor units using separation tubes and headers.

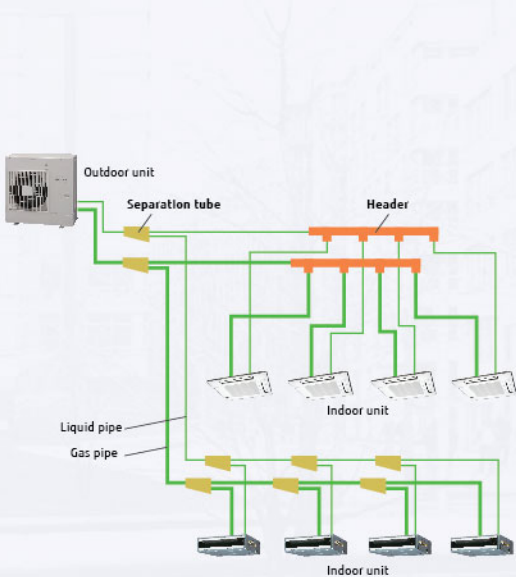

New intelligent refrigerant control

Fujitsu general proposes New outdoor unit which includes New refrigerant control. New refrigerant control can be operated with suitable control corresponding to heat load of the room and can offer a more comfortable space. New refrigerant control can also provide more energy savings.

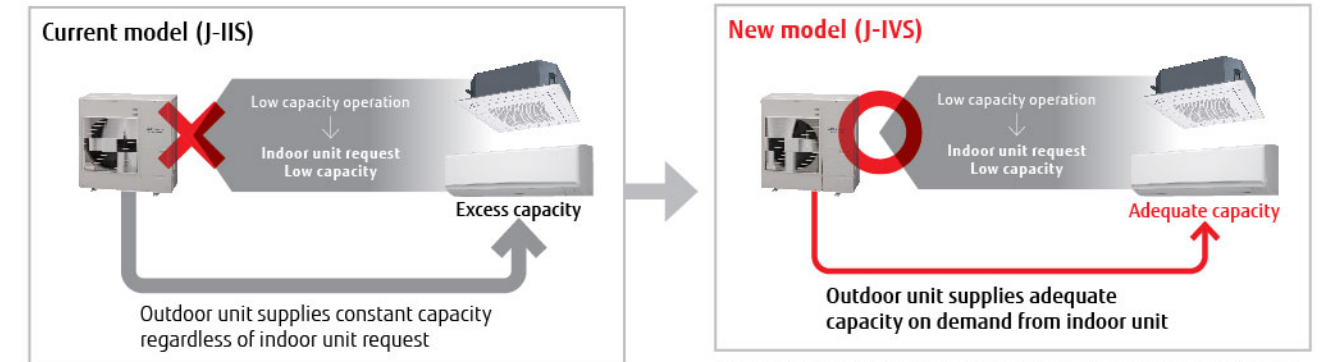

* The improvement by the control and the actual sine wave varies by the combination of the indoor unit and system operating condition.

External static pressure

External static pressure is available up to 25Pa for 4/5/6HP.



Advanced high efficiency technology

Large propeller fan
High performance and low noise realized by large propeller and optimization of angle.

DC fan motor
Miniaturized, low noise, high efficiency, multi-stage DC fan motor is mounted.

DC inverter control
Efficiency is improved by mounting of new active filter module.

Large heat exchanger
Heat exchange performance is substantially improved by mounting of 3-row large heat exchanger.

Smooth airflow grille
This grille was aerodynamically designed for good efficiency with little blow loss.

Compact and high performance DC twin rotary compressor
Efficiency in all load regions is good. Especially good performance from low to medium at normal operation.

High heat transfer copper tube (Improved lead angle)

HEAT PUMP TYPE




TROPICAL Series

Fujitsu General tropical VRF is designed for tropical weather. Extensive lineup from 8HP to 54HP in 2HP increment. Connectable indoor unit capacity ratio up to 150%

System Outline


High ambient operation design

Possible to operate cooling up to 52°C outdoor temperature

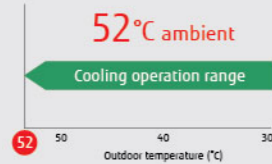

Powerful cooling capacity design

Keeping high cooling power at even high ambient temperature

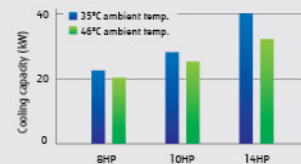


Anti-corrosion treatment design

All metallic and PCB components are protected against corrosion



System configuration example

- This system is used for medium-sized and large buildings. Connecting each outdoor unit makes it possible to create a high-capacity system.
- Connection of multiple indoor units using separation tubes and headers.

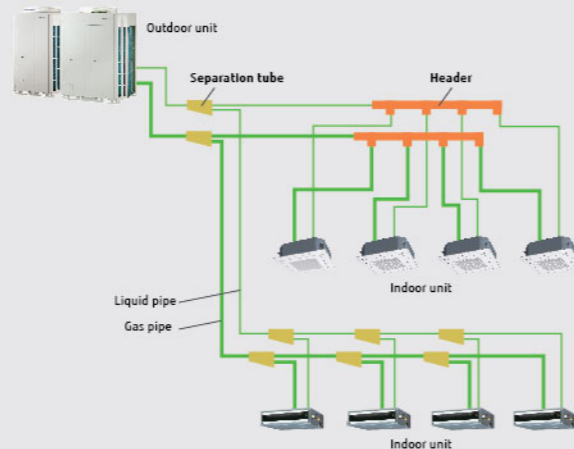


Features



Energy efficiency

Top class high COP is realized for all combinations by our unique heat exchanger structure, high efficient DC twin compressor, and other our own technologies.

Space saving combination

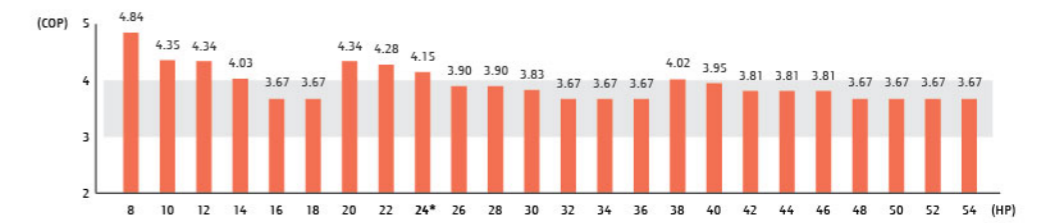

Energy efficiency combination

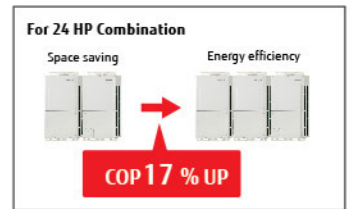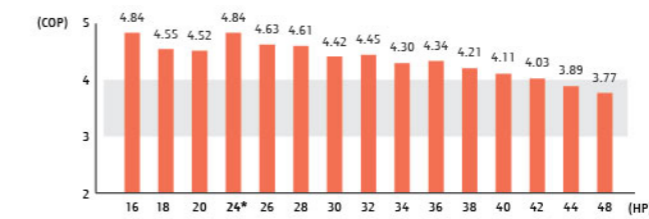

Energy saving technology that boosted operation efficiency



Powerful large propeller fan

By using CFD*1 technology, a newly designed fan achieves high performance and low noise operation.
*1. CFD - Computational Fluid Dynamics

All Inverter



3 phase DC fan motor

Efficiency is substantially improved by high efficient motor with sophisticated driver control. In addition, low noise is realized by DC fan motor.




Sine-wave DC inverter control

High efficiency is realized by adoption of reduced switching loss IPM.



High efficient & Large capacity DC inverter compressor

Large capacity high efficient DC twin rotary compressor with 0.1Hz steps compressor speed control



Subcool heat exchanger

High Heat Exchange efficiency is achieved by using an internal projection shape double pipe construction.



4-face heat exchanger


Heat exchange efficiency is significantly improved by the introduction of a new 4-face heat exchanger that increases effective surface area.

Front intake port (corner cut air inhaling structure)

Advanced energy saving control


Multiple outdoor operation control

This control method operates all compressors at part load and distributes refrigerant to all heat exchangers to improve the overall system efficiency.

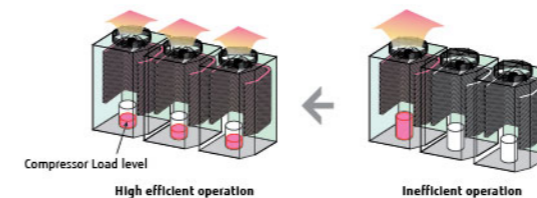

Heat exchanger refrigerant control

The efficiency of the top and bottom heat exchanger in the outdoor unit has been improved by adopting an optimum refrigerant path control.

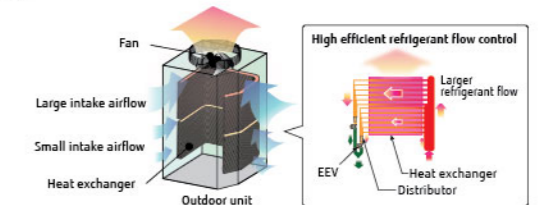


















Outdoor units lineup

• Combinations other than the followings are not recommended.

Space saving combination

72,000Btu/h (8HP)  AJH072LNTCH UNIT : AJH072LNTCH	90,000Btu/h (10HP)  AJH090LNTCH UNIT : AJH090LNTCH	108,000Btu/h (12HP)  AJH108LNTCH UNIT : AJH108LNTCH	126,000Btu/h (14HP)  AJH126LNTCH UNIT : AJH126LNTCH	144,000Btu/h (16HP)  AJH144LNTCH UNIT : AJH144LNTCH
162,000Btu/h (18HP)  AJH162LNTCH UNIT : AJH162LNTCH	180,000Btu/h (20HP)  AJH180LNTCH UNIT : AJH090/090LNTCH	198,000Btu/h (22HP)  AJH198LNTCH UNIT : AJH126/072LNTCH	216,000Btu/h (24HP)  AJH216LNTCH UNIT : AJH126/090LNTCH	234,000Btu/h (26HP)  AJH234LNTCH UNIT : AJH144/090LNTCH
252,000Btu/h (28HP)  AJH252LNTCH UNIT : AJH162/090LNTCH	270,000Btu/h (30HP)  AJH270LNTCH UNIT : AJH144/126LNTCH	288,000Btu/h (32HP)  AJH288LNTCH UNIT : AJH144/144LNTCH	306,000Btu/h (34HP)  AJH306LNTCH UNIT : AJH162/144LNTCH	324,000Btu/h (36HP)  AJH324LNTCH UNIT : AJH162/162LNTCH
342,000Btu/h (38HP)  AJH342LNTCH UNIT : AJH162/090/090LNTCH	360,000Btu/h (40HP)  AJH360LNTCH UNIT : AJH144/126/090LNTCH	378,000Btu/h (42HP)  AJH378LNTCH UNIT : AJH144/144/090LNTCH	396,000Btu/h (44HP)  AJH396LNTCH UNIT : AJH162/144/090LNTCH	414,000Btu/h (46HP)  AJH414LNTCH UNIT : AJH162/162/090LNTCH
432,000Btu/h (48HP)  AJH432LNTCH UNIT : AJH144/144/144LNTCH	450,000Btu/h (50HP)  AJH450LNTCH UNIT : AJH162/144/144LNTCH	468,000Btu/h (52HP)  AJH468LNTCH UNIT : AJH162/162/144LNTCH	486,000Btu/h (54HP)  AJH486LNTCH UNIT : AJH162/162/162LNTCH	

Energy efficiency combination


144,000Btu/h (16HP)  AJH144LNTCHH UNIT : AJH072/072LNTCH	162,000Btu/h (18HP)  AJH162LNTCHH UNIT : AJH090/072LNTCH	180,000Btu/h (20HP)  AJH180LNTCHH UNIT : AJH108/072LNTCH	216,000Btu/h (24HP)  AJH216LNTCHH UNIT : AJH072/072/072LNTCH	234,000Btu/h (26HP)  AJH234LNTCHH UNIT : AJH090/072/072LNTCH
252,000Btu/h (28HP)  AJH252LNTCHH UNIT : AJH108/072/072LNTCH	270,000Btu/h (30HP)  AJH270LNTCHH UNIT : AJH126/072/072LNTCH	288,000Btu/h (32HP)  AJH288LNTCHH UNIT : AJH108/108/072LNTCH	306,000Btu/h (34HP)  AJH306LNTCHH UNIT : AJH126/108/072LNTCH	324,000Btu/h (36HP)  AJH324LNTCHH UNIT : AJH108/108/108LNTCH
342,000Btu/h (38HP)  AJH342LNTCHH UNIT : AJH126/108/108LNTCH	360,000Btu/h (40HP)  AJH360LNTCHH UNIT : AJH126/126/108LNTCH	378,000Btu/h (42HP)  AJH378LNTCHH UNIT : AJH126/126/126LNTCH	396,000Btu/h (44HP)  AJH396LNTCHH UNIT : AJH144/126/126LNTCH	414,000Btu/h (46HP)  AJH414LNTCHH UNIT : AJH144/144/126LNTCH

AJH__LNTCH(H) : AJH__LNTCH(H), AJH__LNLBH(H)

Dimensions



8,10HP : AJH072LNTCH / AJH090LNTCH

(Unit : mm)

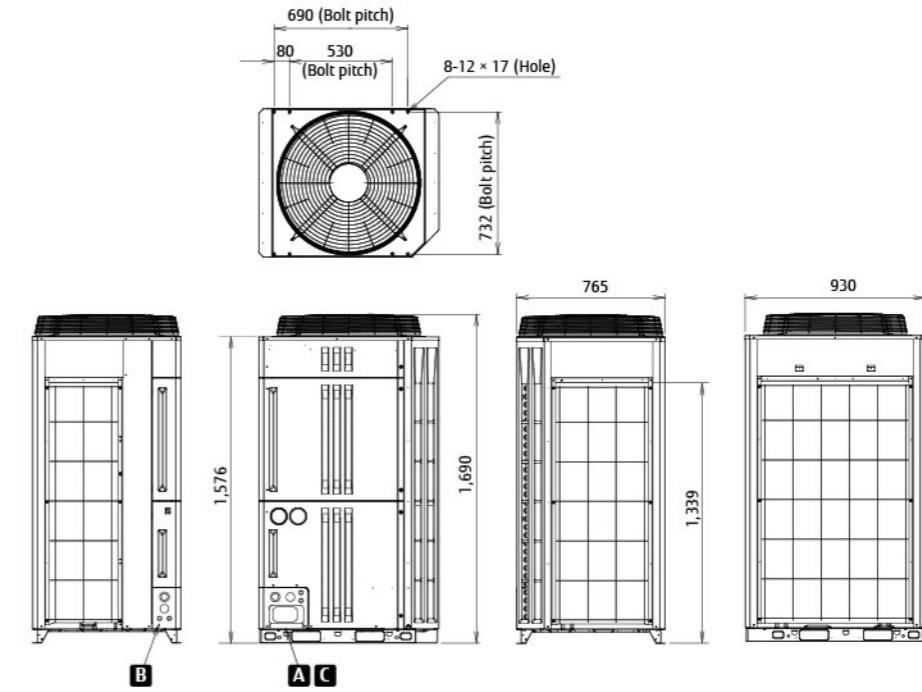

12,14,16,18HP : AJH108LNTCH / AJH126LNTCH / AJH144LNTCH / AJH162LNTCH

(Unit : mm)

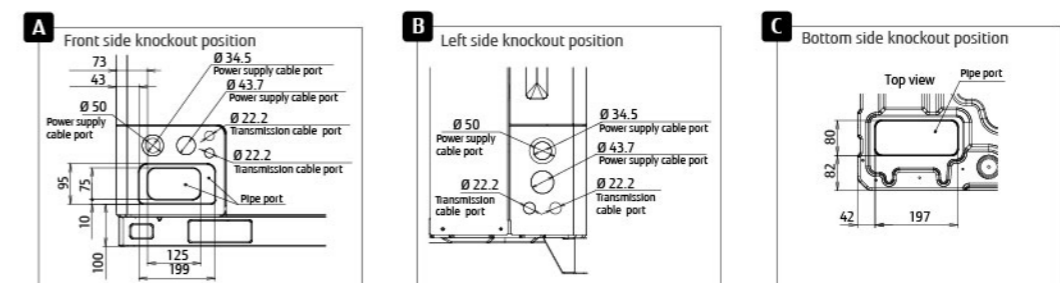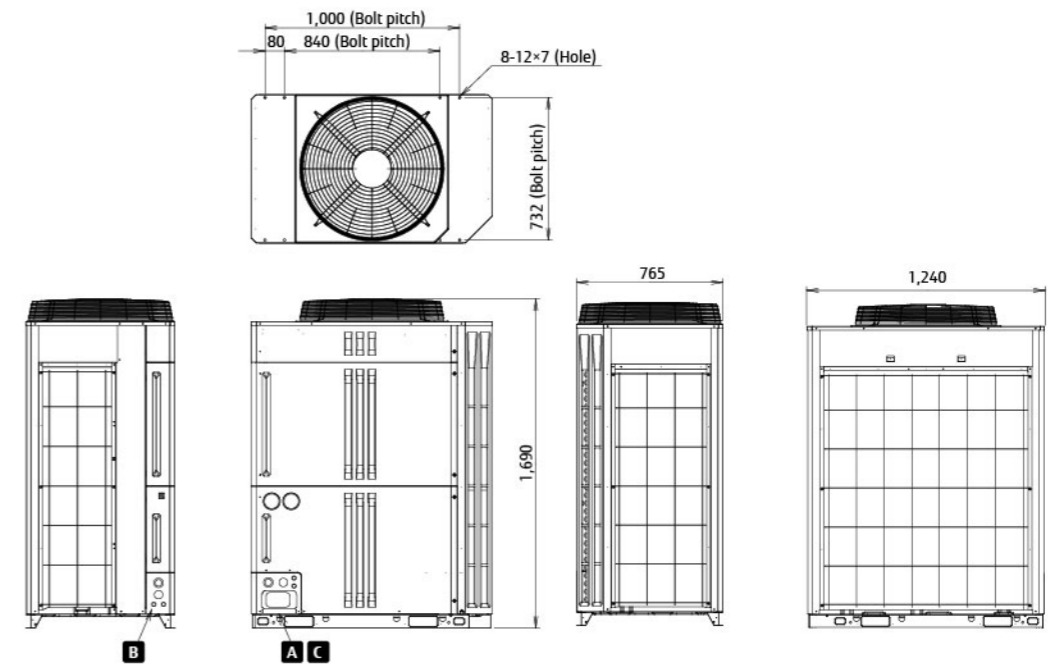

Outdoor units specifications

Space Saving Combination

Rating Capacity range	HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54
Set Model name		AJH072LNTCH	AJH090LNTCH	AJH108LNTCH	AJH126LNTCH	AJH144LNTCH	AJH162LNTCH	AJH180LNTCH	AJH198LNTCH	AJH216LNTCH	AJH234LNTCH	AJH252LNTCH	AJH270LNTCH	AJH288LNTCH	AJH306LNTCH	AJH324LNTCH	AJH342LNTCH	AJH360LNTCH	AJH378LNTCH	AJH396LNTCH	AJH414LNTCH	AJH432LNTCH	AJH450LNTCH	AJH468LNTCH	AJH486LNTCH
Unit 1								AJH090LNTCH	AJH126LNTCH	AJH162LNTCH	AJH144LNTCH	AJH162LNTCH	AJH144LNTCH	AJH126LNTCH	AJH162LNTCH	AJH162LNTCH	AJH162LNTCH	AJH144LNTCH	AJH144LNTCH	AJH162LNTCH	AJH162LNTCH	AJH144LNTCH	AJH162LNTCH	AJH162LNTCH	AJH162LNTCH
Unit 2								AJH090LNTCH	AJH072LNTCH	AJH090LNTCH	AJH090LNTCH	AJH090LNTCH	AJH144LNTCH	AJH144LNTCH	AJH144LNTCH	AJH144LNTCH	AJH090LNTCH	AJH126LNTCH	AJH144LNTCH	AJH144LNTCH	AJH162LNTCH	AJH162LNTCH	AJH144LNTCH	AJH144LNTCH	AJH162LNTCH
Unit 3																	AJH090LNTCH	AJH090LNTCH	AJH090LNTCH	AJH090LNTCH	AJH144LNTCH	AJH144LNTCH	AJH144LNTCH	AJH144LNTCH	AJH162LNTCH
Maximum Connectable Indoor Unit*1		13	16	19	23	26	29	33	36	40	43	46	50	53	55	55	55	55	55	55	55	55	55	55	55
Indoor unit connectable capacity	Cooling	kW												kW											
Power source		3-phase 4 wire, 400 V, 50Hz												3 phase 4 wire, 400 V, 50Hz											
Capacity	Cooling	kW												kW											
Capacity	Heating	kW												kW											
Airflow rate	High	m³/h												m³/h											
Sound pressure level*2	Cooling	dB(A)												dB(A)											
Sound pressure level*2	Heating	dB(A)												dB(A)											
Maximum external static pressure		Pa												Pa											
Refrigerant type		R410A												R410A											
Heat exchanger fin		Blue Fin												Blue Fin											
Dimensions	Height	mm												mm											
Dimensions	Width	mm												mm											
Dimensions	Depth	mm												mm											
Weight		kg												kg											
Refrigerant Charge		kg												kg											
Connection pipe diameter	Liquid	mm												mm											
Connection pipe diameter	Gas	mm												mm											
Operation range	Cooling	°C												°C											
Operation range	Heating	°C												°C											
Compressor motor output		kW												kW											

Energy Efficiency Combination

Rating Capacity range	HP	16	18	20	24	26	28	30	32	34	36	38	40	42	44	46	
Set Model name		AJH144LNTCHH	AJH162LNTCHH	AJH180LNTCHH	AJH216LNTCHH	AJH234LNTCHH	AJH252LNTCHH	AJH270LNTCHH	AJH288LNTCHH	AJH306LNTCHH	AJH324LNTCHH	AJH342LNTCHH	AJH360LNTCHH	AJH378LNTCHH	AJH396LNTCHH	AJH414LNTCHH	
Unit 1		AJH072LNTCH	AJH090LNTCH	AJH108LNTCH	AJH072LNTCH	AJH090LNTCH	AJH108LNTCH	AJH126LNTCH	AJH108LNTCH	AJH126LNTCH	AJH108LNTCH	AJH126LNTCH	AJH126LNTCH	AJH126LNTCH	AJH144LNTCH	AJH144LNTCH	
Unit 2		AJH072LNTCH	AJH072LNTCH	AJH072LNTCH	AJH072LNTCH	AJH072LNTCH	AJH072LNTCH	AJH072LNTCH	AJH08LNTCH	AJH108LNTCH	AJH108LNTCH	AJH108LNTCH	AJH108LNTCH	AJH126LNTCH	AJH126LNTCH	AJH126LNTCH	
Unit 3																	
Maximum Connectable Indoor Unit*1		26	29	33	39	43	46	50	52	55	55	55	55	55	55		
Indoor unit connectable capacity		kW															
Power source		3-phase 4 wire, 400 V, 50Hz															
Capacity	Cooling	kW															
Capacity	Heating	kW															
Airflow rate	High	m³/h															
Sound pressure level*2	Cooling	dB(A)															
Sound pressure level*2	Heating	dB(A)															
Maximum external static pressure		Pa															
Refrigerant Type		R410A															
Heat exchanger fin		Blue Fin															
Dimensions	Height	mm															
Dimensions	Width	mm															
Dimensions	Depth	mm															
Weight		kg															
Refrigerant Charge		kg															
Connection pipe diameter	Liquid	mm															
Connection pipe diameter	Gas	mm															
Operation range	Cooling	°C															
Operation range	Heating	°C															
Compressor motor output		kW															

Note : Specifications are based on the following conditions.
 Cooling : Indoor temperature of 27°C DB / 19°CDB, and outdoor temperature of 35°CDB / 24°CDB.
 Heating : Indoor temperature of 20°CDB / 15°CDB, and outdoor temperature of 7°CDB / 6°CDB.
 Pipe length : 7.5m Height difference between outdoor unit and indoor unit : 0 m.
 # Indoor units connectivity of 150% allowed only if the ambient temperature is below 46°C, for higher temperatures only 130% diversity is allowed.

VRF INDOOR UNITS



















19 types and 99 models available to meet the requirements of any building design.

The AIRSTAGE™ indoor units were developed to be highly efficient, compact, low noise and to have user friendly operation. With a variety of indoor units and capacities available, Fujitsu General has an indoor unit to match any requirement which is easy to install and maintain. Further, a variety of options are available to achieve an air conditioning environment that is more desirable from the user's perspective.

- Vn-060 INDOOR UNITS LINE-UP
- Vn-062 1-Way Flow Cassette
- Vn-064 3D Flow Cassette
- Vn-066 Compact Cassette (Grid type / Standard type)
- Vn-068 Cassette Slim type (Circular Flow / 4-way Flow)
- Vn-072 Cassette Large type (Circular Flow / 4-way Flow)
- Vn-076 Low Static Pressure Duct / Slim Duct / Slim Concealed Floor
- Vn-078 Low Static Pressure Duct / Concealed Floor
- Vn-080 Low Static Pressure Duct
- Vn-082 Medium Static Pressure Duct
- Vn-084 High Static Pressure Duct
- Vn-086 Compact Floor
- Vn-088 Floor / Ceiling
- Vn-090 Ceiling
- Vn-092 Wall Mounted (EEV Internal / external)



VRF Indoor Unit Lineup

Capacity range (kW)			1.1	2.2	2.8	3.6		4.0	4.5	5.6	7.1	9.0	10.0	11.2	12.5	14.0	18.0	22.4	25.0		
Class			4	7	9	12		14	14	18	24	30	34	36	45	54	60	72	90		
Cassette	Compact type	Compact Grid type / Standard type		AUXB 004 GLEH	AUXB 007 GLEH	AUXB 009 GLEH	AUXB 012 GLEH		AUXB 014 GLEH	AUXB 018 GLEH	AUXB 024 GLEH										
	Slim type	Circular Flow				AUXN 009 GLAH***5	AUXN 012 GLAH***5		AUXN 014 GLAH***5	AUXM 018 GLEH	AUXM 024 GLEH	AUXM 030 GLEH									
		4-way Flow								AUXD 18 GALH	AUXD 24 GALH										
	Large type	Circular Flow								AUXK 018 GLEH	AUXK 024 GLEH	AUXK 030 GLEH	AUXK 034 GLEH	AUXK 036 GLEH	AUXK 045 GLEH	AUXK 054 GLEH					
		4-way Flow								AUXA 18 GALH*2	AUXA 24 GALH*2	AUXA 30 GALH	AUXA 34 GALH	AUXA 36 GALH	AUXA 45 GALH	AUXA 54 GALH					
	One-way Flow type	One-way Flow		AUXV 004 GLEH	AUXV 007 GLEH	AUXV 009 GLEH	AUXV 012 GLEH		AUXV 014 GLEH	AUXV 018 GLEH	AUXV 024 GLEH										
	3D Flow type	3D Flow							AUXS 018 GLEH	AUXS 024 GLEH											
Duct	Low Static Pressure Duct	Slim Duct (With drain pump)		ARXD 04 GALH*3	ARXD 007 GLEH	ARXD 009 GLEH	ARXD 012 GLEH		ARXD 014 GLEH	ARXD 018 GLEH	ARXD 024 GLEH										
		Low Static Pressure Duct			ARXB 07 GALH	ARXB 09 GALH	ARXB 012 GALH		ARXB 14 GALH	ARXB 18 GALH	ARXB 24 GALH	ARXB 30 GALH		ARXB 36 GALH	ARXB 45 GALH						
		Medium Static Pressure Duct									ARXA 24 GBTH	ARXA 30 GBTH		ARXA 36 GBTH	ARXA 45 GBTH						
		High Static Pressure Duct													ARXC 36 GTEH	ARXC 45 GATH		ARXC 60 GATH*1	ARXC 72 GATH*1	ARXC 90 GATH*1	
Floor	Floor (*Same as Ceiling models)					ABHA 012 GTEH		ABHA 014 GTEH	ABHA 018 GTEH	ABHA 024 GTEH											
	Slim Concealed Floor (*Same as Slim Duct models)		ARXD 04 GALH*3	ARXD 007 GLEH	ARXD 009 GLEH	ARXD 012 GLEH		ARXD 014 GLEH	ARXD 018 GLEH	ARXD 024 GLEH											
	Compact Floor		AGHA 004 GCGH	AGHA 007 GCGH	AGHA 009 GCGH	AGHA 012 GCGH		AGHA 014 GCGH													
	Compact Floor (EEV external)		AGHE 004 GCEH	AGHE 007 GCEH	AGHE 009 GCEH	AGHE 012 GCEH		AGHE 014 GCEH													
Ceiling						ABHA 012 GTEH		ABHA 014 GTEH	ABHA 018 GTEH	ABHA 024 GTEH	ABHA 030 GTEH		ABHA 036 GTEH	ABHA 045 GTEH	ABHA 054 GTEH						
Wall Mounted	Wall Mounted		ASHA 004 GCGH	ASHA 007 GCGH	ASHA 009 GCGH	ASHA 012 GCGH		ASHA 014 GCGH		ASHA 18 GBCH	ASHA 24 GBCH	ASHA 030 GTEH	ASHA 034 GTEH								
	Wall Mounted (EEV external)		ASHE 004 GCEH	ASHE 007 GCEH	ASHE 009 GCEH	ASHE 012 GCEH		ASHE 014 GCEH													

*1: ARXC60/72/90G cannot be connected to J-IV Series.
 *2: AUXA18/24GALH can be connected to V-III Tropical Series only.
 *3: ARXD04GALH cannot be connected to J-IVS/J-IVL.
 *4: AUXN009/012/014GALH can be connected to J-IVS Series only.
 *5: Production by order
 Specifications and design are subject to change without notice.

NEW

Cassette


One-way Flow type



Compact chassis size

Their compact sizes make it easy to install them in a variety of commercial locations and environments.


- The chassis is less than 200 mm high in every model.
- All 4 to 12kbtu models are less than 1,000 mm wide.
- The chassis depth is 570 mm, which fits nicely into a grid-type ceiling.

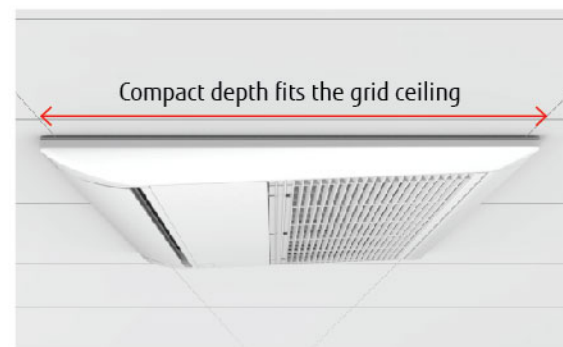

Dimensions (Panel size)		(Unit : mm)						
		4	7	9	12	14	18	24
H			198 (43)				198 (43)	
W		785 (950)					1,190 (1,360)	
D			570 (620)				570 (620)	

Wide airflow range

The large flap with triangularly arrayed louvers has a wider movable range and directs an airflow to the furthest corners of the room.

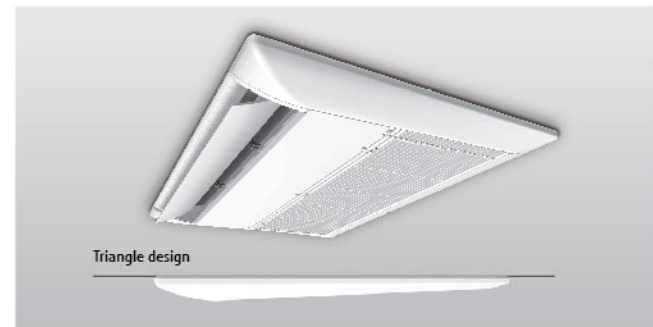


Note: This is a conceptual drawing. Air conditioning performance may vary depending on installation, room size, and the distance from the wall.

Low noise operation

They produce little noise during operation, which makes them an ideal choice for use in hotel rooms.



Model : AUXV004GLEH / AUXV007GLEH / AUXV009GLEH
 AUXV012GLEH / AUXV014GLEH / AUXV018GLEH
 AUXV024GLEH

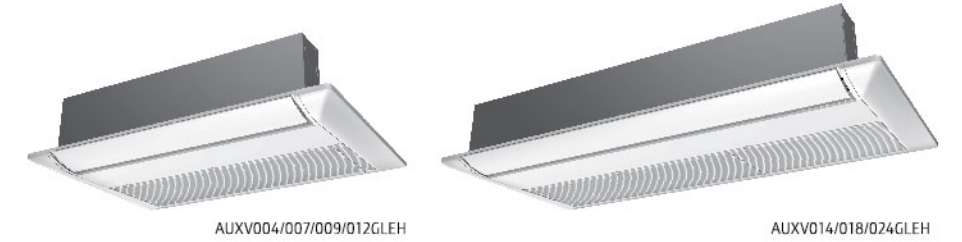

Specifications

Model name		AUXV004GLEH	AUXV007GLEH	AUXV009GLEH	AUXV012GLEH	AUXV014GLEH	AUXV018GLEH	AUXV024GLEH
Power source		Single phase, ~230V, 50Hz						
Capacity	Cooling	1.1	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	1.3	2.8	3.2	4.0	5.0	6.3	8.0
Input power		30/30	42/42	42/42	60/60	38/38	56/56	99/99
Airflow rate*	High	460	550	550	670	720	890	1,150
	Med-H	440	440	440	520	660	840	1,020
	Med	420	420	420	480	630	770	940
	Med-L	400	400	400	450	600	710	790
	Low	380	380	380	410	580	660	700
	Quiet	360	360	360	360	550	580	610
Sound pressure level*	High	38	42	42	45	37	44	49
	Med-H	37	37	37	41	36	43	47
	Med	36	36	36	39	35	40	45
	Med-L	35	35	35	38	34	38	42
	Low	33	33	33	36	33	36	39
	Quiet	32	32	32	32	32	34	36
Net Dimensions (H × W × D)		mm 198 × 785 × 570	mm 198 × 785 × 570	mm 198 × 785 × 570	mm 198 × 785 × 570	mm 198 × 1,190 × 570	mm 198 × 1,190 × 570	mm 198 × 1,190 × 570
Weight		kg(lbs) 18 (40)	kg(lbs) 19 (42)	kg(lbs) 19 (42)	kg(lbs) 19 (42)	kg(lbs) 26 (57)	kg(lbs) 26 (57)	kg(lbs) 27 (59)
Connection pipe diameter	Liquid (Flare)	mm 6.35	mm 6.35	mm 6.35	mm 6.35	mm 6.35	mm 6.35	mm 9.52
	Gas (Flare)	mm 9.52	mm 9.52	mm 9.52	mm 12.70	mm 12.70	mm 12.70	mm 15.88
Drain hose diameter (I.D./O.D.)		25/32						
Cassette Grille	Model name	UTG-UNGA-W			UTG-UNGB-W			
	Net Dimensions (H×W×D)	mm 43 × 950 × 620			mm 43 × 1,360 × 620			
	Weight	kg(lbs) 6.5 (14.5)			kg(lbs) 8.5 (18.0)			

Note : Specifications are based on the following conditions.
 Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
 Heating : Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.
 Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

- Wireless LAN Interface: UTY-TFSXZ1
- IR Receiver Unit: UTY-TRHX
- Cassette Grille: UTG-UNGA-W / UTG-UNGB-W
- External Power Supply Unit: UTZ-GXXXA



Flexible Installation

By using new L-type piping kit, more flexible installation is possible.
 Built-in drain pump as standard accessory, which enable to have maximum 700m piping height difference from the ceiling.



Dimensions

(Unit : mm)

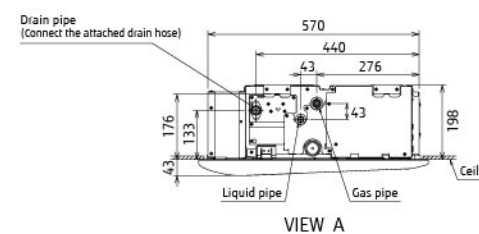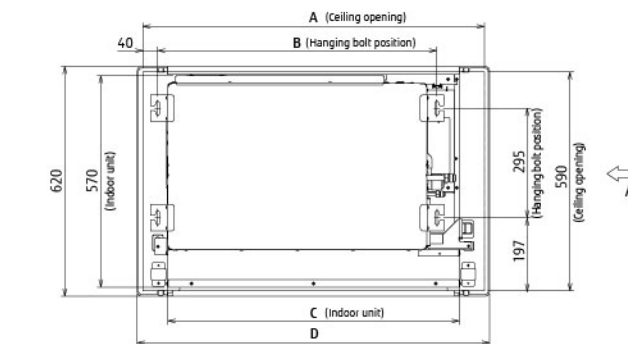

	AUXV004-012	AUXV014-024
A	920	1,330
B	752	1,152
C	785	1,190
D	950	1,360

3D Flow Cassette




3 Air Outlet Ports can be controlled individually

Using the "Comfortable airflow setting" function allows the left and right air outlet ports and the wide center air outlet ports to automatically create a comfortable space for improved comfort.

Temperature distribution during cooling and heating (when set to comfortable airflow)

Cooling: When cooling operation is stable with an outside air temperature of 35°C, a set temperature of 18°C and an air volume set to "Hi" in a 40m² environmental our test room for the AUXS024GLEH

Heating: When heating operation is stable with an outside air temperature of 7°C, a set temperature of 30°C and an air volume set to "Hi" in a 40m² environmental our test room for the AUXS024GLEH

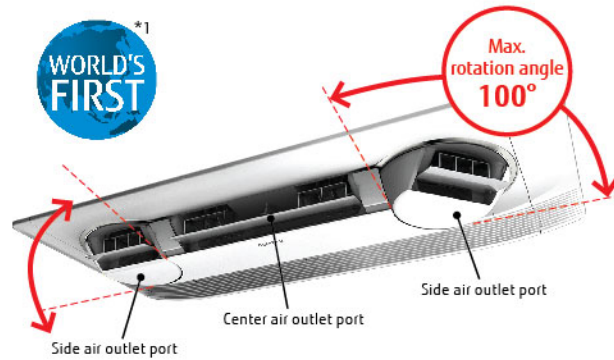

*1: Announced 2018. In room air conditioner for the home (our company's investigation)

Individual airflow setting

Equipped with an "Individual airflow setting" function that optimizes the airflow setting in accordance with the installation location.



Suitably setting the side air outlet ports to match how the space is used achieves air conditioning with no waste.


Optimum airflow control for improved comfort is achieved even for long rooms.



*Wired Remote Controller (Touch Panel) UTY-RNRYZ3 only

High Energy Saving

The "New structural design" featuring large intake and smooth output reduces air blowing loss to achieve top class energy saving.

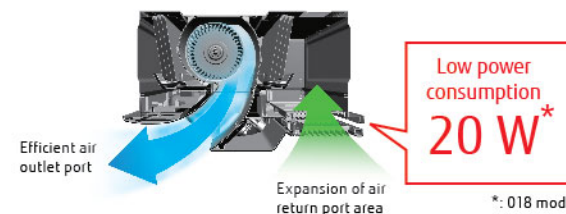

*: 018 model

Model : AUXS018GLEH / AUXS024GLEH



Specifications

Model name		AUXS018GLEH	AUXS024GLEH
Power source		Single phase, ~230V, 50Hz	
Capacity	Cooling	5.60	7.10
	Heating	6.30	8.00
Input power		20/28	34/43
Airflow rate*	High	750/870	950/1,040
	Med-H	710/830	890/990
	Med	690/780	860/930
	Med-L	660/740	810/880
	Low	630/700	770/840
	Quiet	540/540	540/540
Sound pressure level*	High	38/41	43/46
	Med-H	36/40	42/45
	Med	35/39	41/43
	Med-L	35/37	40/42
	Low	33/36	38/40
	Quiet	29/29	29/29
Net Dimensions (H × W × D)		mm 200 × 1,240 × 500	200 × 1,240 × 500
Weight		kg(lbs) 25 (55)	25 (55)
Connection pipe diameter	Liquid (Flare)	6.35	9.52
	Gas (Flare)	12.70	15.88
Drain hose diameter (I.D./O.D.)		25/32	
Cassette	Model name	UTC-USGA-W	
Grille	Net Dimensions (H×W×D)	mm 85 × 1,350 × 580	
	Weight	kg(lbs) 11.5 (25)	



Note : Specifications are based on the following conditions.
 Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
 Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
 Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].
 *: This value is "cooling operation / heating operation".

Optional parts

- Wireless LAN Interface: UTY-TFSXZ1
- IR Receiver Unit: UTY-TRHX
- Cassette Grille: UTG-USGA-W
- External Power Supply Unit: UTZ-GXXA

Dimensions

(Unit : mm)

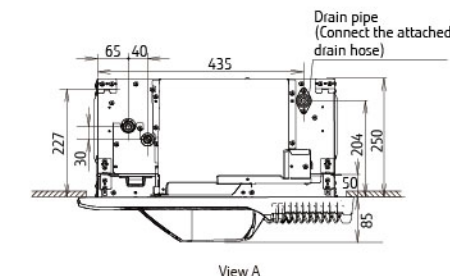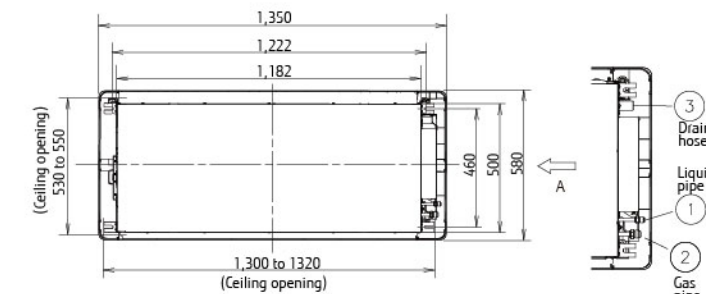


Compact Cassette

Grid type




Compact and stylish panel design

Compact and stylish panel design fits the grid type ceiling. It is a linear design suitable for grid shape of 620mm x 620mm grid ceiling.

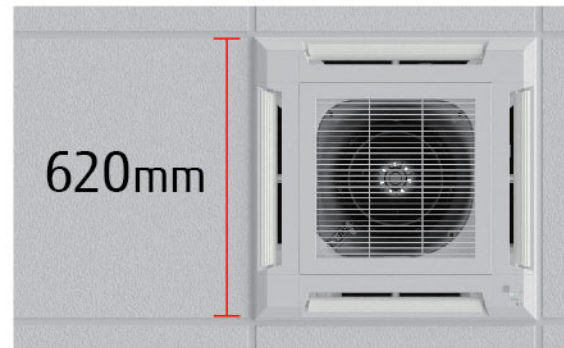


Easy maintenance

Maintenance is easier by removing the ceiling panel next to the grill, maintenance can be done, and new installation of inspection hole is unnecessary, so construction costs can be suppressed.

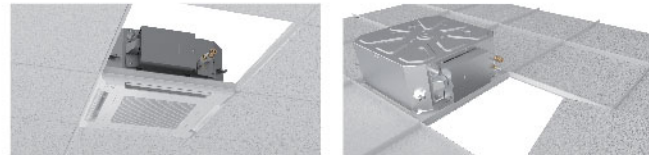

The air inlet grill can be installed in various directions, so maintenance is easy.

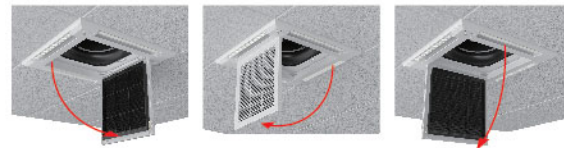

Flexible installation

It is suitable for ceiling of grid type and it has high degree of freedom of installation and it can be installed beside lighting and ventilation opening.



High ceiling mode

The compact cassette can be installed up to a height of 3.0m (012/014/018/024).

Model code	The maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
004	2.7	-
007	2.7	-
009	2.7	-
012	2.7	3.0
014	2.7	3.0
018	2.7	3.0
024	2.7	3.0

Model : AUXB004GLEH / AUXB007GLEH / AUXB009GLEH
 AUXB012GLEH / AUXB014GLEH / AUXB018GLEH
 AUXB024GLEH



Specifications

Model name		AUXB004GLEH	AUXB007GLEH	AUXB009GLEH	AUXB012GLEH	AUXB014GLEH	AUXB018GLEH	AUXB024GLEH
Power source		Single phase, ~230V, 50Hz						
Capacity	Cooling	1.1	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	1.3	2.8	3.2	4.1	5.0	6.3	8.0
Input power		23	25	25	29	35	36	84
Airflow rate	High	530/530	540	550	600	680	710	1,030
	Med-H	490/480	500	520	560	620	660	910
	Med	450/430	460	480	520	560	590	790
	Med-L	420/380	420	440	480	500	520	680
	Low	390/340	390	400	430	440	460	560
	Quiet	350/300	350	350	390	390	400	450
Sound pressure level	High	34/34	34	35	37	38	41	50
	Med-H	32/31	32	33	34	37	39	46
	Med	30/29	30	31	33	34	36	43
	Med-L	28/26	28	29	31	32	33	39
	Low	27/24	27	27	29	30	30	35
	Quiet	25/21	25	25	27	27	27	30
Net Dimensions (H x W x D)		mm 245 x 570 x 570	245 x 570 x 570	245 x 570 x 570	245 x 570 x 570	245 x 570 x 570	245 x 570 x 570	245 x 570 x 570
Weight		kg(lbs) 14.5 (32)	15 (33)	15 (33)	15 (33)	15 (33)	17 (37)	17 (37)
Connection pipe diameter	Liquid (Flare)	6.35	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)	9.52	9.52	9.52	12.70	12.70	12.70	15.88
Drain hose diameter (I.D./O.D.)		25/32						
Cassette Grille		UTG-UFGE-W / UTG-UFGE-W						
Net Dimensions (H x W x D)		mm 50 x 620 x 620 / 50 x 700 x 700						
Weight		kg(lbs) 2.3(5.1) / 2.6(6)						

Note : Specifications are based on the following conditions.
 Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
 Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
 Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].
 *1: This value is under cooling operation.


Optional parts

Air Outlet Shutter Plate: UTR-YDZB
 Flesh Air Intake Kit: UTZ-VXAA
 Insulation Kit for High Humidity: UTZ-KXGC
 Cassette Grille: UTG-UFGE-W, UTG-UFGE-W
 External Power Supply Unit: UTZ-CXXA
 Wireless LAN Interface: UTY-TFSXZ1



Dimensions

(Unit : mm)

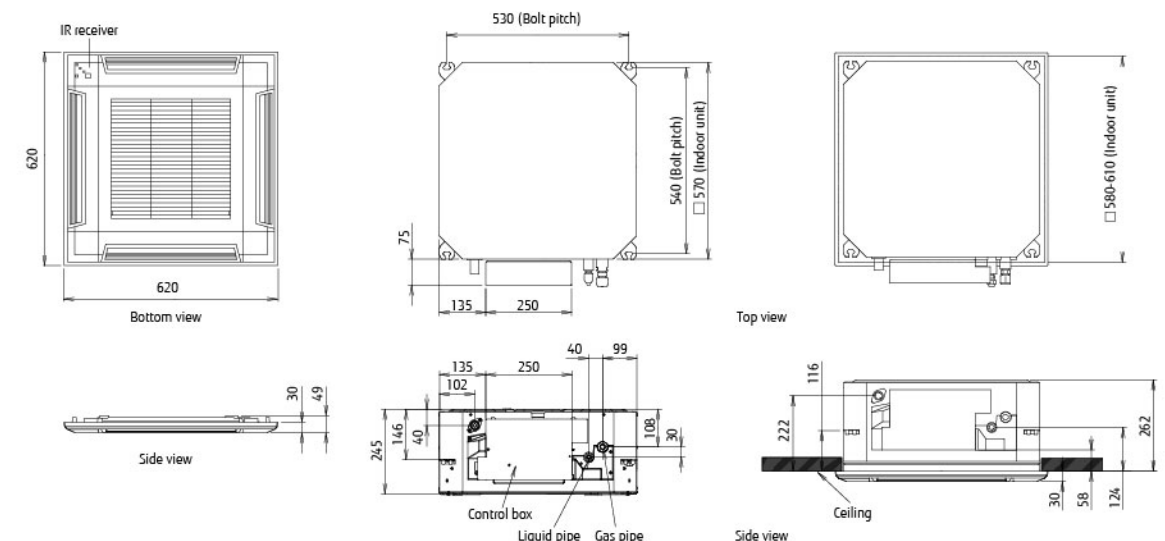


Cassette Slim type Circular Flow



Unique Circular Flow design


New Cassette type achieves a Circular airflow discharge in 360° direction by means of a high performance DC fan motor, new turbo fan and unique seamless airflow louver design.

- Ø7mm high density heat exchanger
- New DC fan motor
- High efficient turbo fan
- Seamless airflow louver

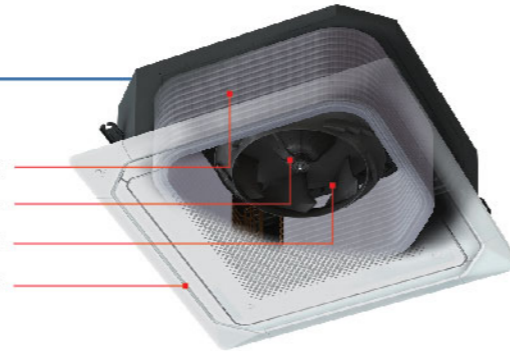

Uniform temperature air conditioning

Achieve a comfortable air conditioning spread to every corner of the room by circular flow & wide vertical airflow.

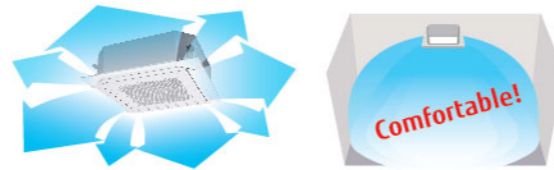

Individual louver control

Each louver can be set individually by Touch Panel Wired Remote Controller to enjoy the comfort of different directional airflows according to various room layouts.

* Touch Panel Wired RC (UTY-RNRGZ3) only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.

Efficient air conditioning based on the room layout

Human sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.

*Touch Panel Wired RC (UTY-RNRGZ3) only




Human sensor (Option)

2 modes can be selected

- Auto saving** Power is saved while people are away.
- Auto OFF** Operation stops after people go out.

Model : AUXN009GLAH* / AUXN012GLAH* / AUXN014GLAH* * AUXN**GLAH: Production by order
AUXM018GLEH / AUXM024GLEH / AUXM030GLEH

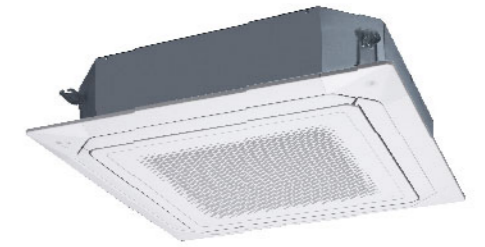

Specifications

Model name		AUXN009GLAH*	AUXN012GLAH*	AUXN014GLAH*	AUXM018GLEH	AUXM024GLEH	AUXM030GLEH
Power source		Single phase, ~230V, 50Hz					
Capacity	Cooling	2.8	3.6	4.5	5.6	7.1	9.0
	Heating	3.2	4.0	5.0	6.3	8.0	10.0
Input power		20	20	20	20	25	49
Airflow rate	High	1,050	1,050	1,050	1,050	1,120	1,470
	Med-H	930	930	930	930	1,050	1,160
	Med	900	900	900	900	930	1,070
	Med-L	870	870	870	870	900	930
	Low	810	810	810	810	870	900
Sound pressure level	Quiet	780	780	780	780	780	780
	High	33	33	33	33	35	40
	Med-H	32	32	32	32	33	36
	Med	31	31	31	31	32	34
	Med-L	30	30	30	30	31	32
Dimensions (H × W × D)	mm	246 × 840 × 840					
	kg(lbs)	24.5 (54)	24.5 (54)	24.5 (54)	24.0 (53)	24.5 (54)	24.5 (54)
Connection pipe diameter	Liquid (Flare)	6.35	6.35	6.35	6.35	9.52	9.52
	Gas (Flare)	12.70	12.70	12.70	12.70	15.88	15.88
Drain hose diameter (I.D./O.D.)		25 / 32					
Cassette Grille		UTG-UKGC-W / UTG-UKGA-B					
Dimensions (H×W×D)		53×950×950					
Weight		6.0 (13)					

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

When AUX*018GLEH is connected to the outdoor unit other than J-IVL, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas)

When AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH are connected to the outdoor unit other than J-IVL, gas pipe diameter should be Ø19.05.


*: AUXN009/012/014GLAH can be connected to J-IVS Series only.

Optional parts

- Human Sensor Kit: UTY-SHZXC
- Fresh Air Intake Kit: UTZ-VXRA
- Cassette Grille: UTG-UKGC-W, UTG-UKGA-B
- Wireless LAN Interface: UTY-TFSXZ1
- Wide Panel: UTG-AKXA-W
- Air Outlet Shutter Plate: UTR-YDZK
- External Power Supply Unit: UTZ-GXXA
- Panel Spacer: UTG-BKXA-W
- Insulation Kit for High Humidity: UTZ-KXRA
- IR Receiver Unit: UTY-LBHxD

Dimensions

(Unit : mm)

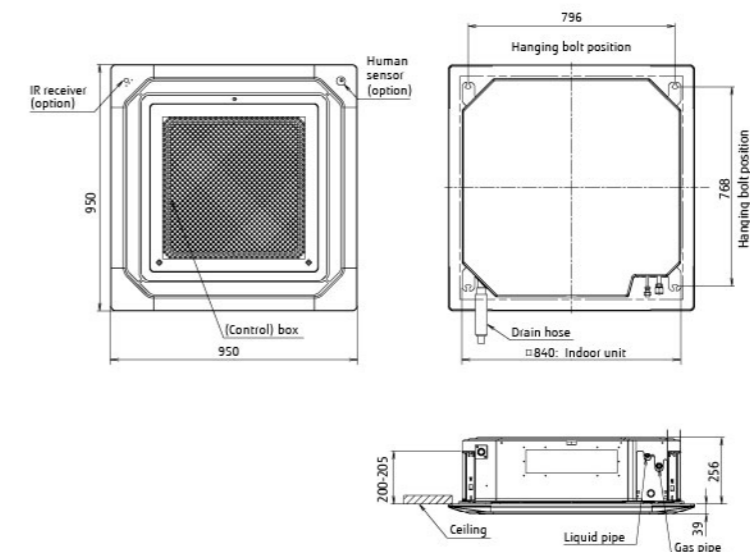


Cassette Slim type

4-way Flow




High efficiency turbo fan with 3-dimensional blade

High efficiency airflow distribution has been achieved by the introduction of a 3 dimensional blade which increases the air passing over the heat exchanger.

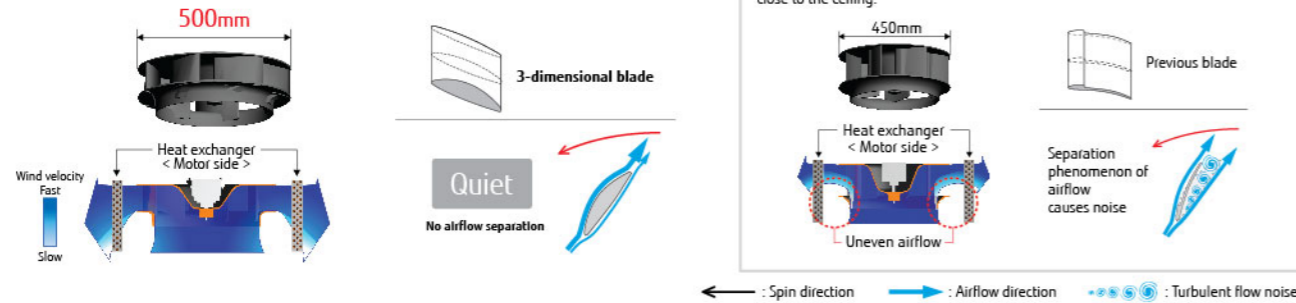


Improvement of the airflow distribution

The louver design distributes air leaving a space between the chassis and the ceiling allowing far and wide air flow distribution.

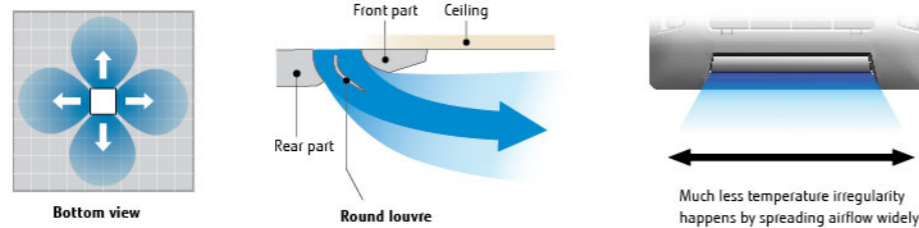

Adjustment of hanger position is possible after installation

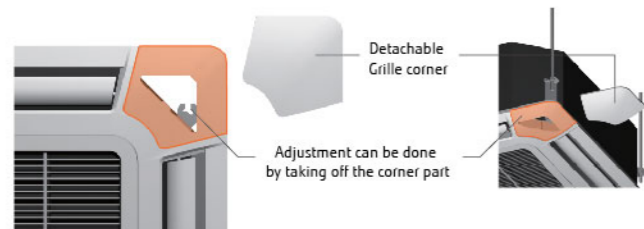

High ceiling mode

This cassette can be installed up to a height of 3.5m.

Model code	The maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
18	3.0	3.5
24	3.0	3.5

Model : AUXD18GALH / AUXD24GALH



Specifications

Model name			AUXD18GALH	AUXD24GALH
Power source			Single phase, ~230V, 50Hz	
Capacity	Cooling	kW	5.6	7.1
	Heating	kW	6.3	8.0
Input power		W	39	46
Airflow rate	High	m ³ /h	1,150 (319)	1,280 (356)
	Med	m ³ /h	940 (261)	1,040 (289)
	Low	m ³ /h	870 (242)	870 (242)
Sound pressure level	High	dB(A)	36	38
	Med	dB(A)	30	33
	Low	dB(A)	29	29
Net Dimensions (H × W × D)		mm	246 × 840 × 840	246 × 840 × 840
Weight		kg(lbs)	22 (49)	22 (49)
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52
	Gas (Flare)	mm	15.88	15.88
Drain hose diameter (I.D./O.D.)			25/32	
Cassette Grille	Model name		UTG-UGGA-W	
	Net Dimensions (H×W×D)	mm	50 × 950 × 950	
	Weight	kg(lbs)	5.5 (12)	

Note : Specifications are based on the following conditions.
 Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
 Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
 Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].


Optional parts

- IR receiver unit: UTY-LRHGB1
- Air outlet shutter plate: UTR-YDZC
- Panel spacer: UTG-BGYA-W
- Insulation kit for high humidity: UTZ-KXGB
- Wide panel: UTG-AGYA-W
- Fresh air intake kit: UTZ-VXGA
- Cassette Grille: UTG-UGGA-W
- Wireless LAN Interface: UTY-TFSXZ1



Dimensions

(Unit : mm)

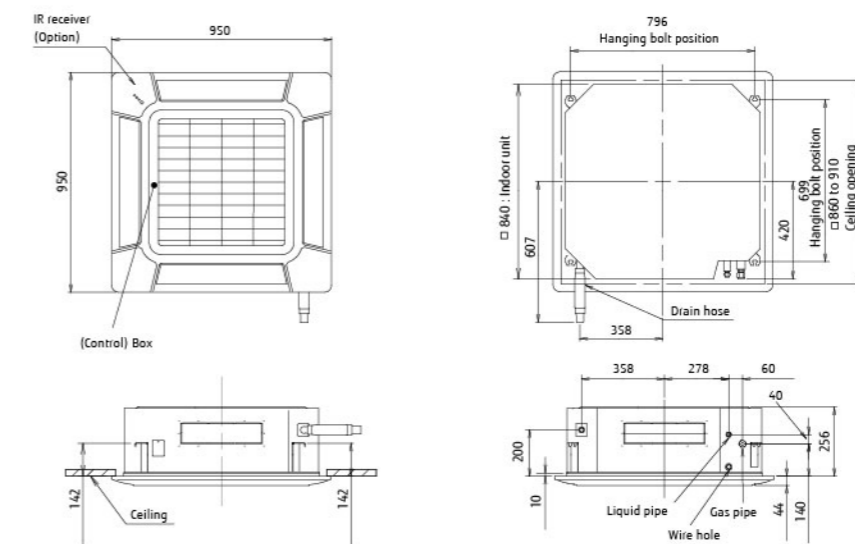


Cassette Large type Circular Flow




Unique Circular Flow design

New Cassette type achieves a Circular airflow discharge in 360° direction by means of a high performance DC fan motor, new turbo fan and unique seamless airflow louver design.

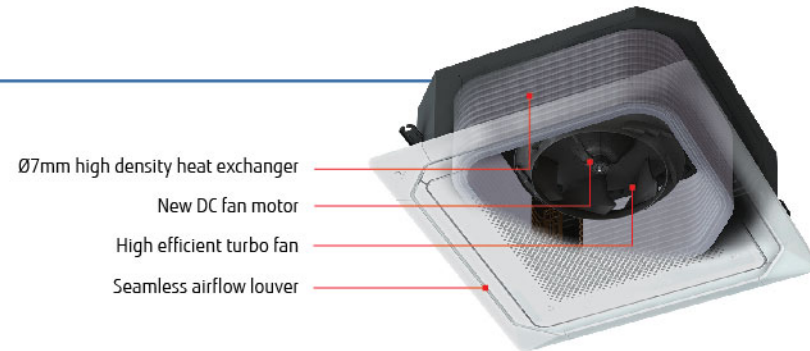

Uniform temperature air conditioning

Achieve a comfortable air conditioning spread to every corner of the room by circular flow & wide vertical airflow.

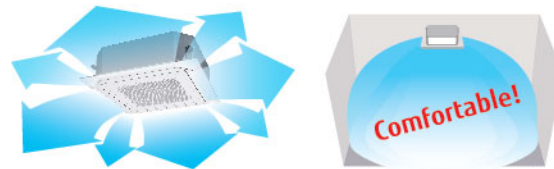

Individual louver control

Each louver can be set individually by Touch Panel Wired Remote Controller to enjoy the comfort of different directional airflows according to various room layouts.

* Touch Panel Wired RC (UTY-RNRGZ3) only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.

Efficient air conditioning based on the room layout

Human sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.

* Touch Panel Wired RC (UTY-RNRGZ3) only




Human sensor (Option)

2 modes can be selected

- Auto saving** Power is saved while people are away.
- Auto OFF** Operation stops after people go out.

Model : AUXK018GLEH / AUXK024GLEH / AUXK030GLEH
AUXK034GLEH / AUXK036GLEH / AUXK045GLEH
AUXK054GLEH

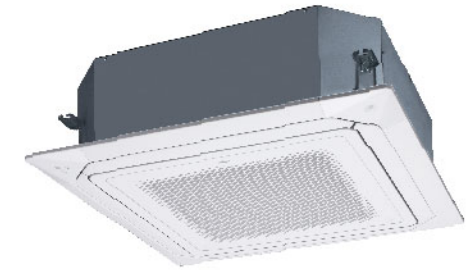

Specifications

Model name			AUXK018GLEH	AUXK024GLEH	AUXK030GLEH	AUXK034GLEH	AUXK036GLEH	AUXK045GLEH	AUXK054GLEH
Power source			Single phase, ~230V, 50Hz						
Capacity	Cooling	kW	5.6	7.1	9.0	10.0	11.2	12.5	14.0
	Heating	kW	6.3	8.0	10.0	11.2	12.5	14.0	16.0
Input power		W	40	40	47	47	61	89	116
Airflow rate	High	m ³ /h	1,420	1,420	1,440	1,440	1,620	1,820	2,040
	Med-H		1,360	1,360	1,400	1,400	1,500	1,590	1,800
	Med		1,300	1,300	1,340	1,340	1,400	1,500	1,590
	Med-L		1,270	1,270	1,300	1,300	1,340	1,400	1,440
	Low		1,200	1,200	1,280	1,280	1,280	1,300	1,300
Sound pressure level	Quiet	dB(A)	1,150	1,150	1,150	1,150	1,150	1,150	1,150
	High		38	38	39	39	41	44	47
	Med-H		37	37	38	38	40	42	45
	Med		36	36	37	37	38	40	42
	Med-L		35	35	36	36	37	38	39
Low	34	34	35	35	36	36	36	36	
Quiet	33	33	33	33	33	33	33	33	
Dimensions (H × W × D)	mm		288 × 840 × 840						
Weight	kg(lbs)		26.5 (58)	26.5 (58)	29.5 (65)	29.5 (65)	29.5 (65)	29.5 (65)	29.5 (65)
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52	9.52	9.52	9.52	9.52	9.52
	Gas (Flare)	mm	12.70	15.88	15.88	15.88	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32						
Cassette Grille	Model name	UTG-UKGC-W / UTG-UKGA-B							
	Dimensions (H×W×D)	mm	53×950×950						
	Weight	kg(lbs)	6.0 (13)						

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

When AUX*018GLEH is connected to the outdoor unit other than J-IVL, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas)


When AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH are connected to the outdoor unit other than J-IVL, gas pipe diameter should be Ø19.05.

Optional parts

Human Sensor Kit: UTY-SHZXC Fresh Air Intake Kit: UTZ-VXRA Cassette Grille: UTG-UKGC-W, UTG-UKGA-B Wireless LAN Interface: UTY-TFSXZ1
Wide Panel: UTG-AKXA-W Air Outlet Shutter Plate: UTR-YDZK External Power Supply Unit: UTZ-GXXA
Panel Spacer: UTG-BKXA-W Insulation Kit for High Humidity: UTZ-KXRA IR Receiver Unit: UTY-LBHXD

Dimensions

(Unit : mm)

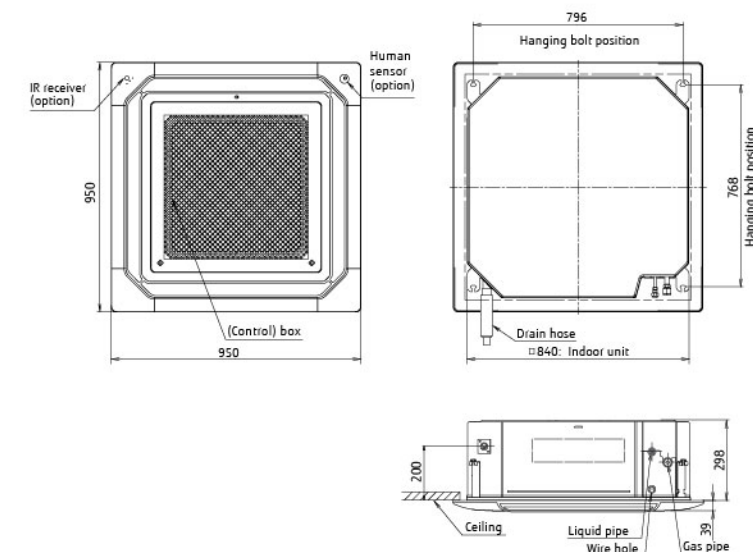


Cassette Large type

4-way Flow




High efficiency turbo fan with 3-dimensional blade

High efficiency airflow distribution has been achieved by the introduction of a 3 dimensional blade which increases the air passing over the heat exchanger.

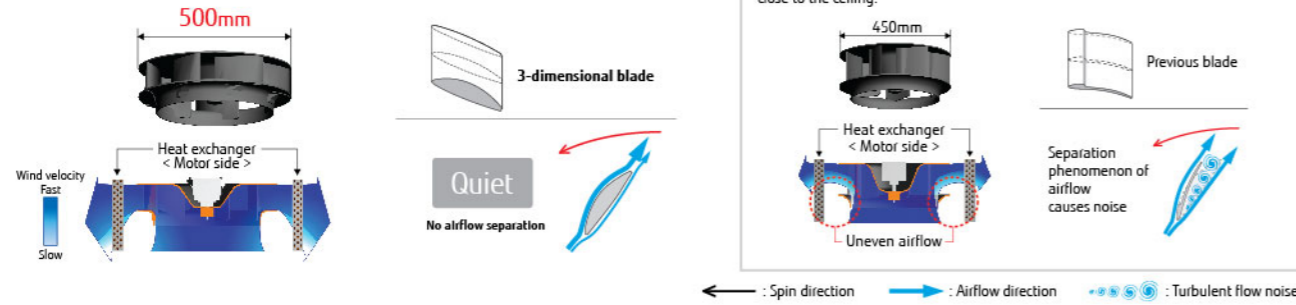


Improvement of the airflow distribution

The louver design distributes air leaving a space between the chassis and the ceiling allowing for wide and wide air flow distribution.

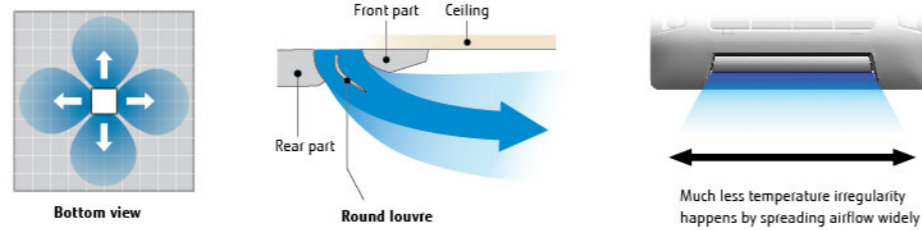

Adjustment of hanger position is possible after installation

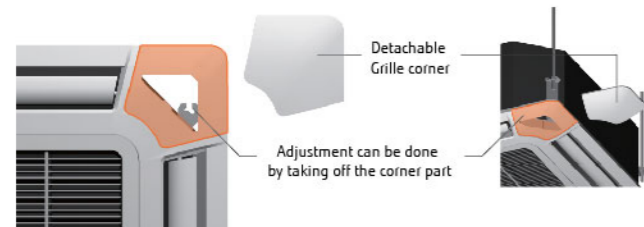

High ceiling mode

This cassette can be installed up to a height of 4.2m (36/45/54).

Model code	The maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
18	3.2	3.5
24	3.2	3.5
30	3.2	3.6
34	3.2	3.6
36	3.2	4.2
45	3.2	4.2
54	3.2	4.2

Model : AUXA18GALH / AUXA24GALH / AUXA30GALH
 AUXA34GALH / AUXA36GALH / AUXA45GALH
 AUXA54GALH



Specifications

Model name		AUXA18GALH*	AUXA24GALH*	AUXA30GALH	AUXA34GALH	AUXA36GALH	AUXA45GALH	AUXA54GALH
Power source		Single phase, ~230V, 50Hz						
Capacity	Cooling	5.6	7.1	9.0	10.0	11.2	12.5	14.0
	Heating	6.3	8.0	10.0	11.2	12.5	14.0	16.0
Input power		51	51	59	77	80	99	119
Airflow rate	High	1,420 (394)	1,420 (394)	1,600 (444)	1,750 (486)	1,800 (500)	1,900 (528)	2,000 (556)
	Med	1,230 (342)	1,230 (342)	1,300 (361)	1,300 (361)	1,300 (361)	1,370 (381)	1,370 (381)
	Low	1,100/1,000*(306/278)	1,100/1,000*(306/278)	1,100 (306)	1,100 (306)	1,100 (306)	1,100 (306)	1,100 (306)
Sound pressure level	High	40	40	40	43	44	46	47
	Med	36	36	38	38	38	39	39
	Low	33/31**	33/31**	33/31**	33/31**	33/31**	33/31**	33/31**
Net Dimensions (H × W × D)		288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840
Weight		27 (60)	27 (60)	27 (60)	27 (60)	27 (60)	27 (60)	27 (60)
Connection pipe diameter	Liquid (Flare)	9.52	9.52	9.52	19.05	19.05	19.05	19.05
	Gas (Flare)	15.88	15.88	15.88	19.05	19.05	19.05	19.05
Drain hose diameter (I.D./O.D.)		25/32						
Cassette Grille	Model name	UTC-UGGA-W						
	Net Dimensions (H×W×D)	50 × 950 × 950						
Weight		5.5 (12)						

Note : Specifications are based on the following conditions.
 Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
 Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
 Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].
 *1: This value is under cooling operation.
 *:AUXA18/24GALH can be connected to VR-IV / V-III Series only.


Optional parts

- IR receiver unit: UTY-LRHGB1
- Air outlet shutter plate: UTR-YDZC
- Panel spacer: UTC-BGYA-W
- Insulation kit for high humidity: UTZ-KXGB
- Wide panel: UTC-AGGA-W
- Fresh air intake kit: UTZ-VXGA
- Wireless LAN Interface: UTY-TFSXZ1
- Cassette Grille: UTC-UGGA-W



Dimensions

(Unit : mm)

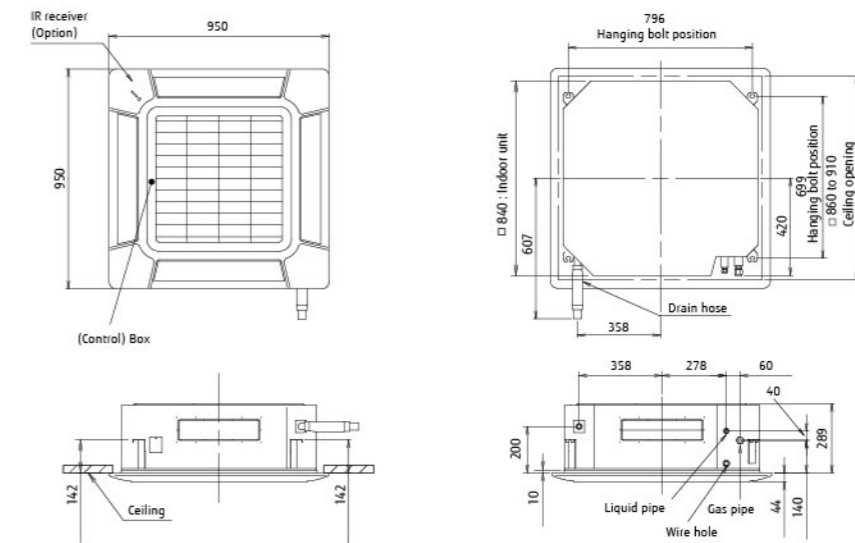


Low Static Pressure Duct Slim Duct / Slim Concealed Floor




Slim design

With a slim design, this indoor unit can be installed in narrow ceiling spaces.

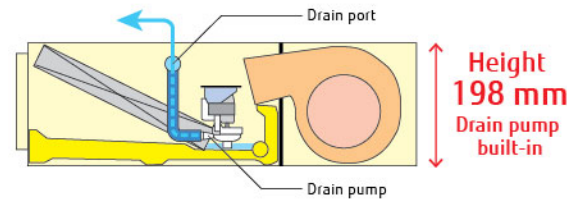


Air-intake

Air intake direction can be selected to match the installation site.

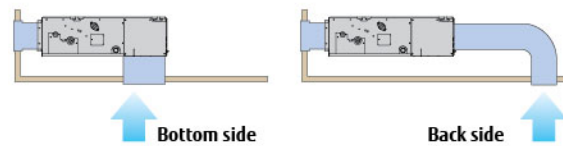


Flexible installation

Ceiling concealed

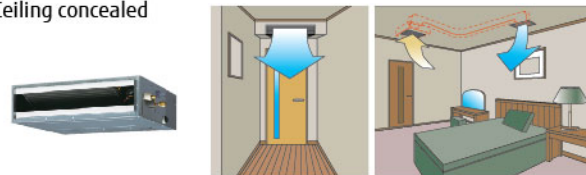

Floor concealed

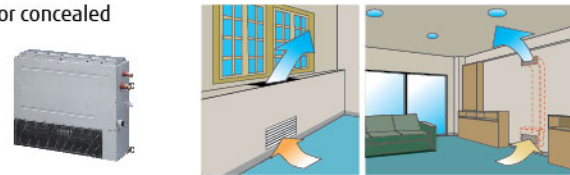

Selectable with a wide range of static pressure

By using DC fan motor, it is possible to change the static pressure range from 0 to 90Pa. The change of static pressure range is possible by remote controller.




Static pressure range
0 to 90Pa


*024 model is 0 to 50Pa

Filter (Accessory)

ARXD04/007/009/012/014/018 ARXD024

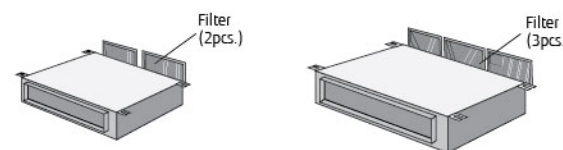

Model : ARXD04GALH / ARXD007GLEH / ARXD009GLEH
ARXD012GLEH / ARXD014GLEH / ARXD018GLEH
ARXD024GLEH

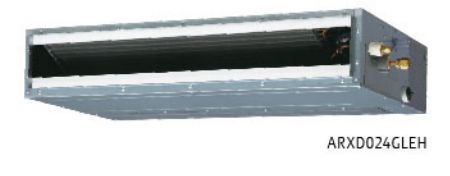

Specifications

Model name		ARXD04GALH*	ARXD007GLEH	ARXD009GLEH	ARXD012GLEH	ARXD014GLEH	ARXD018GLEH	ARXD024GLEH
Power source		Single phase, ~230V, 50Hz						
Capacity	Cooling	1.1	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	1.3	2.8	3.2	4.0	5.0	6.3	8.0
Input power		40	44	50	54	92	83	122
Airflow rate	High	510	550	600	600	800	940	1,330
	Med-H	-	480	510	530	680	820	1,140
	Med	400/470**	440	460	490	600	730	1,020
	Med-L	-	410	420	450	520	630	900
	Low	320/440**	370	370	410	440	540	780
Quiet		-	320	320	340	340	470	610
Static pressure range		0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 50
Standard static pressure		25	25	25	25	25	25	25
Sound pressure level	High	26	28	29	30	34	34	35
	Med-H	-	26	27	28	32	31	31
	Med	21/25**	25	25	27	30	29	29
	Med-L	-	24	24	26	28	27	27
	Low	20/22**	22	22	24	25	25	24
Quiet		-	21	21	22	22	23	21
Net Dimensions (H × W × D)		mm 198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620	198 × 1,100 × 620
Weight		kg (lbs) 17 (37)	17 (37)	17 (37)	18 (40)	18 (40)	22 (48)	26 (57)
Connection pipe diameter	Liquid (Flare)	6.35	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)	12.70	9.52	9.52	12.70	12.70	12.70	15.88
Drain hose diameter (I.D./O.D.)		25/32						

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.


Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

*1: This value is under cooling operation.

*ARXD04GALH cannot be connected to J-IVS / J-IVL Series.

Optional parts


Remote Sensor Unit :	UTY-XSZX	Auto Louver Grille Kit: UTD-GXTA-W (04/007/009/012/014)
IR Receiver Unit :	UTB-YWC (004)	UTD-GXTB-W (018)
	UTY-TRHX (007/009/012/014/018/024)	UTD-GXTC-W (024)
External Power Supply Unit :	UTZ-GXXA	

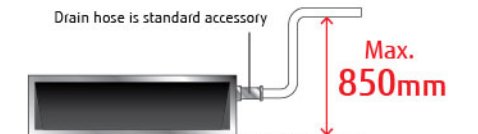

Dimensions


(Unit : mm)

*Service accessibility must be allowed for when installing the product. Please consult the installation manual for the necessary service access size.

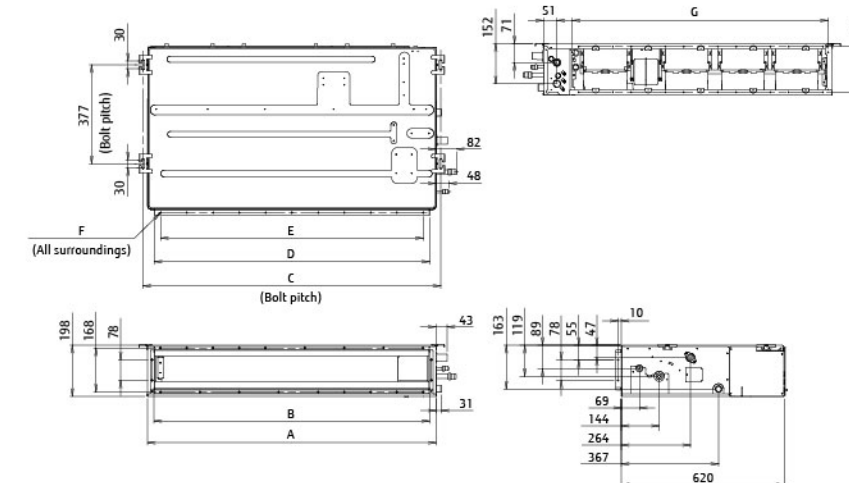

	ARXD04-014	ARXD018	ARXD024
A	700	900	1100
B	650	850	1050
C	734	934	1134
D	650	850	1050
E	P100×6=600	P100×8=800	P100×10=1000
F	18×Ø5	22×Ø5	26×Ø5
G	574	774	974


Low Static Pressure Duct / Concealed Floor

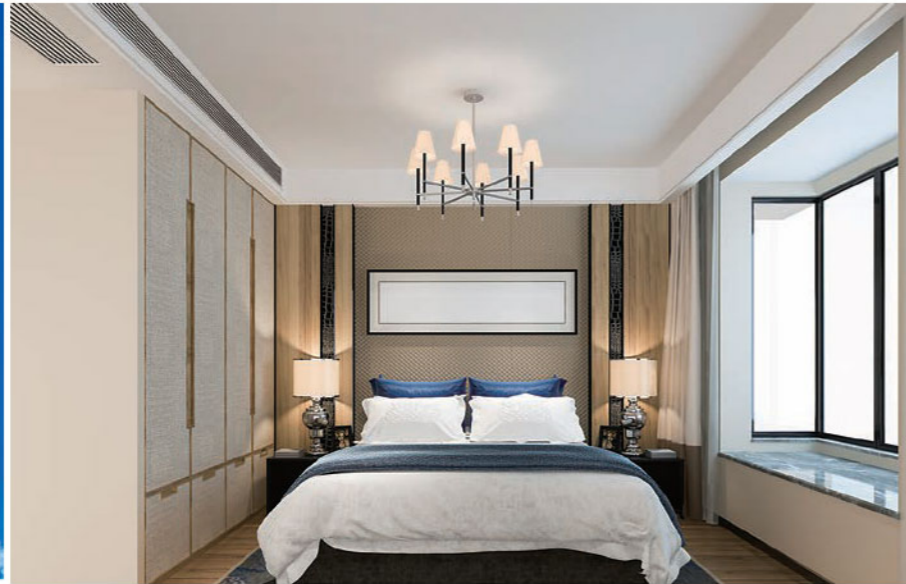

Low noise level


A low noise level has been achieved for each capacity

Model	7	9	12	14	18
Static pressure range	Pa 0 to 50				
Noise level (Low speed)	24	27	25	30	30

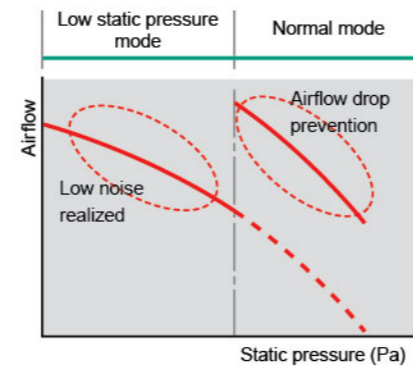



Compact design

Ultra-slim duct air conditioner for easy installation

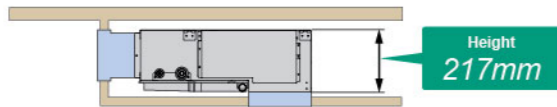


Slim size (217mm) allows installation even where the space above the ceiling is narrow.

Flexible installation

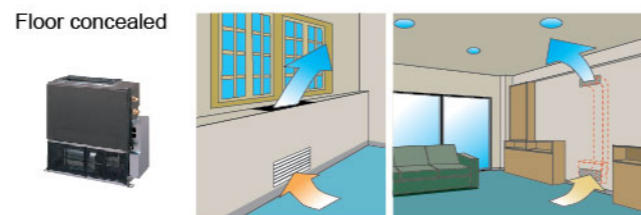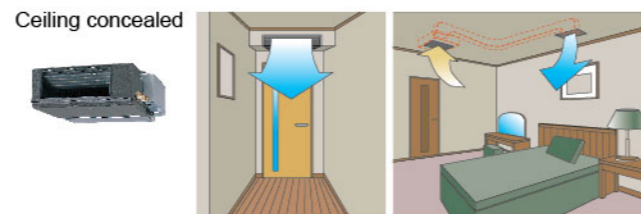


Two-direction drain piping

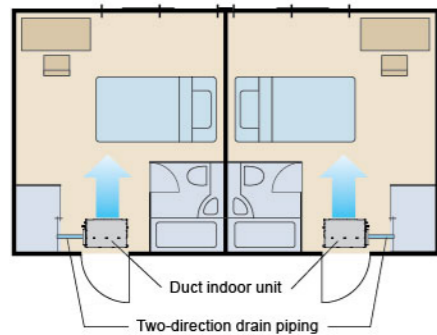


Air-intake

Air intake direction can be selected to match the installation site.

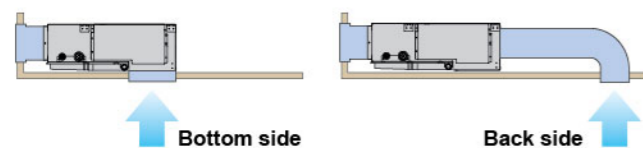

Filter (Accessory)

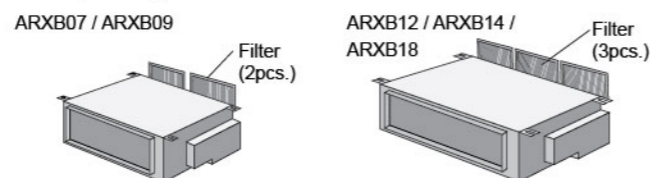

Models: ARXB07GALH / ARXB09GALH / ARXB12GALH
ARXB14GALH / ARXB18GALH



ARXB07GALH
ARXB09GALH

ARXB12GALH
ARXB14GALH
ARXB18GALH

Specifications

Model name	ARXB07GALH	ARXB09GALH	ARXB12GALH	ARXB14GALH	ARXB18GALH	
Power source	230V ~, 50Hz					
Capacity	Cooling	2.2	2.8	3.6	4.5	5.6
	Heating	2.8	3.2	4.0	5.0	6.3
Input power	W 46 55 63 90 96					
Airflow rate	High	370 (103)	440 (122)	590 (164)	800 (222)	890 (247)
	Med	310 (86)	370 (103)	500 (139)	750 (208)	810 (225)
	Low	280 (78)	340 (94)	450 (125)	700 (194)	730 (203)
Static pressure range	Pa 0 to 50 0 to 50 0 to 50 0 to 50 0 to 50					
Standard static pressure	25 25 25 25 25					
Sound pressure level	High	29	31	30	33	36
	Med	26	29	28	32	34
	Low	24	27	25	30	30
Dimensions (H x W x D)	mm 217 x 663 x 595		mm 217 x 953 x 595			
Weight	kg 15		kg 22		kg 23	
Connection pipe diameter	Liquid (Flare)	mm ø6.35			mm ø9.52	
	Gas (Flare)	mm ø12.70			mm ø15.88	
	Drain hose	VP25[ø25(I.D.); ø32(O.U.)]				

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.





Optional parts

- Remote Sensor Unit : UTY-XSZX
- IR Receiver Unit : UTB-YWC
- Drain Pump Unit : UTZ-PX1BBA

Dimensions (Unit : mm) () : AR7 / AR9

Models: ARXB07 / ARXB09 / ARXB12 / ARXB14 / ARXB18

*Service accessibility must be allowed for when installing the product.
Please consult the installation manual for the necessary service access size.

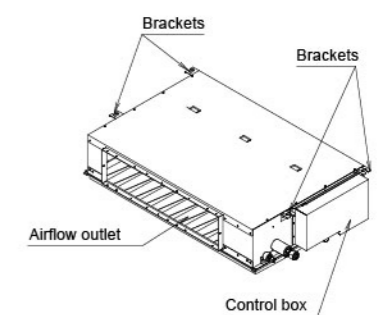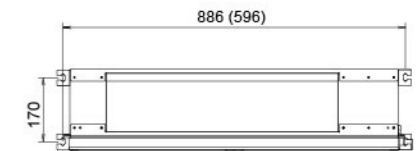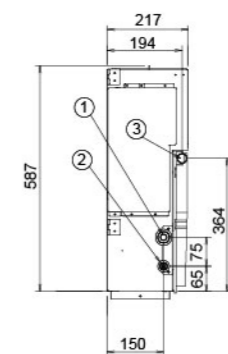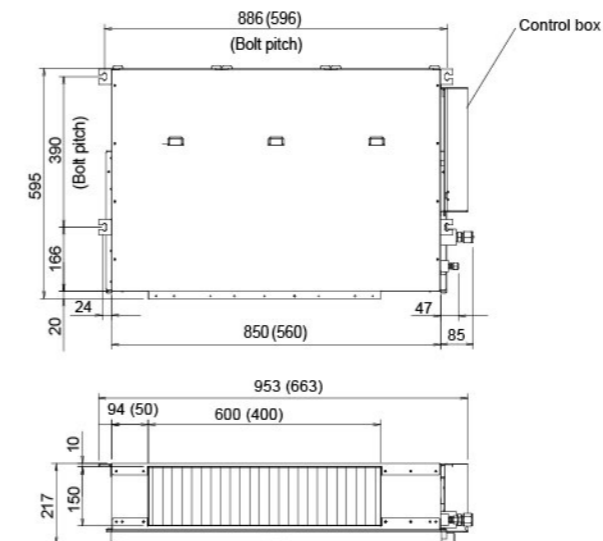


- ① Refrigerant piping flare connection (Gas)
- ② Refrigerant piping flare connection (Liquid)
- ③ Drain piping connection

Low Static Pressure Duct




Slim & Compact design

In the case of bottom return air connection, not only does the indoor unit design allow for installation in a narrow ceiling space of up to 270mm, Further space savings have been achieved by mounting the electrical control box internally inside the chassis.

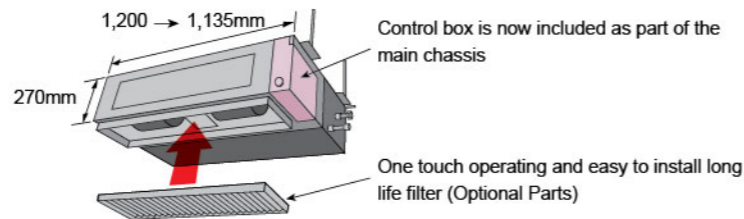

Line-up of low-noise and high-power models, compatible with a wide range of static pressure

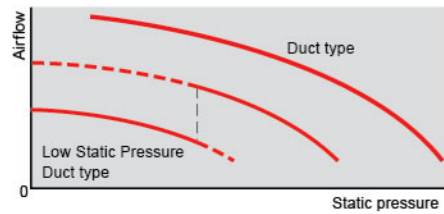

Low Static Pressure Duct type

Optimum model for hotels or bedrooms

An ultra low-noise model that achieves a quiet interior. Perfect for hotels or bedrooms with limited air duct installation space. Two different levels can be selected according to the static pressure range.




Duct type

Powerful model with a flexible design

With a powerful motor, appropriate for a wide range of static pressure. Flexible air duct installation is possible in a large space such as an office.




Two-direction drain piping

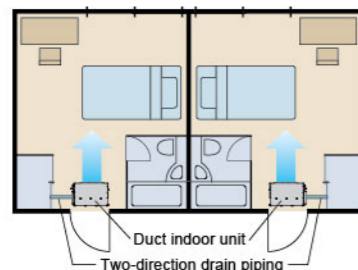

Easy maintenance


See below for the case of rear suction type

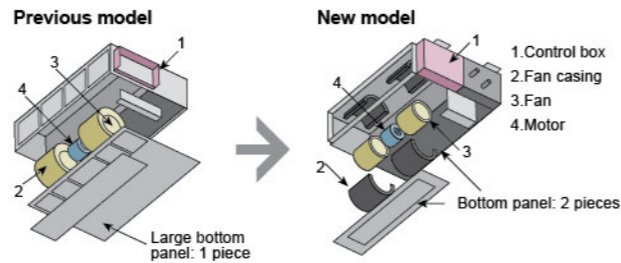


Structural improvement is attained by making the bottom panel two pieces, front and rear. The internal fan casing is also manufactured in two pieces, namely upper and lower. The maintenance of the motor and fan can be easily carried out by removing the rear panel and the lower part of the casing while leaving the main chassis installed.

Installation styles


Embedded in Ceiling

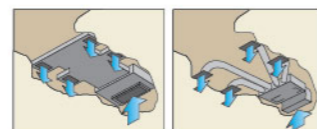

Hanging from Ceiling

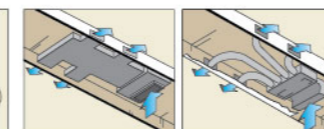

Models : ARXB24GALH / ARXB30GALH / ARXB36GALH / ARXB45GALH

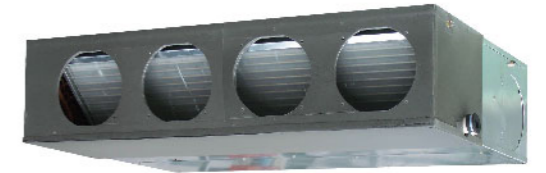

Specifications

Model name		ARXB24GALH	ARXB30GALH	ARXB36GALH	ARXB45GALH
Power source		230V ~, 50Hz			
Capacity	Cooling	7.1	9.0	11.2	12.5
	Heating	8.0	10.0	12.5	14.0
Input power		145	198	253	338
Airflow rate	High	1,100 (306)	1,410 (392)	1,710 (475)	1,970 (547)
	Med	920 (256)	1,280 (356)	1,600 (444)	1,790 (497)
	Low	810 (225)	1,150 (319)	1,470 (408)	1,670 (464)
Static pressure range		0 to 80	0 to 80	0 to 80	0 to 80
Standard static pressure		40	50	50	60
Sound pressure level	High	31	34	37	41
	Med	27	32	35	38
	Low	25	29	33	36
Dimensions (H x W x D)		270 x 1,135 x 700			
Weight		39		42	
Connection pipe diameter	Liquid (Flare)	ø9.52			
	Gas (Flare)	ø15.88		ø19.05	
	Drain hose	VP25[ø25(I.D.); ø32(O.U.)]			

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.

Optional parts

Remote Sensor Unit : UTY-XSZX

Flange (Round) : UTD-RF204

Long Life Filter : UTD-LF25NA

IR Receiver Unit : UTB-YWC

Flange (Square) : UTD-SF045T


Drain Pump Unit : UTZ-PX1NBA

Dimensions (Unit : mm)

Models: ARXB24 / ARXB30 / ARXB36 / ARXB45

*Service accessibility must be allowed for when installing the product.

Please consult the installation manual for the necessary service access size.

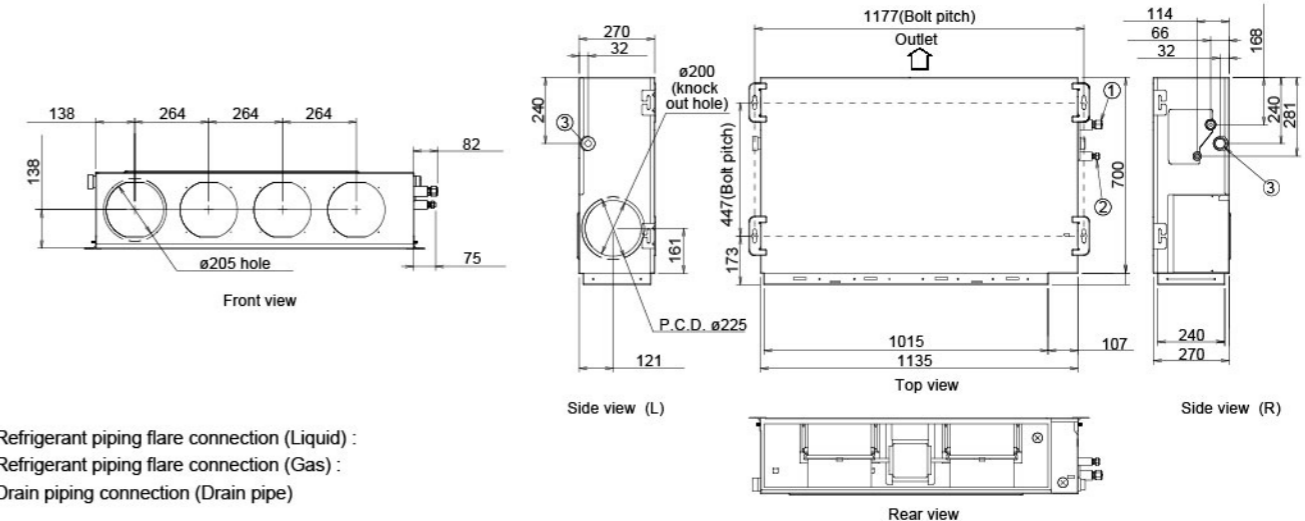

- ① Refrigerant piping flare connection (Liquid) :
- ② Refrigerant piping flare connection (Gas) :
- ③ Drain piping connection (Drain pipe)


Medium Static Pressure Duct



Feature

Slim & Compact design

The slim and compact design of the indoor unit, with the control box mounted on the side of the unit, allows installation in narrow spaces.

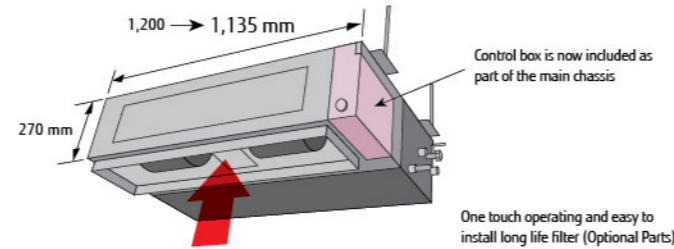


Selectable with a wide range of static pressure

It is possible to change of static pressure range 0 to 150 Pa.

Static pressure range
0 to 150 Pa

Can be installed for various location


It can be installed in such locations as high-rise condominiums by low static pressure design.

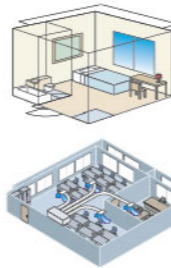

It can also be installed in wide space when high static pressure is required, such as for offices.

Easy maintenance

See below for the case of rear suction type

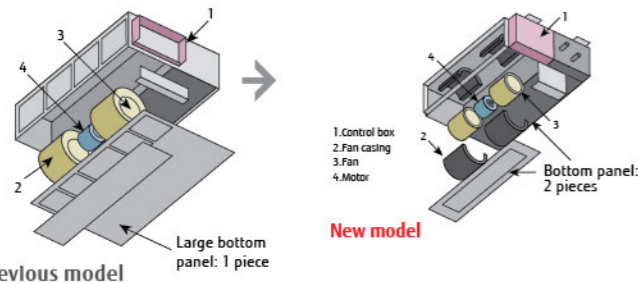


Structural improvement is attained by making the bottom panel two pieces, front and rear. The internal fan casing is also manufactured in two pieces, namely upper and lower. The maintenance of the motor and fan can be easily carried out by removing the rear panel and the lower part of the casing while leaving the main chassis installed.

Easy setting by using remote controller


The change of static pressure range is possible by remote controller



Installation styles

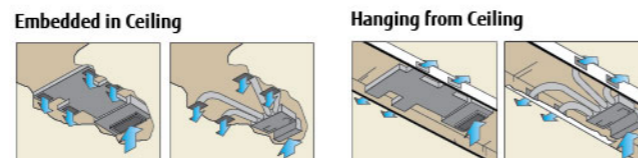

Two-direction drain piping

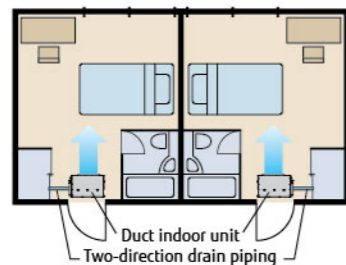

Models: ARXA24GBTH / ARXA30GBTH ARXA36GBTH / ARXA45GBTH



Specifications

Model name	ARXA24GBTH	ARXA30GBTH	ARXA36GBTH	ARXA45GBTH
Power source	Single phase, 220-240V, 50Hz			
Capacity	Cooling	7.1	9.0	11.2
	Heating	8.0	10.0	12.5
Input power	W	94	108	194
Airflow rate	High	1,280 (356)	1,410 (392)	1,840 (511)
	Med	990 (275)	1,280 (356)	1,600 (444)
	Low	840 (233)	1,150 (319)	1,470 (408)
Static pressure range	Pa	0 to 150	0 to 150	0 to 150
Standard static pressure		40	50	50
Sound pressure level	High	31	34	37
	Med	27	32	35
	Low	23	29	33
Dimensions (H × W × D)	mm	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700
Weight	kg(lbs)	39 (86)	42 (93)	42 (93)
				42 (93)
Connection pipe diameter	Liquid (Flare)	9.52	9.52	9.52
	Gas (Flare)	15.88	15.88	19.05
Drain hose diameter (I.D./O.D.)				25 / 32


Note : Specifications are based on the following conditions.
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

- Remote Sensor Unit : UTY-XSZX
- Long Life Filter : UTD-LF25NA Flange (Round) : UTD-RF204
- Flange (Square) : UTD-SF045T IR Receiver Unit : UTB-YWC
- Drain Pump Unit : UTZ-PX1NBA

Dimensions (Unit: mm)

*Service accessibility must be allowed for when installing the product. Please consult the installation manual for the necessary service access size.

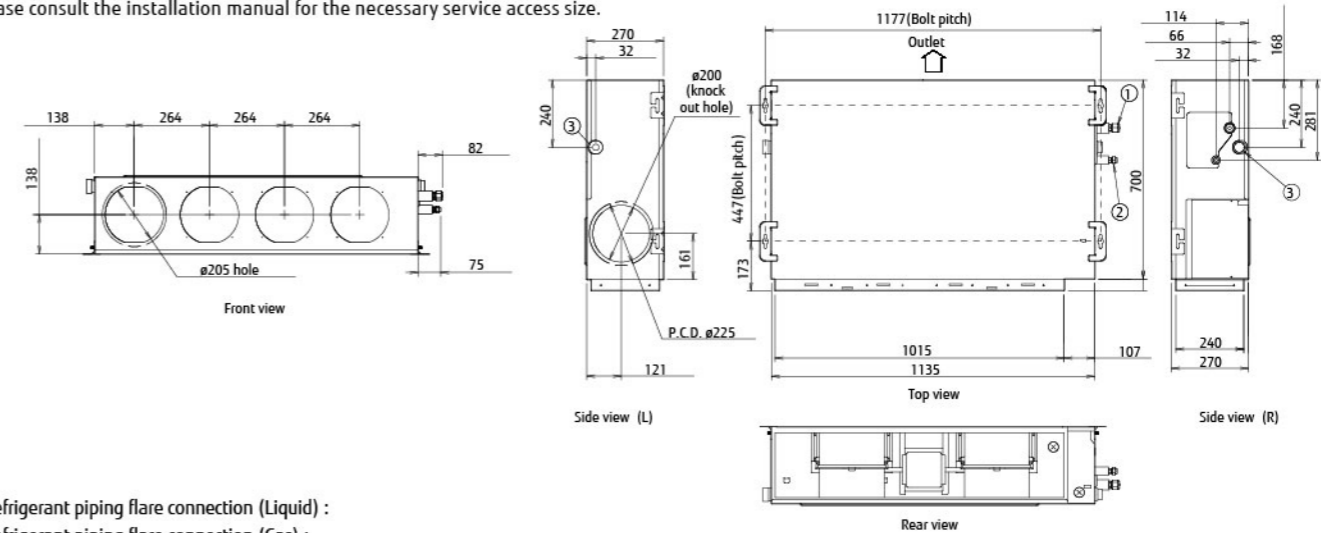


- ① Refrigerant piping flare connection (Liquid) :
- ② Refrigerant piping flare connection (Gas) :
- ③ Drain piping connection (Drain pipe)

High Static Pressure Duct Normal



Static pressure selection

By using DC fan motor, it is possible to change static pressure range from 0 to 200Pa (ARXC036) / 300Pa (ARXC72 / 90).

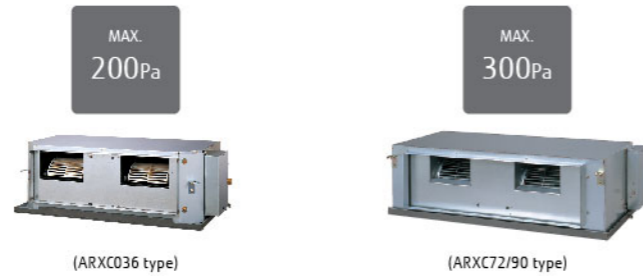


Easy installation (Compact size & Lightweight)

A compact size and lightweight indoor unit has been developed by reducing the basic chassis and the overall material weight.




Low noise

Models : ARXC036 / ARXC45 / ARXC60
Cutting off the corners of the conventional indoor unit front panel and fan casing, has enabled less turbulent air flow. Low noise is realized by adopting a plastic case and a plastic fan.

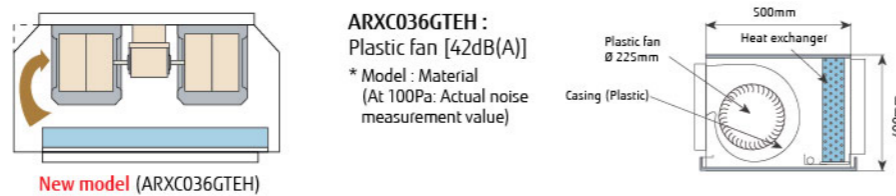

Low energy consumption by high efficiency DC fan motor

Improved motor efficiency from previous model.

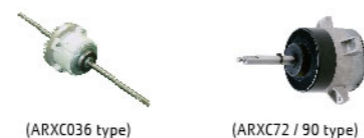

Model : ARXC036GTEH / ARXC45GATH / ARXC60GATH
ARXC072GATH / ARXC090GATH



ARXC036GTEH
ARXC45/60GATH



ARXC72/90GATH

Specifications

Model name		ARXC036GTEH	ARXC45GATH	ARXC60GATH*	ARXC072GATH*	ARXC090GATH*
Power source		Single phase, ~230V, 50Hz				
Capacity	Cooling	11.2	12.5	18.0	22.4	25.0
	Heating	12.5	14.0	20.0	25.0	28.0
Input power		207	715	730	1,110	1,250
Airflow rate	High	1,990	3,500	3,500	3,900	4,300
	Med	1,680	3,000	3,000	3,300	4,000
	Low	1,330	2,460	2,460	3,000	3,500
Static pressure range		0 to 200	100 to 250	100 to 250	0 to 300	0 to 300
Standard static pressure		100	100	100	260	250
Sound pressure level	High	42	49	49	51	53
	Med	36	45	45	48	51
	Low	32	42	42	45	49
Net Dimensions (H × W × D)		400 × 1,050 × 500	400 × 1,050 × 500	400 × 1,050 × 500	450 × 1,550 × 700	450 × 1,550 × 700
Weight		40 (88)	46 (101)	46 (101)	83 (185)	85 (185)
Connection pipe diameter	Liquid	9.52 (Flare)	9.52 (Flare)	9.52 (Flare)	12.70 (Flare)	2.70 (Flare)
	Gas	15.88 (Flare)	19.05 (Flare)	19.05 (Flare)	22.22 (Flare)	22.22 (Flare)
Drain hose diameter (I.D./O.D.)		25/32				

Note : Specifications are based on the following conditions.
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].
*: ARXC60/072/090 cannot be connected to J-IVS Series.

Optional parts



Long-Life Filter : UTD-LF60KA (036/45/60)
IR Receiver Unit : UTB-YWC (45/60/72/90)
UTY-TRHX (036)
External Power Supply Unit : UTZ-CXXA (036)
Wireless LAN Interface : UTY-TFSXZ1 (036)

Dimensions

(Unit : mm)

Models: ARXC036 / ARXC45 / ARXC60

Models: ARXC72 / ARXC90

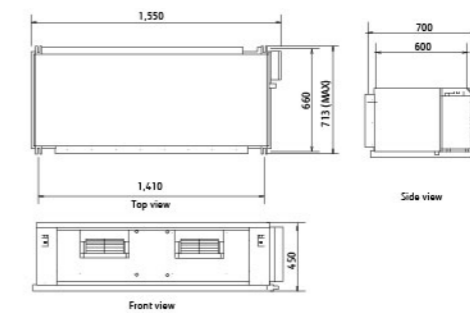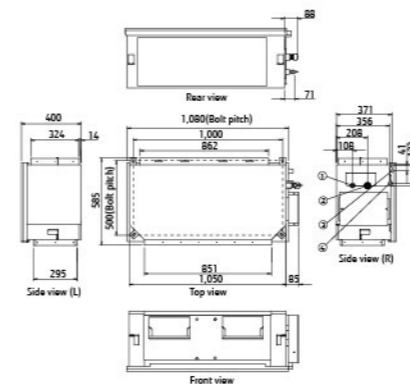


- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection (safety drain pan)
- ④ Drain piping connection (Main drain pan)

Compact floor




2-Fan & Wide airflow

Individual vertical airflow by 2-fan can control the whole room comfortably.

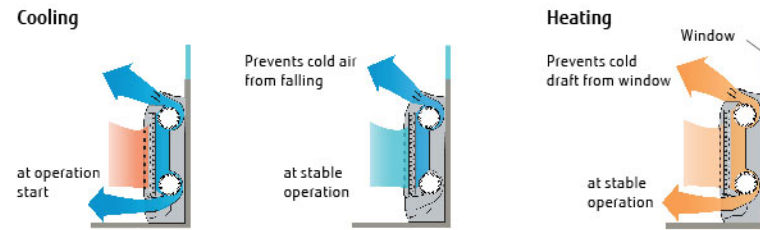


Flexible & easy installation

Due to compact and whole surface suction method model, floor, concealed, half concealed, or wall mounted installation can be available to match the room layout.

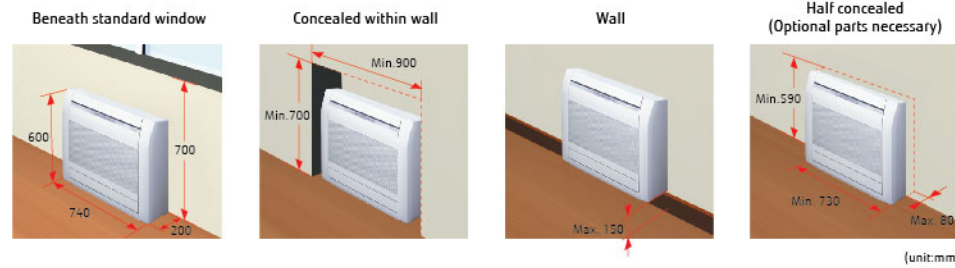


Quiet operation

Quiet operation is realized by 6 fan speed control. (via 2 wire controller)

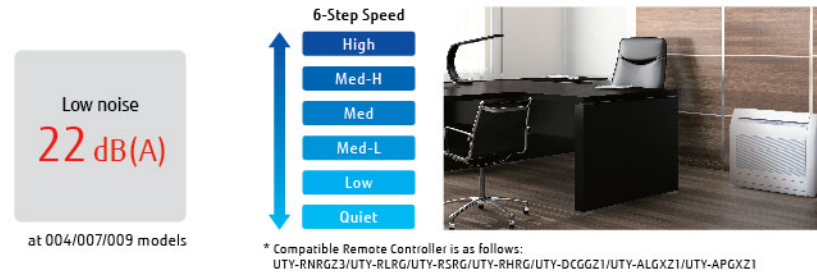

Flexible piping connection 6 direction of drain & piping

Drain hose and piping can be drawn flexibly in the right, left, side, and down directions

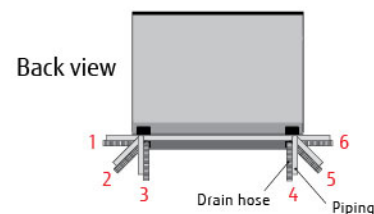

Model : AGHA004GCCGH / AGHA007GCCGH / AGHA009GCCGH
AGHA012GCCGH / AGHA014GCCGH

[EEV external]
AGHE004GCEH / AGHE007GCEH / AGHE009GCEH
AGHE012GCEH / AGHE014GCEH



Specifications

Model name	Single phase, ~230V, 50Hz					Single phase, ~230V, 50Hz					
	AGHA004GCCGH	AGHA007GCCGH	AGHA009GCCGH	AGHA012GCCGH	AGHA014GCCGH	AGHE004GCEH	AGHE007GCEH	AGHE009GCEH	AGHE012GCEH	AGHE014GCEH	
Power source	Capacity	kW									
	Heating	kW									
Input power	Capacity	W									
	Heating	W									
Airflow rate	High	m ³ /h									
	Med-H	m ³ /h									
	Med	m ³ /h									
	Med-L	m ³ /h									
	Low	m ³ /h									
	Quiet	m ³ /h									
Sound pressure level	High	dB(A)									
	Med-H	dB(A)									
	Med	dB(A)									
	Med-L	dB(A)									
	Low	dB(A)									
	Quiet	dB(A)									
Net Dimensions (H × W × D)	mm					mm					
Weight	kg(lbs)					kg(lbs)					
Connection pipe diameter	Liquid (Flare)	mm									
	Gas (Flare)	mm									
Drain hose diameter (I.D./O.D.)											
EV Kit (option)											


Note : Specifications are based on the following conditions.
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].
When AGHA004/007/009GCCGH, AGHE004/007/009GCEH are connected to the outdoor unit other than J-IVL, gas pipe diameter should be Ø12.70.

Optional parts

- Half concealed kit : UTR-STA
- External Power Supply Unit : UTZ-GXXA
- Wireless LAN Interface : UTY-TFSXZ1

Dimensions

(Unit : mm)

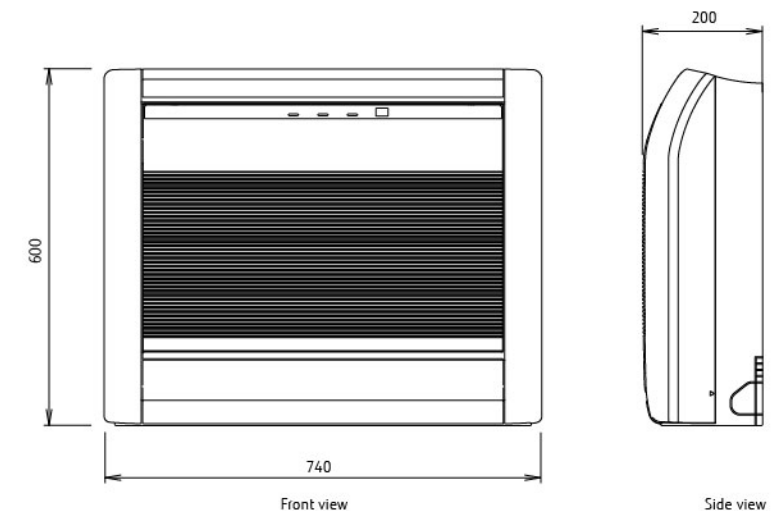

Floor / Ceiling



Model : ABHA012GTEH / ABHA014GTEH / ABHA018GTEH / ABHA024GTEH



Floor standing



Flexible installation

Example for floor Installation
Floor console



Example for ceiling Installation
Under ceiling



Specifications

Model name		ABHA012GTEH	ABHA014GTEH	ABHA018GTEH	ABHA024GTEH
Power source		Single phase, ~230V, 50Hz			
Capacity	Cooling	3.6	4.5	5.6	7.1
	Heating	4.0	5.0	6.3	8.0
Input power		30	42	74	99
Airflow rate	High	660	780	1,000	1,000
	Med-H	620	740	910	930
	Med	580	690	830	870
	Med-L	550	640	750	800
	Low	520	600	660	740
	Quiet	490	550	580	680
Sound pressure level	High	36	40	46	47
	Med-H	34	39	44	45
	Med	33	38	42	43
	Med-L	31	36	40	41
	Low	29	35	37	39
	Quiet	28	34	35	37
Net Dimensions (H × W × D)		mm 199 × 990 × 655	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655
Weight		kg(lbs) 25 (55)	26 (57)	26 (57)	27 (60)
Connection pipe diameter	Liquid (Flare)	6.35	6.35	6.35	9.52
	Gas (Flare)	12.70	12.70	12.70	15.88
Drain hose diameter (I.D./O.D.)		25/32			

Note : Specifications are based on the following conditions.
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].


Optional parts

External Power Supply Unit : UTZ-CXXA
Wireless LAN Interface : UTY-TFSXZ1


Double auto swing

A combination of up/down and right/left directional swing allows three-dimensional air direction control.

RIGHT and LEFT SWING

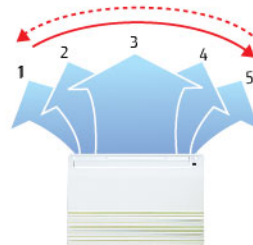

UP and DOWN SWING



4 steps selectable


High power DC fan motor

- High power
- Wide rotation range
- High efficiency




Compact design

Symmetrical, slim and compact design.

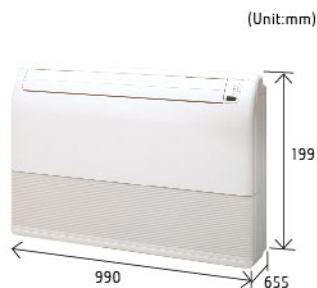

Dimensions

(Unit : mm)

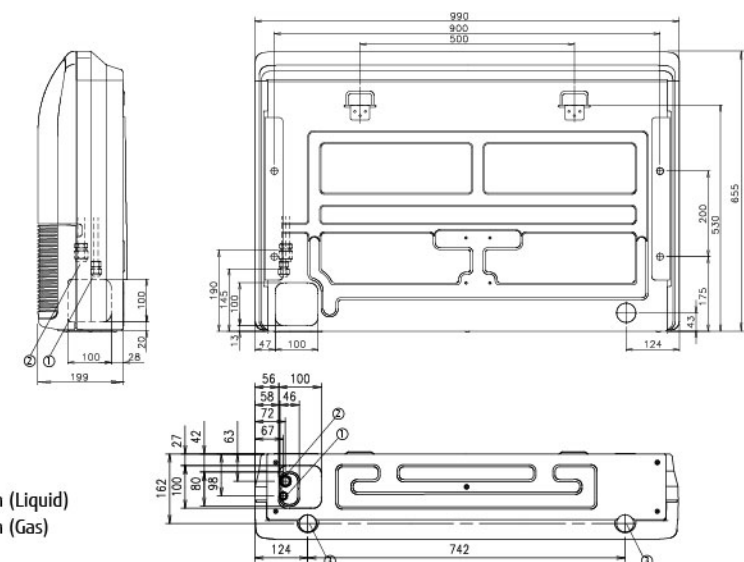


- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection

Ceiling




Installation

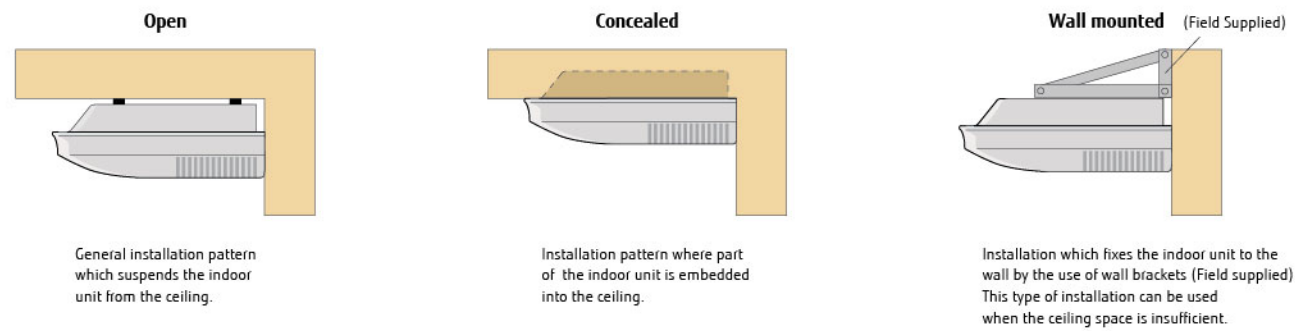

Double auto swing and wide airflow

Auto airflow direction and auto swing

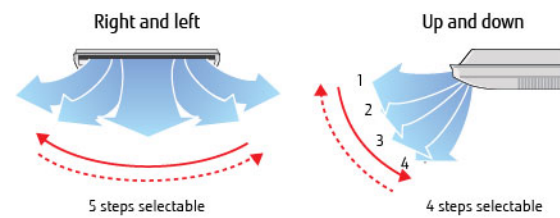


High power DC fan motor

- High power
- Wide rotation range
- High efficiency




Long airflow

Long Airflow ensures comfort to every corner of a large room.

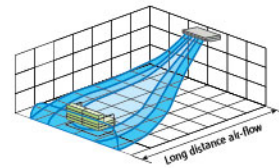

Fresh air intake

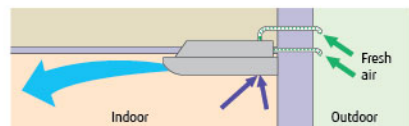

Slim & Compact design



Model : ABHA030GTEH / ABHA036GTEH / ABHA045GTEH / ABHA054GTEH




Specifications

Model name		ABHA030GTEH	ABHA036GTEH	ABHA045GTEH	ABHA054GTEH
Power source		Single phase, ~230V, 50Hz			
Capacity	Cooling	9.0	11.2	12.5	14.0
	Heating	10.0	12.5	14.0	16.0
Input power		66	85	131	180
Airflow rate	High	1,630	1,690	2,010	2,270
	Med-H	1,520	1,560	1,840	2,070
	Med	1,420	1,450	1,690	1,860
	Med-L	1,320	1,360	1,530	1,660
	Low	1,220	1,270	1,380	1,470
	Quiet	1,140	1,170	1,230	1,280
Sound pressure level	High	42	45	48	51
	Med-H	40	41	46	49
	Med	39	39	45	46
	Med-L	37	38	41	43
	Low	35	36	38	40
	Quiet	33	34	35	36
Net Dimensions (H × W × D)		mm 240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700
Weight		kg(lbs) 46 (101)	48 (106)	48 (106)	48 (106)
Connection pipe diameter	Liquid (Flare)	9.52	9.52	9.52	9.52
	Gas (Flare)	15.88	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)		25/32			

Note : Specifications are based on the following conditions.
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].


Optional parts

- Drain Pump Unit : UTR-DPB24T
- Flange : UTD-RF204
- External Power Supply Unit : UTZ-GXXA
- Wireless LAN Interface : UTY-TFSXZ1

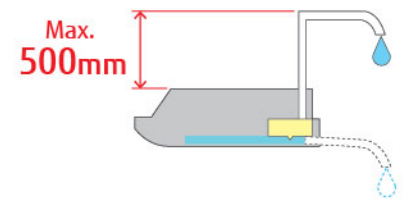

Dimensions

(Unit : mm)

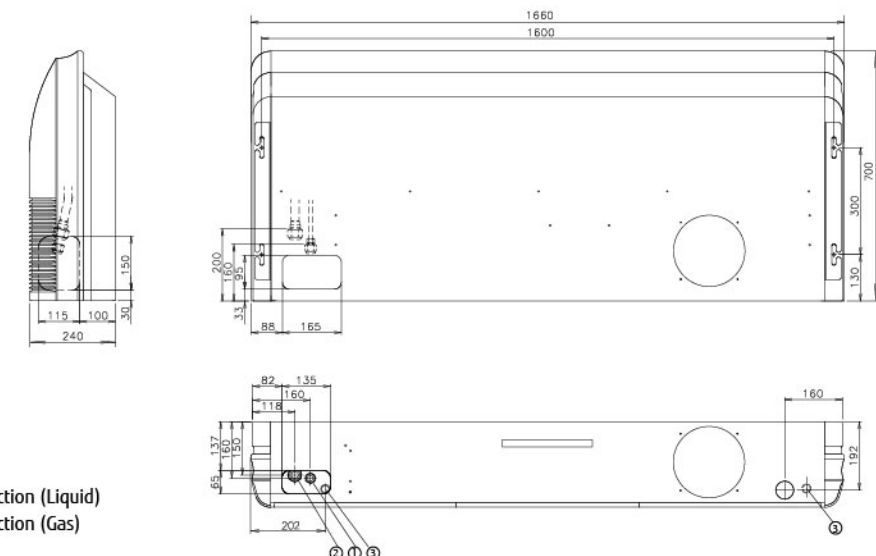

- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection

Wall Mounted




High efficient compact design

The 004-014 model has a common design. High efficient compact design has been achieved by mounting a high density and large heat exchanger. Compact body makes it possible to install discretely even in a meeting or office room and comfortable air conditioning is provided.

High density heat exchanger

Making the tube thin: **5mm**
Increase of heat exchanger volume by high density and adopting sub heat exchanger

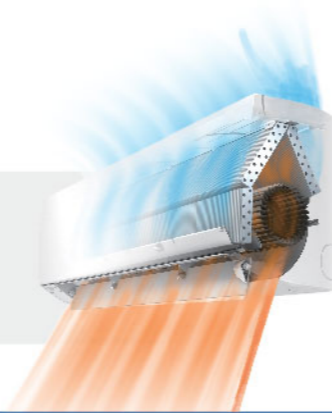


More comfort airflow

Comfortable air conditioning is provided by mounting our unique power diffuser.

Heating

Vertical airflow provides powerful floor level heating

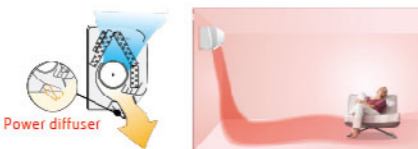


Cooling

Horizontal airflow does not blow cool air directly at the occupants in the room.




Quiet operation & 6 Fan Speed Control

Drastic low noise is achieved by new airflow structure. Multistep airflow control is possible to suit the environment.

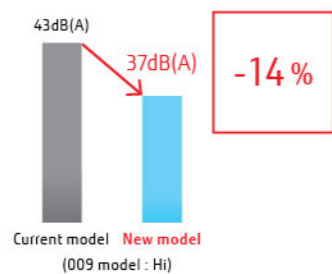


- 6-Step Speed
- High
- Med-H
- Med
- Med-L
- Low
- Quiet

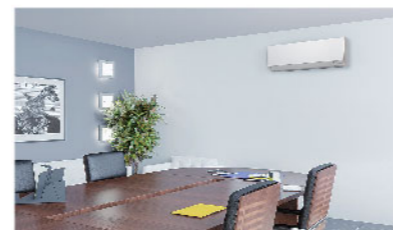

* Compatible Remote Controller is as follows:
UTY-RNRG23/UTY-RLRG/UTY-RSRG/UTY-RHRG/UTY-DCGG21/UTY-ALGX21/UTY-APGX21

Human sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.

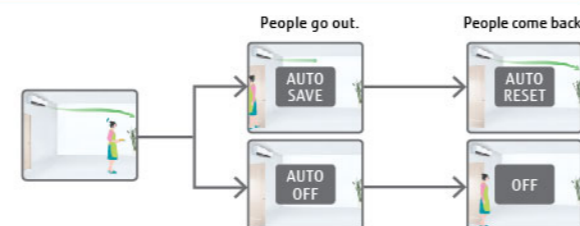

Model : ASHA004GCGH / ASHA007GCGH / ASHA009GCGH
ASHA012GCGH / ASHA014GCGH

[EEV external]
ASHE004GCEH / ASHE007GCEH / ASHE009GCEH
ASHE012GCEH / ASHE014GCEH



Specifications

Model name		ASHA004GCGH	ASHA007GCGH	ASHA009GCGH	ASHA012GCGH	ASHA014GCGH	ASHE004GCEH	ASHE007GCEH	ASHE009GCEH	ASHE012GCEH	ASHE014GCEH	
Power source		Single phase, ~230V, 50Hz						Single phase, ~230V, 50Hz				
Capacity	Cooling	1.1	2.2	2.8	3.6	4.0	1.1	2.2	2.8	3.6	4.0	
	Heating	1.3	2.8	3.2	4.0	4.5	1.3	2.8	3.2	4.0	4.5	
Input power		12	19	20	25	36	12	19	34	25	36	
Airflow rate	High	450	550	610	690	800	450	550	610	690	800	
	Med-H	430	510	560	610	740	430	510	560	610	740	
	Med	400	470	510	560	680	400	470	510	560	680	
	Med-L	380	410	440	530	610	380	410	440	530	610	
	Low	360	360	360	470	550	360	360	360	470	550	
Sound pressure level	Quiet	310	310	310	330	330	310	310	310	330	330	
	High	31	34	37	40	44	31	35	43	40	44	
	Med-H	30	32	35	37	42	30	32	38	37	42	
	Med	28	30	32	35	40	28	30	34	35	40	
	Med-L	27	28	29	33	37	27	27	29	33	37	
Low	26	26	26	30	34	26	24	24	30	34		
Quiet	22	22	22	24	24	22	22	22	24	24		
Net Dimensions (H x W x D)		mm 268 x 840 x 203					mm 268 x 840 x 203					
Weight		kg(lbs) 8.0 (18.0) 8.5 (19.0) 8.5 (19.0) 8.5 (19.0) 8.5 (19.0)					kg(lbs) 8.0 (18.0) 8.5 (19.0) 8.5 (19.0) 8.5 (19.0) 8.5 (19.0)					
Connection pipe diameter	Liquid (Flare)	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	
	Gas (Flare)	9.52	9.52	9.52	12.70	12.70	9.52	9.52	9.52	12.70	12.70	
Drain hose diameter (I.D./O.D.)		13.8/15.8 to 16.7					13.8/15.8 to 16.7					
EV Kit (option)		-					UTR-EV09XB		UTR-EV14XB			

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / 15°CWB, and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

When ASH*004G**H, ASH*007G**H, ASH*009G**H are connected to the outdoor unit other than J-IVL, gas pipe diameter should be Ø12.70.



Optional parts

External Power Supply Unit : UTZ-GXXA

Wireless LAN Interface : UTY-TFSXZ1

Dimensions

(Unit : mm)

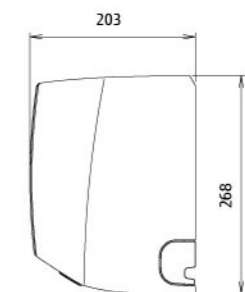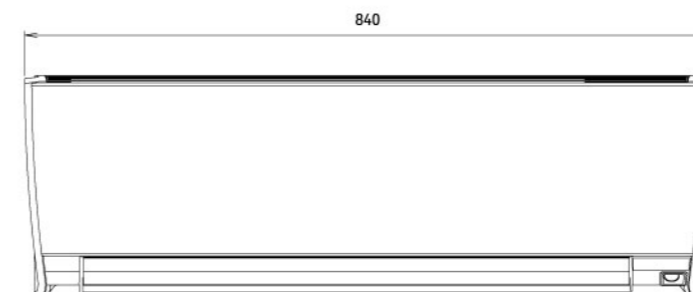


Wall Mounted




Powerful & Comfort airflow

Powerful Airflow
(ASHA030GTEH)

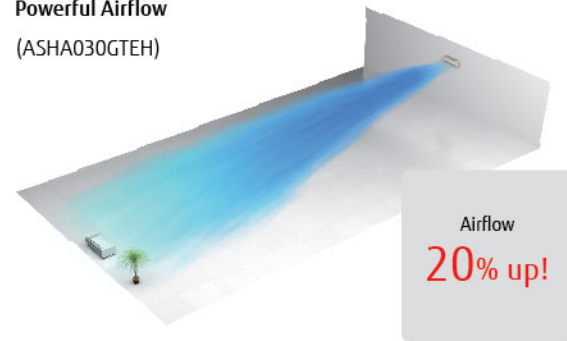

Power diffuser
(ASHA18/24GBCH)

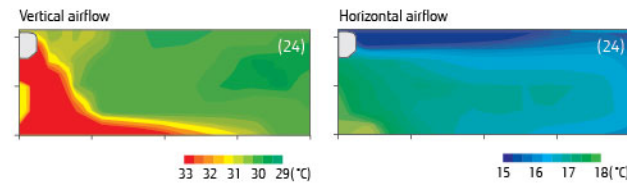


Human sensor (ASHA030/034GTEH only)

A human sensor senses the movement of humans to reduce operation when one is in the room. The energy consumption is reduced automatically to keep down electricity bills.
(Available to wired remote controller as UTY-RNRGZ3)



Quiet operation & 6 Fan speed control

Drastic low noise is achieved by new airflow structure. In addition, multistep quiet operation is available by 6-step sound level settings.

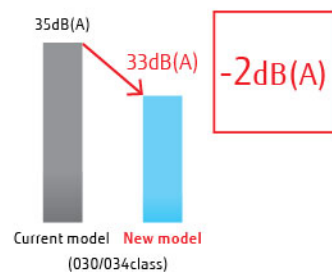

- 6-Step Speed
- High
- Med-H
- Med
- Med-L
- Low
- Quiet



* Compatible Remote Controller is as follows:
UTY-RNRGZ3/UTY-RLRG/UTY-R5RG/UTY-RHRG/UTY-DCGGZ1/UTY-ALGXZ1/UTY-APGXZ1

Model : ASHA18GBCH / ASHA24GBCH
ASHA030GTEH / ASHA034GTEH



ASHA18/24GBCH



ASHA030/034GTEH

Specifications

Model name		ASHA18GBCH	ASHA24GBCH	ASHA030GTEH	ASHA034GTEH
Power source		Single phase, ~230V, 50Hz			
Capacity	Cooling	5.6	7.1	9.0	10.0
	Heating	6.3	8.0	10.0	11.2
Input power		32	60	74	103
Airflow rate	High	840	1,100	1,440	1,620 / 1,520
	Med-H	-	-	1,200	1,300
	Med	770	910	1,050	1,120
	Med-L	-	-	940	980
	Low	690	730	890	890
	Quiet	-	-	700	700
Sound pressure level	High	41	48	53	55 / 54
	Med-H	-	-	49	51
	Med	39	43	45	47
	Med-L	-	-	42	43
	Low	35	35	39	39
	Quiet	-	-	33	33
Net Dimensions (H x W x D)		mm 320 x 998 x 238	320 x 998 x 238	340 x 1,150 x 280	340 x 1,150 x 280
Weight		kg(lbs) 15 (33)	15 (33)	18 (40)	18 (40)
Connection pipe diameter	Liquid (Flare)	6.35	9.52	9.52	9.52
	Gas (Flare)	12.70	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)		12/16		13.8/15.8 to 16.7	

Note : Specifications are based on the following conditions.
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].
When ASHA18GBCH is connected to the outdoor unit other than J-IVL, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas).

Optional parts


External Power Supply Unit : UTZ-GXXA (030/034)
Wireless LAN Interface : UTY-TFSXZ1 (030/034)

Dimensions

(Unit : mm)

Models: ASHA18 / ASHA24

Models: ASHA030 / ASHA034

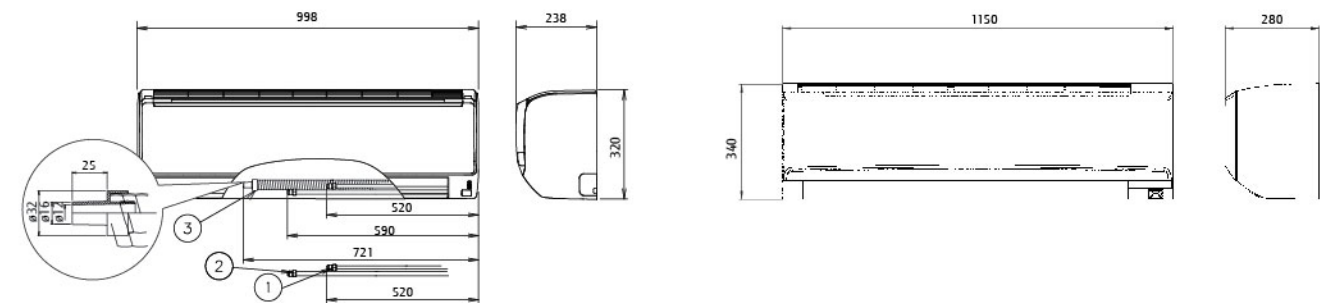

- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection

Residential, Commercial & Light Commercial VENTILATION

VENTILATION Lineup

- 098 Energy Recovery Ventilator
- 100 DX Kit for Air Handling Application
 - for VRF Outdoor Unit
- 102 Outdoor Air Unit











Effective heat exchange and simultaneous fresh air ventilation

High Efficiency and low noise levels are achieved by using a highly efficient heat exchange process. A comfortable air conditioned space is achieved by conveniently selecting whether to use heat exchange or normal ventilation setting, according to the requirements of the conditioned space.

Lineup

Airflow rate (m³/h)	250	350	500	800	1000
Energy Recovery Ventilator	 UTZ-BD025C	 UTZ-BD035C	 UTZ-BD050C	 UTZ-BD080C	 UTZ-BD100C

Connectable capacity class (kW)	5.0	6.3	8.0	10.0	12.5	14.0	20.0	25.0	40.0	50.0
DX Kit for Air Handling Applications for VRF Outdoor Unit	 EEV unit UTP-VX30A	 Control unit UTY-VDGX	 EEV unit UTP-VX60A	 Control unit UTY-VDGX	 EEV unit UTP-VX90A	 Control unit UTY-VDGX	 EEV unit UTP-VX90A×2	 Control unit UTY-VDGX		

Connectable capacity class (kW)	14.0 kW	22.4 kW	28.0 kW
Outdoor Air Unit	 ARXH054GTAH	 ARXH072GTAH	 ARXH096GTAH

Energy Recovery Ventilator



Energy recovery ventilator unit offers maximum comfort and greater energy savings.


Heat exchange ventilation and normal ventilation

Heat exchange ventilation

When a room is cooled or heated, the exhausted cooling / heating energy is recovered by heat-exchange ventilation.

Normal ventilation

The operation is used during periods when the room space requires no cooling or heating effect, i.e. when there is minimal temperature difference between the indoor and outdoor environments.

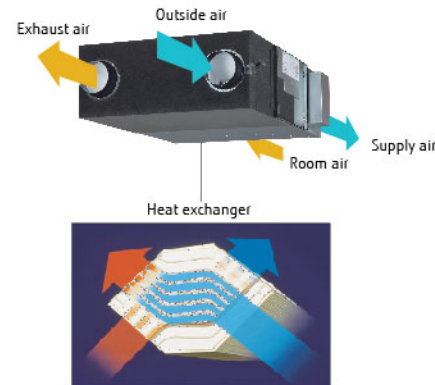


Adopts a highly efficient counter-flow heat exchange element

Energy efficiency and ecology

Energy consumption is dramatically reduced by using a counter-flow heat-exchange element. Air conditioning load is reduced by approximately 20%, resulting in significant energy savings. Recovers up to 77% of the heat in the outgoing air.

Features of heat exchange element

With the cross-flow element, air moves in a straight line across the element. With the counter-flow element, air flows through the element for a longer time (longer distance), so the heat-exchange effect improved.

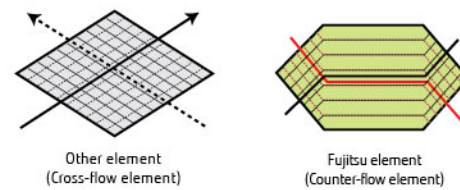

Quiet operation

Significantly reducing low pressure loss and noise allows low-noise operation.

25.5dB
(UTZ-BD035C)

Extended range of an external static pressure

An external static pressure is improved by adopting a powerful fan motor. This allows for application in a wide variety building.


Slim shape and easier installation

Counter-flow heat exchange element used for reduced noise and slimmer, more compact body shape.



Reverse mountable direct air supply / exhaust system

Adoption of straight air supply / exhaust system: Duct design is simplified because the air supply / exhaust ducts are straight. Since each unit can be mounted in reverse position, only one inspection hole is needed for two units: Two units can share one inspection hole so duct work is easier and more flexible.

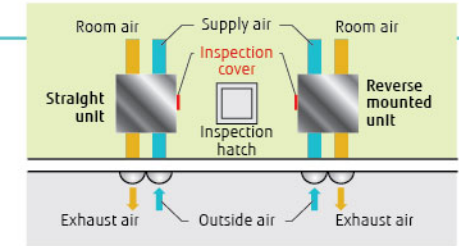

Simple remote operation

Easy operation by connecting a liquid crystal switch

- POWER ON/OFF
- Air volume High/Low
- Heat exchange/Normal Ventilation
- ON/OFF Timer
- Clean filter display



Model : UTZ-BD025C / UTZ-BD035C / UTZ-BD050C / UTZ-BD080C / UTZ-BD100C




Specifications

Rated flow rate		250 m³/h	350 m³/h	500 m³/h	800 m³/h	1000 m³/h	
Model No.		UTZ-BD025C	UTZ-BD035C	UTZ-BD050C	UTZ-BD080C	UTZ-BD100C	
Power source		220 - 240 V, 50Hz					
Heat Exchange Ventilation	Input power	(Extra high)/High/Low W	128 / 123 / 96	190 / 185 / 168	289 / 225 / 185	418 / 378 / 295	464 / 432 / 311
	Air flow rate	(Extra high)/High/Low m³/h	250 / 250 / 190	350 / 350 / 240	500 / 500 / 440	800 / 800 / 630	1,000 / 1,000 / 700
	External static pressure	(Extra high)/High/Low Pa	105 / 95 / 45	140 / 60 / 45	120 / 60 / 35	140 / 110 / 55	105 / 80 / 75
	Temperature Exchange Efficiency	(Extra high)/High/Low %	75 / 75 / 77	75 / 75 / 78	75 / 75 / 76	75 / 75 / 76	75 / 75 / 79
	Energy Exchange Efficiency Cooling	(Extra high)/High/Low %	63 / 63 / 65	66 / 66 / 71	62 / 62 / 64	65 / 65 / 68	65 / 65 / 70
	Energy Exchange Efficiency Heat pump	(Extra high)/High/Low %	70 / 70 / 72	69 / 69 / 73	67 / 67 / 69	71 / 71 / 74	71 / 71 / 76
	Sound pressure level	(Extra high)/High/Low dB*	31.5 / 30.5 / 26.5	33.0/31.0 / 25.5	37.5 / 35.5 / 32.5	37.5 / 37.0 / 34.5	38.5 / 37.5 / 34.5
Normal Ventilation	Input power	(Extra high)/High/Low W	128 / 123 / 96	190 / 185 / 168	289 / 225 / 185	418 / 378 / 295	464 / 432 / 311
	Air flow rate	(Extra high)/High/Low m³/h	250 / 250 / 190	350 / 350 / 240	500 / 500 / 440	800 / 800 / 630	1,000 / 1,000 / 700
	External static pressure	(Extra high)/High/Low Pa	105 / 95 / 45	140 / 60 / 45	120 / 60 / 35	140 / 110 / 55	105 / 80 / 75
	Sound pressure level	(Extra high)/High/Low dB*	31.5 / 30.5 / 26.5	33.0 / 31.0 / 25.5	38.5 / 38.0 / 32.5	37.5 / 37.0 / 34.5	40.5 / 39.5 / 36.5
Dimensions	W×D×H	mm	882 × 599 × 270	1,050 × 804 × 317	1,090 × 904 × 317	1,322 × 884 × 388	1,322 × 1,134 × 388
Weight	kg		29	49	57	71	83
Outlet duct diameter	mm		150	150	200	250	250
Operation range	°C		-10 to 40	-10 to 40	-10 to 40	-10 to 40	-10 to 40
Maximum humidity	%		85	85	85	85	85

* The noise level must be measured 1.5 m below the center of the unit.

Dimensions

(Unit : mm)

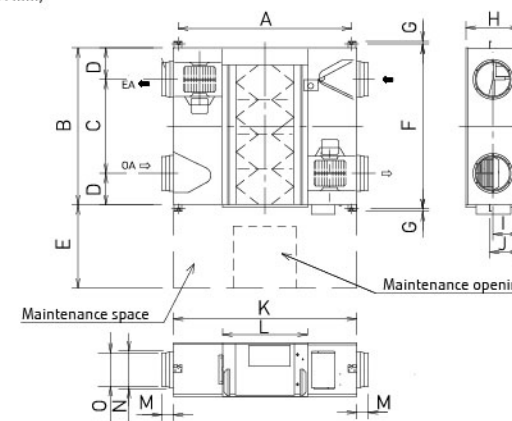


	UTZ-BD025C	UTZ-BD035C	UTZ-BD050C	UTZ-BD080C	UTZ-BD100C
A	810	978	1,018	1,250	1,250
B	599	804	904	884	1,134
C	315	580	640	428	678
D	142	112	132	228	228
E	600	600	600	600	600
F	655	860	960	940	1,190
G	19	19	19	19	19
H	270	317	317	388	388
I	135	159	159	194	194
J	159	182	182	218	218
K	882	1,050	1,090	1,322	1,322
L	414	470	470	612	612
M	95	70	70	85	85
N	Ø164	Ø164	Ø210	Ø258	Ø258
O	Ø144	Ø144	Ø194	Ø242	Ø242

DX Kit for Air Handling Application for VRF Outdoor Unit




These kits enable other manufacturers air handling units (AHU) and fan coil units (FCU) to be incorporated into a Fujitsu VRF system or, be connected to a dedicated Fujitsu VRF outdoor unit as a 1:1 system to control outside air ventilation (AHU) or room temperature (FCU).

Multiple temperature sensors optimally control the air handling unit and fan coil unit.

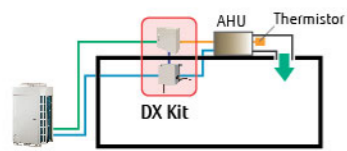


When connecting to an air handling unit, the supply air temperature is controlled by the discharge sensor.

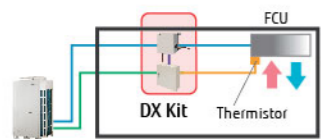


When connecting to a fan coil unit, the room temperature is controlled by the return air temperature sensor.

Arrangement as part of a VRF system

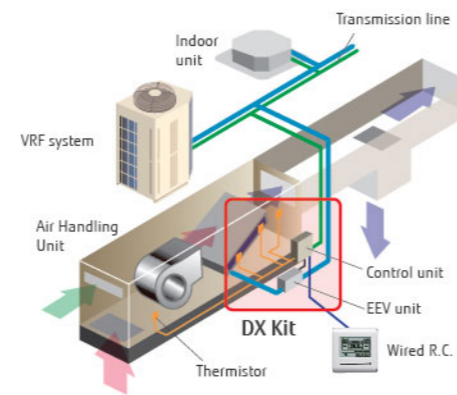


Supports a wide range of capacity classes

- 2 EEV units can be connected in parallel and up to 20 HP (50 kW) large capacity units. (Separation Tube of UTP-LX180A is required.)
- Connectable capacity range: 5 kW to 50 kW

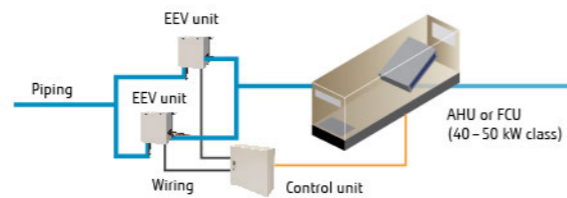


A variety of controls to match the application

Central control using our VRF controllers or central management controllers

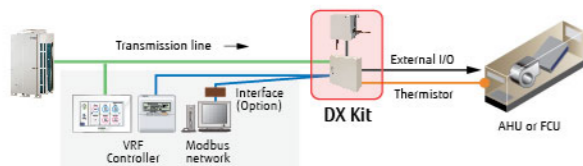

Central control from external controllers

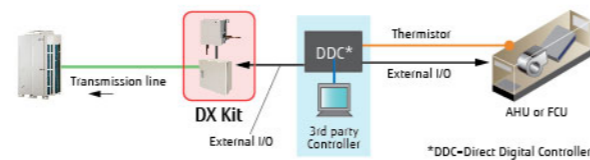

Functions Summary

Inputs

- ON/OFF
- Setting temperature
- Capacity demand
- Heating / Cooling operation mode
- Fault information

Outputs

- ON/OFF indication
- Fan ON/OFF indication
- Thermo ON/OFF indication
- Defrost indication
- Fault indication


MODBUS® Control

Possible to control via a MODBUS enabled BMS by using optional interface.

Installation Limitation

- Connectable VRF Series: All VRF Series
- Connectable DX Kit system capacity range: 50 to 100% of the outdoor unit capacity
- Connectable DX Kit system capacity range with indoor units: 30% or less of the outdoor unit capacity
- Max. wiring length from control unit: 10 m
- Max. piping length between EEV unit and indoor unit: 5 m
- Outdoor installation: Control unit (IP54 class) and EEV unit can be installed at an outdoor space.


Connectable capacity

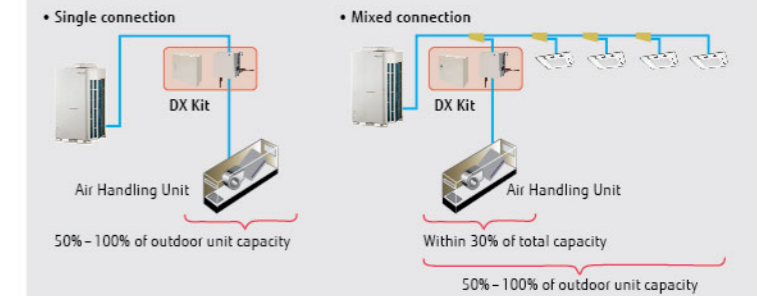


For 2 EEV units connection (option) Separation Tube: UTP-LX180A



Piping and wiring length

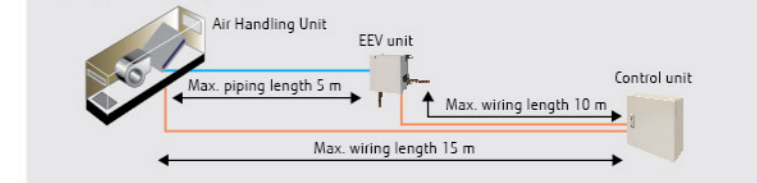

Control unit: UTY-VDGX EEV unit: UTP-VX30A / UTP-VX60A / UTP-VX90A

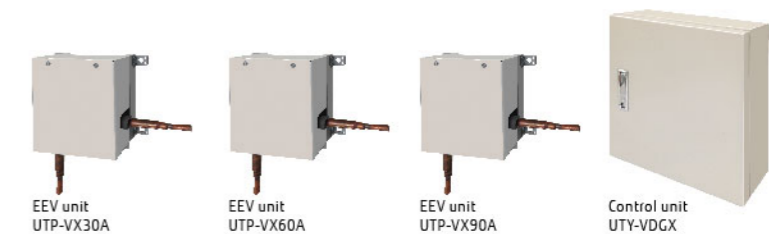

Specifications

Connectable Capacity class		5.0 kW	6.3 kW	8.0 kW	10.0 kW	12.5 kW	14.0 kW	20.0 kW	25.0 kW	40.0 kW	50.0 kW
Capacity	Cooling	5.6	6.3	8.0	10.0	12.5	14.0	22.4	25.0	40.0	50.4
	Heating	6.3	7.1	9.0	11.2	14.0	16.0	25.0	28.0	45.0	56.5

Control unit		UTY-VDGX	
Power source		230/1/50	
Dimensions (H × W × D)		400 × 400 × 120	

EEV unit		UTP-VX30A	UTP-VX60A	UTP-VX90A	UTP-VX90A×2
Connection pipe diameter (Liquid)		Ø9.53	Ø12.70	Ø12.70	Ø12.70
Dimensions (H × W × D)		160 × 220 × 90			

Note: Specifications are based on the following conditions.
Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating: Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
Pipe length: 7.5 m Voltage: 230 [V].



Outdoor Air Unit



One VRF system can provide air conditioning and air supply at the same time.

Outdoor Air Unit can be connected in a same VRF*1 system as one of indoor unit series and can create fresh and comfortable air supply together from our high advanced technology.


*1. Connectable VRF series: J-IIS, J-II, V-II, VR-II tropical
In J-II series alone, OAU is prohibit to connect under the ambient temperature of 40°C or higher.

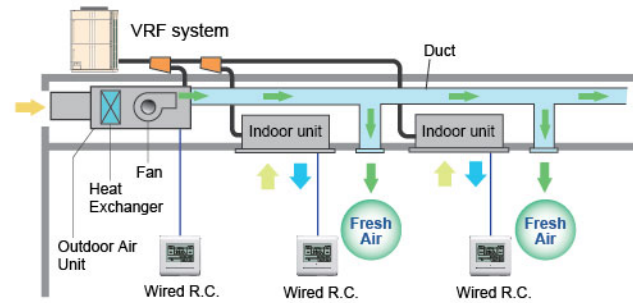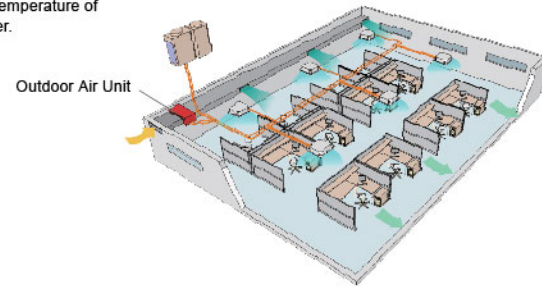

* Make sure the connected capacity is within the range of 50% to 100% of the outdoor unit capacity. In addition, if there are mixed connections with indoor units, make the Outdoor Air Unit connection capacity 30% or less of the outdoor unit capacity.

High energy savings and flexible duct design by using DC motor

- Greatly reduces electricity consumption by adopting permanent magnet compared to when using an AC motor.
- Compared with AC motor, changing the speed makes it possible to respond flexibly to the external static pressure from 50 Pa to 240 Pa. Even if damper equipment is not used, static pressure can be adjusted and duct design is easy.
- Static pressure can be set easily using wired remote controller.

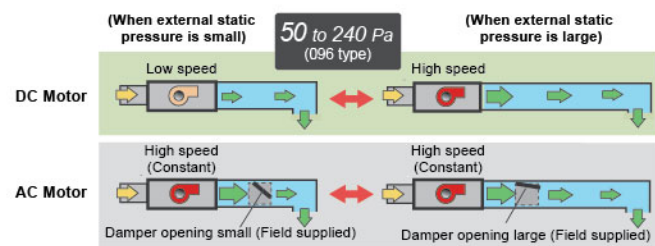

Various Controller

Supplied variety of controllers as options, such as individual controller, central controller, and building management controller.

Individual Controller



Central Controller



* The temperature setting is discharged air temperature setting. The air volume is set to a constant speed.

Top class compact design

- Top class lightweight compact design at just 425 mm in height, 55 kg in weight for ARXH072 type. This unit can be installed easily even at narrow space.



Models: ARXH054GTAH / ARXH072GTAH / ARXH096GTAH






Specifications

Rated flow rate		1000 m³/h	1500 m³/h	2000 m³/h
Model No.		ARXH054GTAH	ARXH072GTAH	ARXH096GTAH
Power source		230/1/50	230/1/50	230/1/50
Capacity	Cooling	14.0	22.4	28.0
	Heating	8.9	13.9	17.4
Input Power	Cooling / Heating	179	292	370
Airflow Rate		1,080	1,680	2,100
Static Pressure	Standard (range)	185 (50-185)	200 (50-200)	200 (50-240)
Sound Pressure Level		42	44	47
Dimensions (H x W x D)		425x1,367x572	425x1,367x572	450x1,583x700
Weight		48	55	71
Connection Pipe Diameter (Small / Large)		Ø9.52/Ø19.05	Ø12.70/Ø22.22	Ø12.70/Ø22.22
Operation Range	Cooling	5 to 43	5 to 43	5 to 43
	Heating	-7 to 21	-7 to 21	-7 to 21
Refrigerant		R410A	R410A	R410A

Note : Specifications are based on the following conditions.
Cooling : Outdoor temperature of 33°CDB / 28°CWB.
Heating : Outdoor temperature of 0°CDB / -2.9°CWB.
Pipe length : 7.5 m Voltage : 230 [V].

Dimensions (Unit : mm)

Models: ARXH054GTAH / ARXH072GTAH / ARXH096GTAH

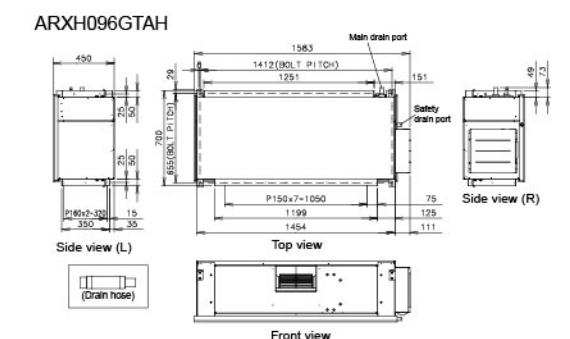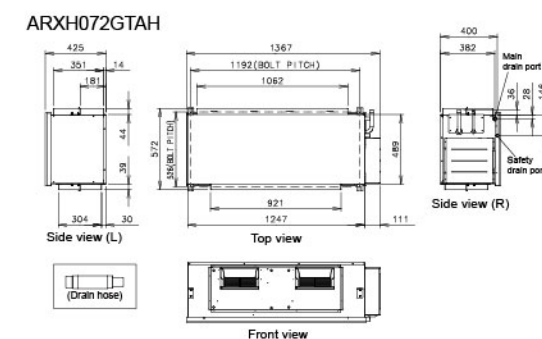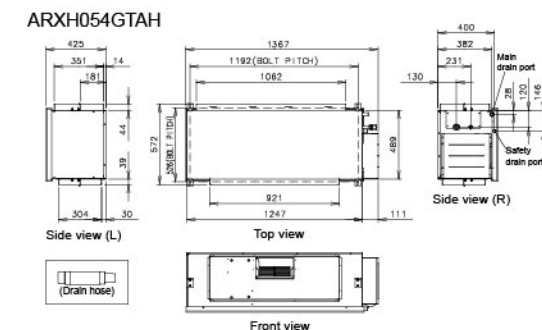

Light Commercial & Commercial, Residential CONTROL SYSTEM & OPTIONAL PARTS

- C-002 Control System Overview
- C-006 Best Control Solution for Each Property
- C-008 Comparison Table of Controllers
- C-040 Optional Parts Overview



Wide product lineup to meet a variety of needs

We can flexibly meet customer needs through a variety of offerings including wired and wireless individual remote controllers, central remote controllers that simultaneously control multiple indoor units, and a variety of convertors that link with other systems.

CONTROL SYSTEM



INDIVIDUAL CONTROL

- C-010 Wired Remote Controller (Touch Panel)
- C-011 Wired Remote Controller Compact Wired Remote Controller
- C-012 Simple Remote Controller

CONVERTOR/ADAPTOR

- C-013 MODBUS® Convertor KNX® Convertor
- C-014 Wireless LAN Interface
- C-015 External Switch Controller
- C-016 MODBUS® Interface KNX® Interface
- C-017 Wireless LAN Interface



INDIVIDUAL CONTROL

- C-023 Wireless Remote Controller IR Receiver Unit For Duct, Cassette

CENTRALIZED CONTROL

- C-025 Central Remote Controller
- C-026 System Controller Software System Controller Lite Software

CONVERTOR/ADAPTOR

- C-030 BACnet® Gateway Software
- C-031 BACnet® Gateway Hardware Network Convertor for LONWORKS®
- C-032 MODBUS® Convertor KNX® Convertor
- C-033 Signal Amplifier

-
- C-034 Control System List

OPTIONAL PARTS



- C-042 Auto Louver Grille Kit
- C-043 External Power Supply Unit

- C-044 Optional Parts List
- C-048 Function List
- C-052 Separation Tube etc.

VRF J Series

VRF V Series

Control System Overview

User's needs are supported by offering a variety of controls, such as individual control, central control and building management control options.

Air Conditioning Individual Control

- Wired Remote Controller (Touch panel)**
UTY-RNRGZ3
- Wired Remote Controller**
UTY-RLRG
- Compact Wired Remote Controller**
UTY-RCRGZ1
- Simple Remote Controller**
UTY-RSRG
UTY-RHRG
Without operation mode
- Wireless Remote Controller**
UTY-LNHG
- IR Receiver Unit**
UTB-YWC For Duct
UTY-TRHX For 1-Way Flow Cassette/3D Flow Cassette/Duct
UTY-LRHGB1 For Cassette
UTY-LBHXD For Circular Flow Cassette

Air Conditioning Centralized Control

Internet or Public Telephone Line

USB Adaptor*1 (Locally purchased)

Remote/Monitoring side

System Controller (Software)
UTY-APGXZ1/UTY-ALGXZ1 (Lite edition)

Max. Controllable indoor units
1600*2

Central Remote Controller
UTY-DCGGZ1

Max. Controllable indoor units
100

*1: USB Adaptor: Echelon® U10 USB Network Interface
*2: Lite edition is max. controllable 400 indoor units



Convertor/Adaptor For external control via BMS/Home Automation Systems

- BACnet® Gateway**
UTY-ABGXZ1 **Software**
- BACnet® Gateway**
UTY-VBGX **Hardware**
- Network Converter (For LONWORKS®)**
UTY-VLGX
- MODBUS® Converter For indoor unit**
UTY-VMSX
- MODBUS® Converter**
UTY-VMGX
- KNX® Converter For indoor unit**
UTY-VKSX
- KNX® Converter For VRF**
UTY-VKGX
- Wireless LAN Interface**
UTY-TFSXZ1
- External Switch Controller**
UTY-TERX



BMS/BAS*3

BMS*3, Home automation system

*3: BMS/BAS: Building Management System/Building Automation System

Card-key (Locally purchased)

Internet device

Convertor/Adaptor For system expansion

- Network Converter (DC power supply)**
UTY-VTGX
- Network Converter (AC power supply)**
UTY-VTGXV
- Signal Amplifier**
UTY-VSGXZ1

Best Control Solution for Each Property

Fujitsu General provides the best control solutions suitable for the various properties.

SHOP

Type	Individual Control		Centralized Control		Integrating Control (Interface)		
	Wired Remote Controller	Group Remote Controller	Central Remote Controller	System Controller	Network Converter for LONWORKS®	MODBUS® Converter	KNX® Converter
	UTY-RNRGZ3, UTY-RLRG, UTY-RVNGM, UTY-RCRGZ1	UTY-CGGG	UTY-DCCGZ1	UTY-APGXZ1, UTY-ALGXZ1	UTY-VLGX	UTY-VMGX	UTY-VKGX
Automatic control of A/C (Schedule timer, Weekly timer etc.)	●	●	●	●			
Limited control for staff (RC Prohibition, Room temp set point limitation etc.)			●	●	●	●	●
Group Control		●	●	●			
Advanced Energy Saving (Peak cut, Indoor unit rotation operation etc.)				●			
Remote Management			●	●			
Manage multiple sites			●	●			
Monitor energy consumption				●			
Control third party products				●			
Integrate FGL A/C into BMS					●	●	●














HOTEL

Type	Individual Control			Centralized Control		Integrating Control (Interface)				
	Wired Remote Controller	Simple Remote Controller	Wireless Remote Controller	Central Remote Controller	System Controller	BACnet® Gateway	Network Converter for LONWORKS®	MODBUS® Converter	KNX® Converter	External Switch Controller
	UTY-RNRGZ3, UTY-RLRG, UTY-RCRGZ1	UTY-RSRG, UTY-RHRG, UTY-RSNGM	UTY-LNHG, UTY-LNTG	UTY-DCCGZ1	UTY-APGXZ1, UTY-ALGXZ1	UTY-ABGXZ1, UTY-VBGX	UTY-VLGX	UTY-VMGX	UTY-VKGX	UTY-TERX
Local control for hotel guest	●	●	●							
Centralized A/C control for common space				●	●	●	●	●	●	
Limited control for hotel guests				●	●	●	●	●	●	
Remote Management				●	●					
Advanced Energy Saving (Peak cut, Indoor unit rotation operation etc.)					●	●				
Monitor energy consumption					●					
Control third party products					●					
Integrate FGL A/C into BMS						●	●	●	●	
Interlock with window contact										●
Interlock with key-card										●

OFFICE

Type	Individual Control			Centralized Control		Integrating Control (Interface)				
	Wired Remote Controller	Simple Remote Controller	Wireless Remote Controller	Central Remote Controller	System Controller	BACnet® Gateway	Network Converter for LONWORKS®	MODBUS® Converter	KNX® Converter	External Switch Controller
	UTY-RNRGZ3, UTY-RLRG, UTY-RCRGZ1	UTY-RSRG, UTY-RHRG, UTY-RSNGM	UTY-LNHG, UTY-LNTG	UTY-DCCGZ1	UTY-APGXZ1, UTY-ALGXZ1	UTY-ABGXZ1, UTY-VBGX	UTY-VLGX	UTY-VMGX	UTY-VKGX	UTY-TERX
Local control for office staff	●	●	●	●						
Automatic control of A/C (Schedule timer, Weekly timer etc.)	●		●	●	●	●				
Centralized A/C control for management				●	●	●	●	●	●	
Limited control for office staff (RC Prohibition, Room temp set point limitation etc.)				●	●	●	●	●	●	
Advanced Energy Saving (Peak cut, Indoor unit rotation operation etc.)					●	●				
Remote Management				●	●					
Energy Charge Apportionment					●	●				
Monitor energy consumption					●					
Control third party products					●					
Integrate FGL A/C into BMS						●	●	●	●	
Interlock with door contact										●
Interlock with human sensor for meeting room										●

Comparison Table of Controllers

Item															
Model name	UTY-RNRGZ3	UTY-RLRG	UTY-RVNGM	UTY-RCRGZ1	UTY-RSNGM	UTY-RSRG		UTY-RHRG	UTY-LNHG	UTY-LNTG	UTY-DMMGM	UTY-DCGGZ1	UTY-ALGXZ1	UTY-APGXZ1	
Max. controllable remote controller groups	1	1	1	1	1	1		1	1	1	1	100	400	1600	
Max. controllable indoor units	16	16	16	1	16	16		16	16	16	8	100	400	1600	
Max. controllable groups	-	-	-	-	-	-		-	-	-	-	50	400	1600	
Air conditioning control function	On / Off	●	●	●	●	●		●	●	●	●	●	●	●	
	Operation mode setting	●	●	●	●	●		-	●	●	●	●	●	●	
	Fan speed setting	●	●	●	●	●		●	●	●	●	●	●	●	
	Room temp. setting	●	●	●	●	●		●	●	●	●	●	●	●	
	Room temp. set point limitation	●	●	●	-	-		●	-	-	-	●	●	●	
	Test operation	●	●	●	●	●		●	●	●	-	-	-	-	
	Up/down air direction flap setting	●	●	●	●	-		●	●	●	-	●	●	●	
	Right/left air direction flap setting	●	●	●	●	-		-	●	-	-	-	●	●	
	Individual louver control	●	-	-	●	-		-	-	-	-	-	●*3	-	
	Group setting	-	-	-	-	-		-	-	-	-	-	●	●	
	RC prohibition	-	-	-	-	-		-	-	-	-	●	●	●	
	Anti freeze setting	●	-	-	●	-		-	-	-	-	●	●	●	
	Set temp. auto return	●	●	●	-	-		-	-	-	-	-	-	-	
	Economy mode setting	●	●	●	●	-		-	●	●	●	●	●	●	
	Human sensor control	●	-	-	-	-		-	-	-	-	●	-	●	
Display	Error	●	●	●	●	●		●	-	-	●	●	●	●	
	Defrosting	●	●	●	●	●		●	-	-	-	●	●	●	
	Current time	●	●	●	-	-		-	●	●	●	●	●	●	
	Day of week	●	●	●	-	-		-	-	-	-	●	●	●	
	R.C. prohibition	●	●	●	●	●		●	-	-	●	●	●	●	
	Address display	●	●	●	●	●		●	-	-	-	-	●	●	
	Room temp	●	-	●	●	-		●	-	-	-	-	●*4	●*4	
	Multi language	●	-	●	-	-		-	-	-	-	●	●	●	
	Summer time	●	-	●	-	-		-	-	-	-	●	●	●	
	Name registration	●	-	-	-	-		-	-	-	-	●	●	●	
	Backlight	●	-	●	●	●		●	-	-	●	●	-	-	
	2D floor layout / 3D building display	-	-	-	-	-		-	-	-	-	-	-	●	
	Refrigerant leakage detection function	-	-	-	-	-		-	-	-	-	●	●	●	
	Timer	Schedule timer	Week	Week	Week	-	-		-	-	-	Week	Week	Year	Year
		On/off timer	8	4	8	-	-		-	-	-	4	20	144	144
Sleep timer		●	●	●	●(OFF only)	-		-	●	●	-	-	-	-	
Program timer		-	-	-	-	-		-	●	●	-	-	-	-	
Auto off timer		●	●	●	-	-		-	-	-	-	●	-	-	
Day off		●	●	●	-	-		-	-	-	●	●	●	●	
Min. unit of timer setting (Minutes)		10 • 30	30	30	-	-		-	5	5	5	10	10	10	
Control	Status monitoring system	-	-	-	-	-		-	-	-	-	●	●	●	
	Electricity charge apportionment	-	-	-	-	-		-	-	-	-	-	○	●	
	Error history	●	●	●	-	-		-	-	-	-	●	●	●	
	Emergency stop	-	-	-	-	-		-	-	-	-	●*2	-	-	
	Remote management	-	-	-	-	-		-	-	-	-	●	○	●	
	Energy saving management	-	-	-	-	-		-	-	-	-	-	○	○	
	E-mail notification for malfunction	-	-	-	-	-		-	-	-	-	●	●	●	
Key lock	● Child lock	● Child lock	● Child lock	-	-		-	-	-	-	● Child lock	● Password setting	● Password setting	● Password setting	
Low noise mode	-	-	-	-	-		-	-	-	-	●	●	●		

*1 "Operation mode" setting is not available for this model. *2 This function is available only through external input control. *3 Only individual airflow batch reset is mounted. *4 This function is available only when using wired remote controller.
 ●: Supported ○: Optional function - : Not supported yet

Wired Remote Controller (Touch Panel)

UTY-RNRGZ3



Easy operation by high-definition large STN-LCD touch panel screen

- Easy finger touch operation with LCD panel
- Built-in weekly/Daily timer (ON/OFF, Temp., Mode)
- Backlight enables easy operation in a darkened room
- Room temperature display
- Control up to 16 indoor units
- Corresponds to 12 different languages (English, Chinese, French, German, Spanish, Russian, Polish, Italian, Greek, Portuguese, Turkish and Dutch)
- 2-wire type

Max. Controllable
16 indoor units

Max. Controllable
1 Group

High performance and compact size

In addition to the individual control, weekly timer, and various energy saving controls can be realized using one remote controller only.



Accurate and comfortable control

Indoor temperature can be detected accurately by the inclusion of a thermo sensor in the body of the wired controller.




Various energy saving control

Custom Auto

- Maintains 2 separate set points for heating and cooling.
- Automatically changes mode between heating and cooling.


* This function is not available for some models.

Cooling set temp. 27°C, Heating set temp. 26°C

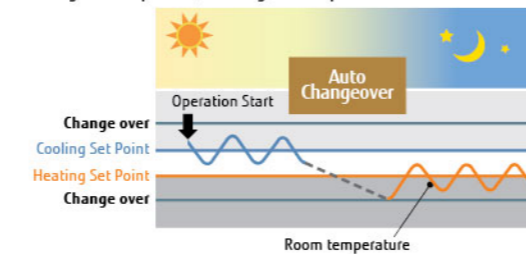

Auto OFF timer

- The indoor unit automatically is turned off when it reaches to the preset operating time frame.
- The time frame of the "Auto off timer" can be flexibly scheduled.
- Can be set off time 30 to 240 minutes

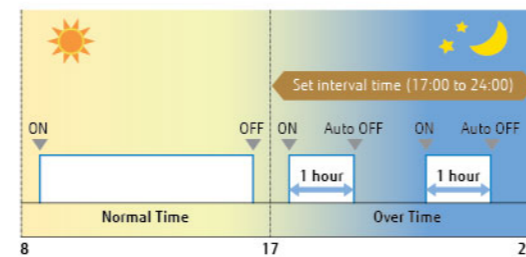

Ex.) At interval time hour (17:00 to 24:00) to prevent forgetting to turn off
Set off time : 1 hour

2 schedules Weekly Timer

Set Temperature Auto Return

Set Temperature Upper and Lower Limit Setting

Specifications

Model name	UTY-RNRGZ3
Power Source	DC 12 V
Dimensions (H × W × D) (mm)	120 × 120 × 20.4
Weight (g)	220

DC 12 V is supplied by the indoor unit.

Wired Remote Controller

UTY-RLRG



- Various timer setup (ON / OFF / WEEKLY) are possible.
- The room temperature can be controlled by detecting the temperature accurately with Built-in thermo sensor.
- When a failure occurs, the error code is displayed.
- Error history. (Last 16 error codes can be accessed.)
- 2-wire type

Max. Controllable
16 indoor units

Max. Controllable
1 Group


High performance and compact size

In addition to the individual control, weekly timer, and various energy saving controls can be realized using only one remote controller.



High visibility and easy operation

- "Mode", "Set Temp", and "Fan" are displayed at large size on the top screen.
- Each function to be set is indicated by an icon.
- Control guide is displayed and operation is simple and straightforward.

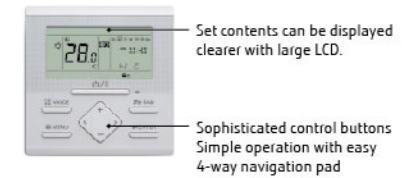

Compact Wired Remote Controller

UTY-RCRGZ1



NEW




- Simple design to match the stylish interior
- Easy to install : Body of controller is designed to fit in European standard junction box
- Can be operated both by wireless and wired remote controller.
- 2-wire type

Large screen and simple display

- Although the size is compact, the screen is large
- Large letters makes it easy to see
- Operation is simple and easy-to-understand


Max. Controllable
1 single indoor units

Max. Controllable
1 Group

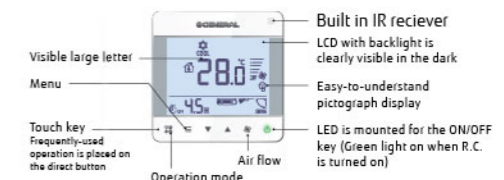


System overview

VRF connection

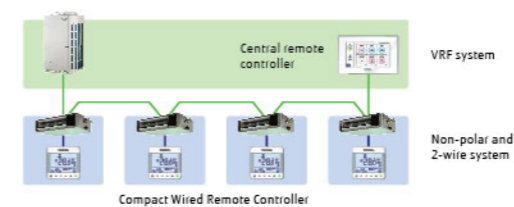

RAC connection




Specifications

Model name	UTY-RLRG	UTY-RCRGZ1
Power Source	DC 12 V	DC12V
Dimensions (H × W × D) (mm)	120 × 120 × 17	86 × 86 × 44
Weight (g)	170	135

DC 12 V is supplied by the indoor unit.

Simple Remote Controller

UTY-RSRG / UTY-RHRG (Without operation mode)

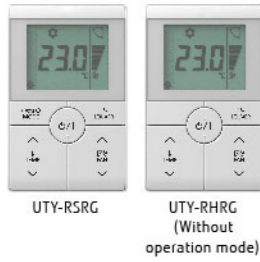


Compact remote controller provides access to basic functions

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Stylish design: Simple design to match the stylish interior.
- Large LCD screen & simple operation buttons
- Backlight: White colored backlight on monitor enable easy operation in dark.
- 2-wire type

Max. Controllable
16 indoor units
Max. Controllable
1 Group


Corresponding to various applications

- **Vertical louver control:** Vertical air flow direction can be adjusted for Duct types with auto louver and Cassette types, which are installed in hotels and conference rooms, can be adjusted.
- **Room temperature set point limitation:** The Simple Remote Controller can manage to energy saving operation in small buildings without the central control unit.
- **Built in room temperature sensor:** The Simple Remote Controller detects actual room temperature and controls room climate accuracy.

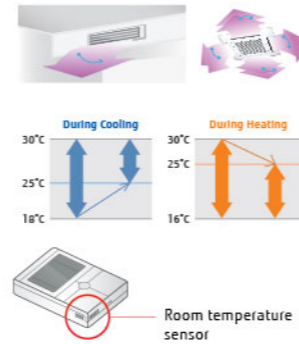

Simple Remote Controller

UTY-RSNGM, UTY-RSKG/UTY-RHKG (Without operation mode)

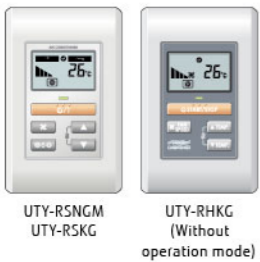

Compact remote controller provides access to basic functions

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Backlight enables easy operation in a darkened room.
- 3-wire type

Max. Controllable
16 indoor units
Max. Controllable
1 Group

Easy-to-use operation

- Provides access to basic operations, such as Start / Stop, Fan control, Operation mode switching, and Room temperature setting.
- A large On / Off button is provided in the centre of the remote controller for easy operation.
- Can be used jointly with other individual control unit.
- Following an error display, diagnostics can be carried out on the controller.

Specifications

Model name	UTY-RSRG	UTY-RHRG	UTY-RSNGM, UTY-RSKG	UTY-RHKG
Power Source	DC 12 V	DC 12 V	DC 12 V	DC 12 V
Dimensions (H × W × D) (mm)	120 × 75 × 19.4	120 × 75 × 19.4	120 × 75 × 19.4	120 × 75 × 14
Weight (g)	120	120	120	90

DC 12 V is supplied by the indoor unit.

MODBUS® Convertor for Indoor Unit


UTY-VMSX



Max. Connectable
1 Single indoor unit

The MODBUS Convertor allows a complete integration of air conditioners into MODBUS Networks.

- Simple installation due to small and compact size.
- No separate external power supply required.
- The MODBUS Convertor must be connected one by one in the indoor unit.
- The MODBUS Controller permits central monitoring and control of air conditioners from BMS/Central/Home Controller.

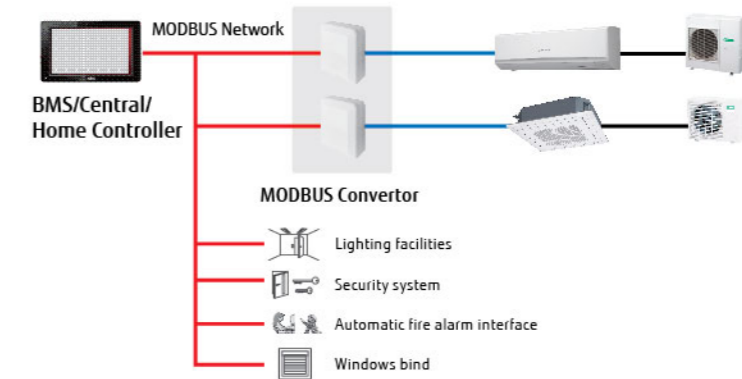

Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed setting
- Louver position (Airflow direction setting)
- Room temperature setting and display
- Economy mode setting
- Error status

Easy Installation

Flexible installation locations with neat wirings are feasible since no power supply cable is used in the convertor.



KNX® Convertor for Indoor Unit


UTY-VKSX



Max. Connectable
1 Single indoor unit

KNX Convertor is useful for individual control of indoor.

- New KNX Convertor enables to connect central/home controller and Fujitsu General indoor unit.
- Compact and light weight design

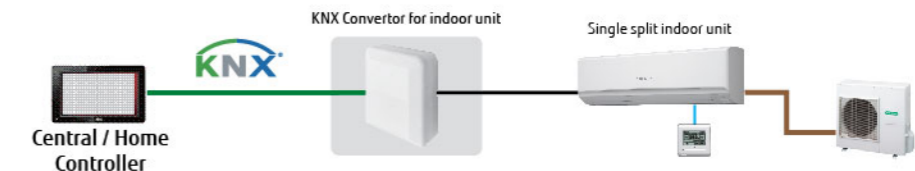

Specifications

Model name	UTY-VMSX
Power supply	DC 12 V
Input Power (W)	Max. 1.2
Dimensions (H×W×D)(mm)	140 × 117 × 43
Weight (g)	200
Maximum Connectable indoor unit number per 1 MODBUS Convertor	1

Modbus communication specifications

Transfer mode	RTU mode
Communication speed	9600/19200bps
Data bit	8
Parity	even/odd/none
Stop bit	1/2 (no parity)
Network	RS485
Maximum cable length	1000m (3280 ft)

Model name	UTY-VKSX
Power supply	DC 12 V
Power consumption (W)	0.6
Dimensions (H×W×D)(mm)	140 × 117 × 43
Weight (g)	215

Wireless LAN Interface

UTY-TFNXZ1 / UTY-TFSXZ1, UTY-TFSXW1, UTY-TFSXF2




USB type for single split models
UTY-TFSXF2



UTY-TFNXZ1
UTY-TFSXZ1


Max. Connectable
1 Single indoor unit

- It is the most advanced solution to remotely manage an Air Conditioning system using all sort of mobile devices such as Smartphones, and tablets.
- No separate external power supply required
- Can be used for single indoor units and multi system indoor units

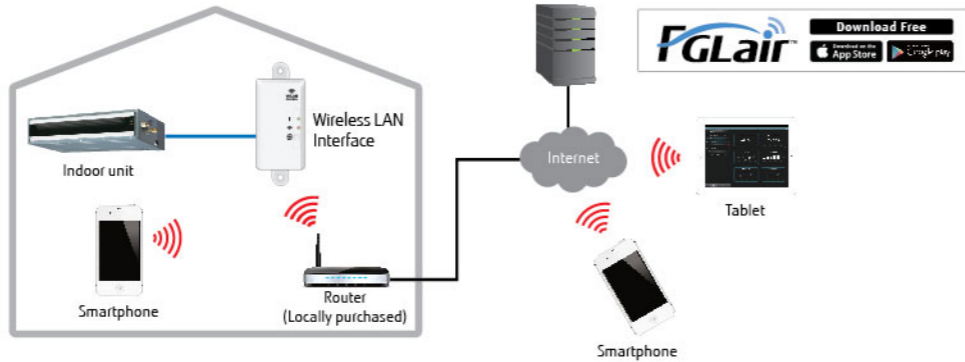


Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed setting
- Louver position (Airflow direction setting)
- Timer operation setting (Weekly timer)
- Economy mode setting

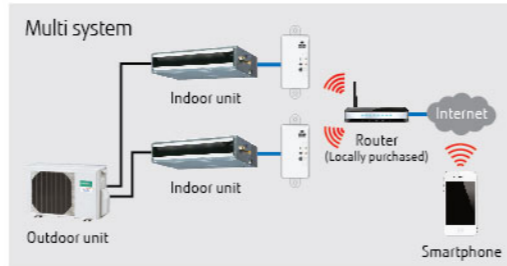


Multiple air conditioning management

- Multiple air conditioning management at difference locations.

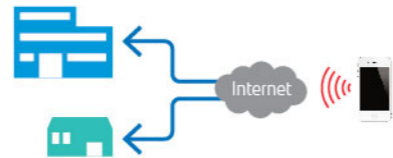

Error display & E-mail notification

- Alerts e-mail notification
- Air conditioning malfunction display
- It enables rapid service response when error occurs.

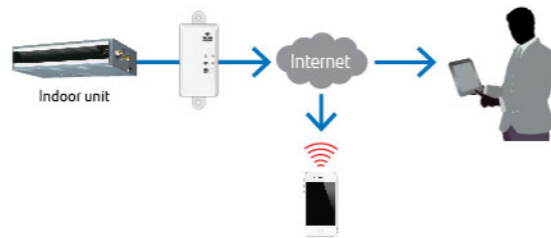

Wireless LAN Interface (USB type) UTY-TFSXF2

New compact USB type is available. Specialized installation work is not required and it can be installed to indoor unit easily.



Specifications

Model name	UTY-TFNXZ1 / UTY-TFSXZ1	UTY-TFSXW1	UTY-TFSXF2
Dimensions (H × W × D) (mm)	71 × 38 × 15	71 × 38 × 15	56.7 × 34 × 9.72
Weight (g)	35	35	30

External Switch Controller

UTY-TERX



Max. Controllable
1 group


Air conditioner switching can be controlled by connecting other sensor switches

- In combination with a field supply Card-Key Switch or other sensor, the External Switch Controller allows control of the ON / OFF, Room temperature, Fan speed and Master control functions. This makes this product suitable for installations such as hotel rooms.
- Card-key or other sensor switches are available as a locally purchased parts.
- The set temperature can be specified at two points for cooling and heating individually (4 points).



Installation example

Human sensor catches movements of people in a room, and operates with lower capacity when people come back to the room, it automatically returns to previous operation mode.

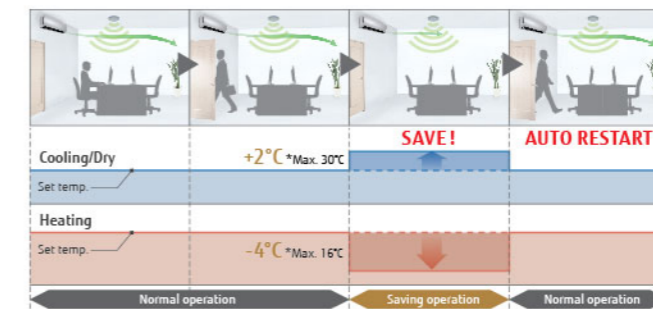

Human sensor equipment needs to be purchased locally. Human sensor is not mounted on the External Switch Controller.



Specifications

Model name	UTY-TERX
Power Supply	DC 6.5-16 V
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	250

DC 12 V is supplied by the indoor unit.

MODBUS® Interface


FJ-RC-MBS-1



The MODBUS Interface allows a complete integration of air conditioners into MODBUS Networks.

- Simple installation due to small and compact size.
- No separate external power supply required.
- The MODBUS Interface permits central monitoring and control of air conditioners from BMS.

Max. Connectable
1 Single indoor unit
Max. Controllable
1 Group

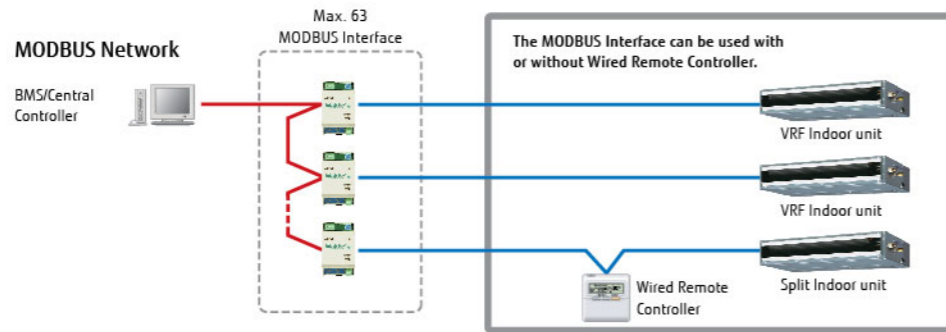

KNX® Interface


FJ-RC-KNX-11



The KNX Interface allows a complete integration of air conditioners with KNX Network systems.

- Simple installation due to small and compact size.
- No separate external power supply required (just KNX bus power).
- Can be used for single indoor unit and group controlled (up to 16) indoor units.

Max. Connectable
1 Single indoor unit
Max. Controllable
1 Group

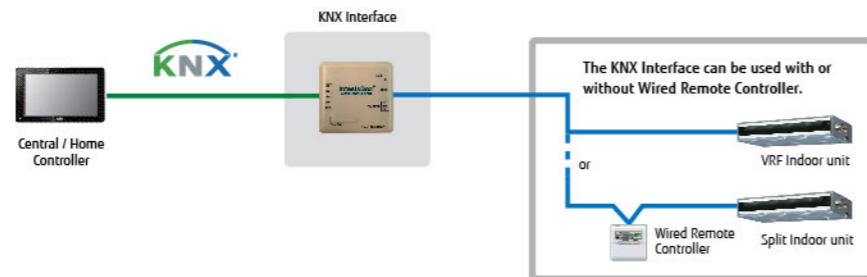

Specifications

Model name	FJ-RC-MBS-1	FJ-RC-KNX-11
Dimensions (H × W × D) (mm)	93 × 53 × 58	70 × 70 × 28
Weight (g)	85	70

Wireless LAN Interface


FJ-RC-WIFI-1



IntesisHome®

- It is the most advanced solution to remotely manage an Air Conditioning system using all sort of mobile devices such as Smartphones, Tablets and PC
- No separate external power supply required
- Can be used for single indoor unit and group controlled (up to 16) indoor units

Max. Connectable
1 Single indoor unit
Max. Controllable
1 Group

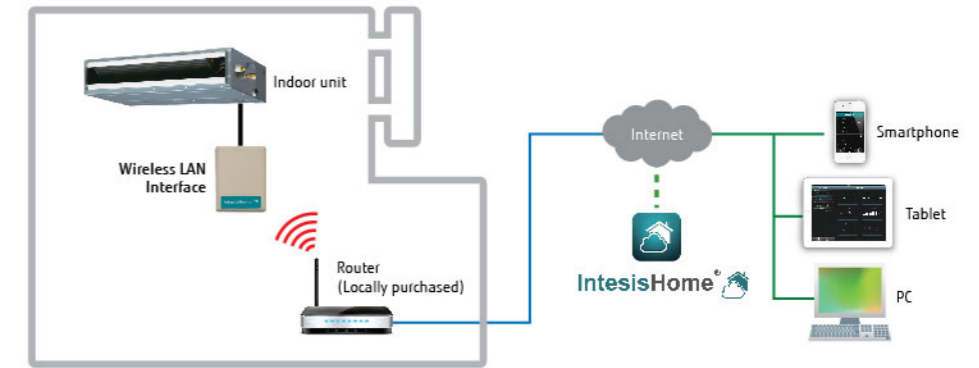

Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed setting
- Louver position (Airflow direction setting)
- Room temperature display
- Set temperature control
- Multi Language
- One Scene and Timer



(Application screen image)

Advanced control (Optional functions)

- Climate working modes (ECO, Comfort, Powerful) (future release)
- Schedule functions (ON/OFF, Modes, Set point temperature, Fan Speed, Louver position)
- Set temperature limitation (future release)
- Multiple Scenes & Timers and Calendar function

Notifications and history

- Alerts e-mail notification (future release)
- Air conditioning malfunction alerts
- Connectivity monitoring and alerts
- History (future release)

Specifications

Model name	FJ-RC-WIFI-1
Dimensions (H × W × D) (mm)	108 × 70 × 28
Weight (g)	80

Wireless Remote Controller

UTY-LNHG



Simple and sophisticated operations with a choice of 4 daily timers

- A single controller controls up to 16 indoor units.

Built-in timers

4 timer programs: On / Off / Program / Sleep
 Program timer: Operates ON/OFF timer once within 24 hours
 Sleep timer: Corrects the set temperature automatically during sleep time

Easy installation and operation

Code selector switch prevents indoor unit mix-up (up to 4 codes)
 Wide and precise transmitting range


Max. Controllable
16 indoor units

Max. Controllable
1 Group

Selectable
4 daily timers

IR Receiver Unit for Duct

UTB-YWC, UTY-TRHX

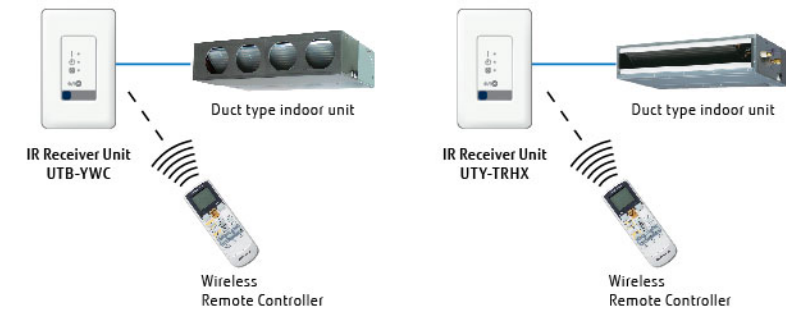

Duct type* indoor units can be controlled with Wireless Remote Controller

*Only Large Airflow Duct can not be connected to IR Receiver Unit.

*The wireless remote controller (Model: UTY-LNHG) is necessary separately

IR Receiver Unit for Cassette

UTY-LRHGB1, UTY-LBHxD, UTY-TRHX



Cassette type indoor unit can be controlled with Wireless Remote Controller

*The wireless remote controller (Model: UTY-LNHG) is necessary separately

Specifications

Model name	UTY-LNHG	UTB-YWC	UTY-LRHGB1	UTY-LBHxD	UTY-TRHX
Battery	1.5 V (R03 / LR03 / AAA)×2	DC 5 V	DC5V	DC5V	DC 5 V
Dimensions (H × W × D) (mm)	170 × 56 × 19	145 × 90 × 30	193.9 × 193.9 × 31.2	193.9 × 193.9 × 31.2	145 × 90 × 30
Weight (g)	85	150	140	140	150

DC 12 V is supplied by the indoor unit.

Central Remote Controller

UTY-DCGGZ1



For small- and medium-sized buildings and tenants


- Individual control and monitor of 100 indoor units
- 7.0inch TFT color screen
- High visibility and easy operation
- Supports 12 different languages (English, Spanish, German, French, Italian, Russian, Portuguese, Turkish, Polish, Greek, Dutch, Chinese)

Max. Controllable
100 indoor units

Max. Controllable
50 groups


Easy operation

- The new central remote controller realized an intuitive operation feeling by touch panel operation.
- All functions can be accessed from the top display and the following operations are displayed at pop-up window.

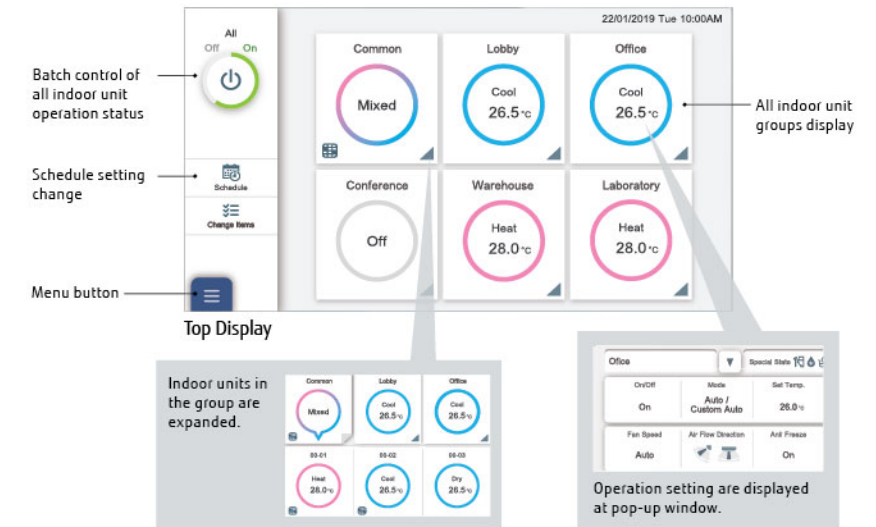

Trouble support function

Display error details
 Display descriptive explanation when an error occurs

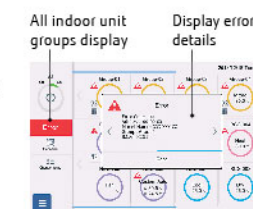

Sensor value monitoring function
 Monitor sensor data of indoor unit / outdoor unit, send mail


Notify room temperature by email*
 Notify by e-mail when the temperature around the air conditioner is too high or too low

*:This function is available only when using wired remote controller.

Remote monitoring / Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere.

- Example
- Control / Monitoring Fujitsu air conditioner
 - Error notification by E-mail

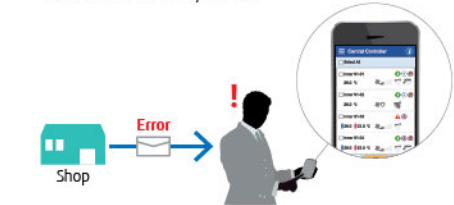

Specifications

Model name	UTY-DCGGZ1
Power Supply	100-240 V 50/60 Hz
Dimensions (H × W × D) (mm)	134.6 × 216.2 × 37.9
Weight (g)	800

System Controller

UTY-APGXZ1 (Software)

Max. Controllable
4 VRF network system

Max. Controllable
400 outdoor units

Max. Controllable
1,600 indoor units

System Controller realizes the advanced integrated monitoring & control of VRF network system from small scale buildings to large scale buildings.

- Up to a maximum of 4 VRF network systems, 1600 indoor units, and 400 outdoor units can be controlled.
- In addition to air conditioning precision control function, central remote control, electricity charge calculation, schedule management, and energy saving functions are strengthened and building manager and owner needs are met.
- Corresponds to 7 different languages (English, Chinese, French, German, Spanish, Russian, Polish)



System Controller Lite

UTY-ALGXZ1 (Software)

Max. Controllable
1 VRF network system

Max. Controllable
100 outdoor units

Max. Controllable
400 indoor units

System Controller Lite has standard functions sufficient for air conditioner management in small and medium scale buildings.


- Up to a maximum of 1 VRF network system, 400 indoor units, and 100 outdoor units can be controlled.
- In addition to air conditioning precision control function, a variety of management software is available as an option to give customers a wide range of choice.
- Corresponds to 7 different languages (English, Chinese, French, German, Spanish, Russian, Polish)



High visibility and Easy operation

Click & Operate: The property is shown visually from the perspective most suitable for operation and operated accordingly (Click & Operate). You can select from among the 4 displays of site, building, floor, or list.

Freely define groups for batched control: Indoor units can be freely grouped for simple batched control from a tree menu. Grouping by hierarchal structure, such as by section, division or department is possible.

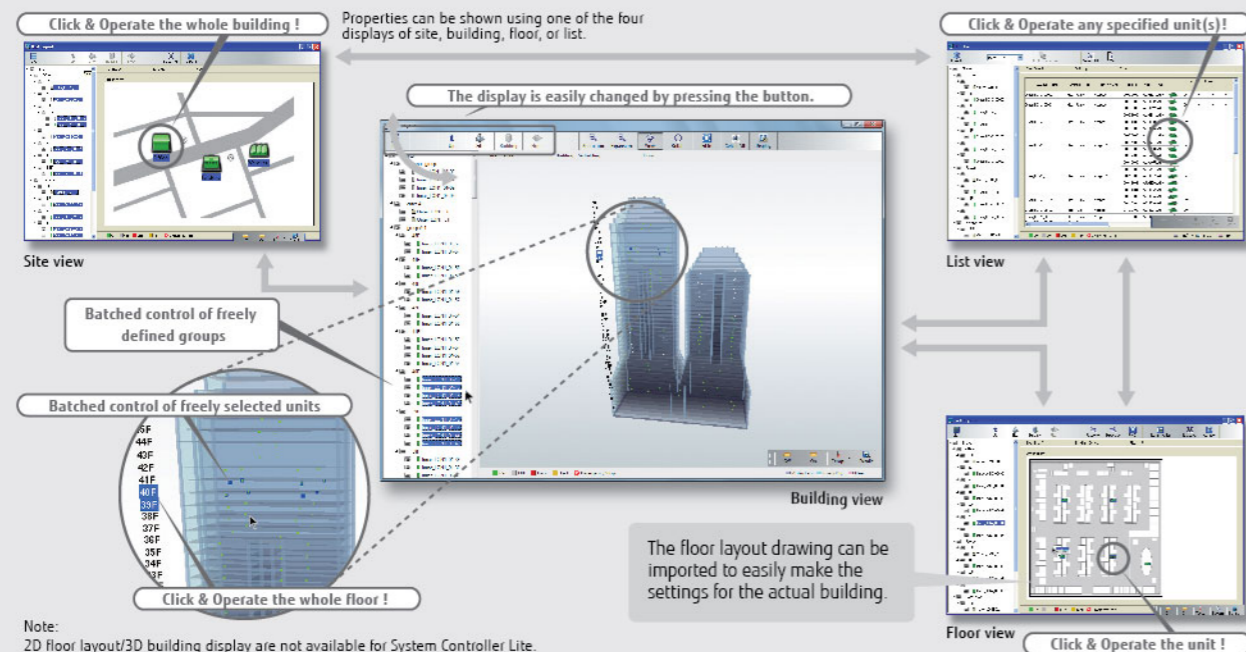


Note: 2D floor layout/3D building display are not available for System Controller Lite.

Features: System Controller/System Controller Light

3rd party devices connected by Modbus can be controlled.

Standard for System Controller Option for System Controller Lite UTY-PLGXX2

When Modbus Adaptor (locally purchased) is connected to PC, the electric facilities supported by Modbus can be controlled centrally. Wasteful electricity charge by forgetting to turn off and patrol activities can be reduced in the entire building.

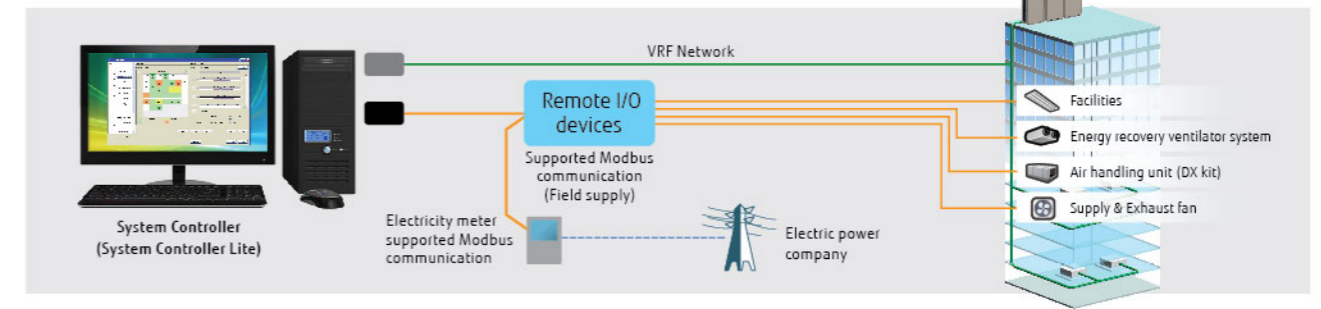

Diverse operation management & Data management

Standard for System Controller and System Controller Lite

Schedule management

- Annual schedules can be set for each remote controller group / user defined group.
- Start / stop, operating mode, remote controller prohibition, and temperature settings can be set up to 143 times per day at 10 minute intervals for up to 101 configurations for each remote controller group.
- Settings can be made for periods straddling midnight.
- Allows programming of special settings for holidays, including public holidays, for a complete year.
- Low noise operation of outdoor unit can be scheduled.

Diverse control of indoor unit and outdoor unit

- Indoor unit operation state, operation mode, etc. are displayed
- Indoor unit start / stop and operation mode switching
- Room temperature set point limitation
- Outdoor unit low noise setting

Remote controller prohibition

This prohibits changes to the operation mode, temperature, start/stop, etc.

Error display & E-mail notification

Error is notified with popup message, audible sound and E-mail real time when error occurs. Errors for the past 1 year are logged and can be reviewed later.

Operating & control record


Displays the history of operation status and control.

Data base import/export

Imports/exports registration data, layout data, and image data. Only the administrator can make this setting.

Automatic clock adjustment

The time setting of each controller can be set in batch automatically.

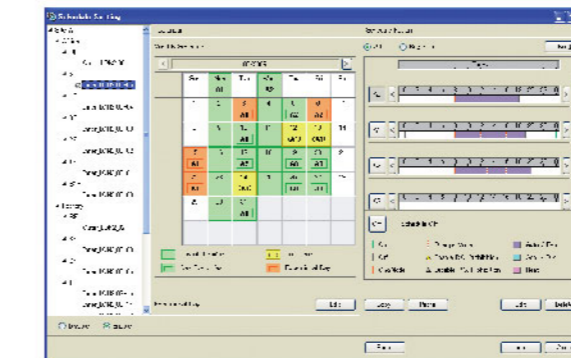


Electricity charge apportionment

Standard for System Controller
Option for System Controller Lite UTY-PLGXA2

Electricity charge apportionment calculation framework

Suppose you want to find the power consumed by the air conditioners of each tenant from the electricity charge for each month. With electricity charge apportionment function, used energy apportionment ratio will be provided, calculating in detail the energy consumed by the units used by each tenant. This information is then used to calculate the charges for the electricity consumed by each tenant from the total electricity charges in the bill from the electric power company. (See figure at right)

The detailed calculation takes into consideration such things as unused rooms and nighttime electricity charges and shows them in a charges calculation sheet.

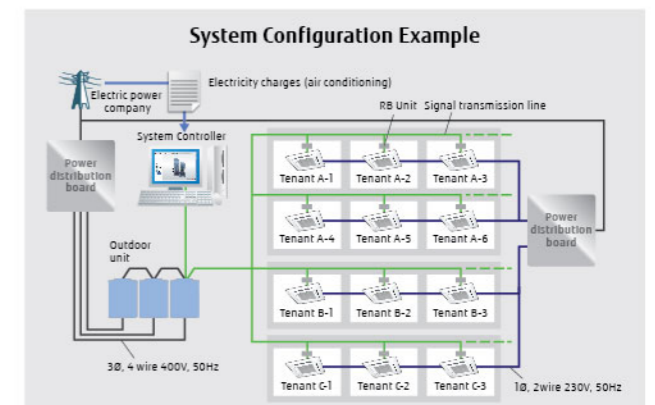


Features: System Controller/System Controller Light

Remote management


- Standard for System Controller
- Option for System Controller Lite UTY-PLGXR2

System Controller may be used on site or remotely over various networks for remote central control. System Controller requires 2 software working together. VRF Controller runs on site and communicate with VRF system. VRF Explorer runs remotely and provides user interface and communicate with the VRF Controller. VRF Controller and VRF Explorer program may run in a single PC or in different PCs separated by network. By using VRF Explorer software, one PC can perform central control of 10 VRF system sites with max. 20 buildings per site.

On site central control

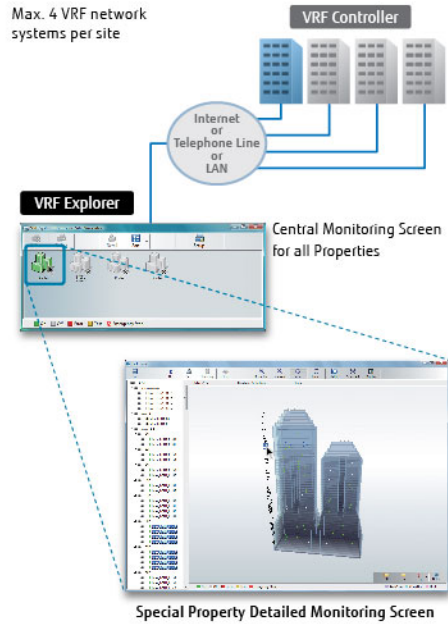


Remote central control

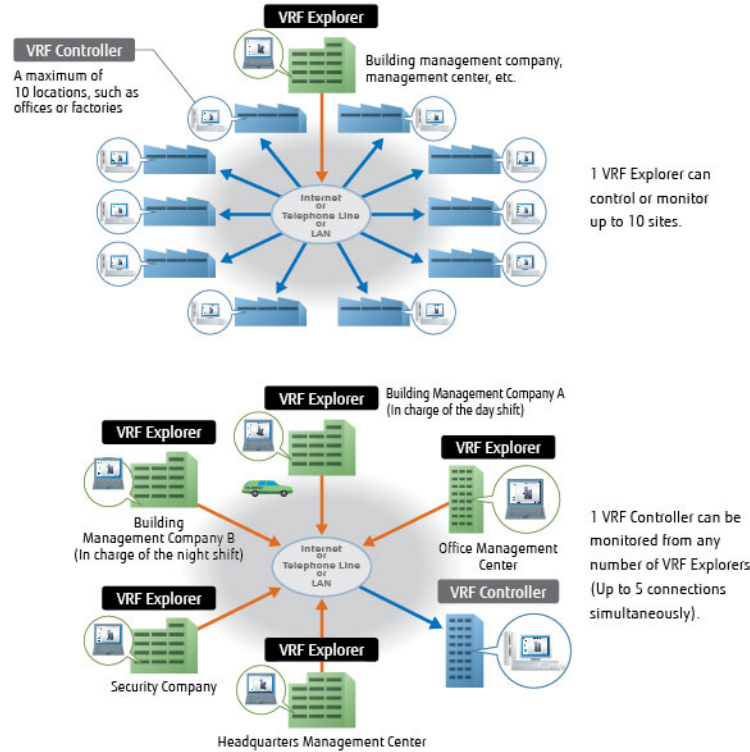

Energy saving management

- Option for System Controller UTY-PEGXZ1
- Option for System Controller Lite UTY-PLGXE2

A variety of energy saving operations can be set and managed depending on the season, weather, and time period. Excellent energy saving operation is performed while keeping users comfortable.

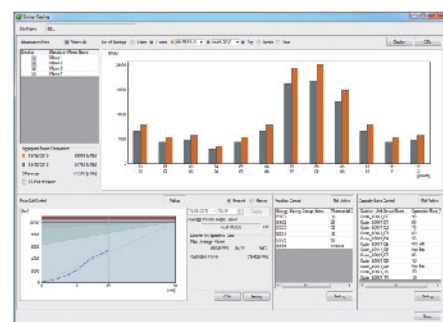

Energy Saving Management Main Screen

Energy saving graph data: This graph compares the electricity consumption with the previous month and previous year to make it easy to analyze the energy saving effect.

Indoor unit rotation operation

The operation of indoor units can be automatically rotated within a group in accordance with the set annual schedule to reduce power consumption while maintaining comfort. The indoor unit operation stoppage rate can be selected.

Peak cut operation

A power meter is connected to detect the total power consumption while shifting the indoor unit set temperature, set the indoor unit forced thermostat off, and taking other measures to carefully control the power consumed while maintaining comfort and conducting control to maintain the target power consumption set for each time. The indoor units to be controlled can be freely grouped and the control level can be set.

Outdoor unit capacity save

Outdoor unit capacity save switches the outdoor unit capability upper limit to suppress power consumption during hot summers and cold winters by averaging the power saving effect of each refrigerant system. You can select from 50% or more of the capacity upper limit.

FUNCTIONS SUMMARY

Function	Type	System controller		System controller lite					
		UTY-APGXZ1	Option UTY-PEGXZ1	UTY-ALGXZ1	Option UTY-PLGXR2	Option UTY-PLGXA2	Option UTY-PLGXE2	Option UTY-PLGXX2	
System specification	Max. VRF networks supported	4	—	1	—	—	—	—	
	Max. indoor unit / remote controller groups per VRF network	400	—	400	—	—	—	—	
	Max. outdoor units per VRF network	100	—	100	—	—	—	—	
	Max. indoor units / remote controller groups per System controller	1600	—	400	—	—	—	—	
Site supervision	Max. outdoor units per System controller	400	—	100	—	—	—	—	
	Multi site display	10	—	10	—	—	—	—	
	Number of building / 1 site	20	—	—	—	—	—	—	
	Number of floor per 1 site	200	—	—	—	—	—	—	
	Number of floor per 1 building	50	—	—	—	—	—	—	
	3D graphical layout view	●	—	—	—	—	—	—	
	2D graphical layout view	●	—	—	—	—	—	—	
Error management	List display	●	—	●	—	—	—	—	
	Tree display	●	—	—	—	—	—	—	
	Group display	●	—	—	—	—	—	—	
History	Error notification	●	—	●	—	—	—	—	
	Audible alarm	●	—	●	—	—	—	—	
	Error e-mail notification	●	—	●	—	—	—	—	
Operation control	Error history	●	—	●	—	—	—	—	
	Operation history	●	—	●	—	—	—	—	
	Control history	●	—	●	—	—	—	—	
	Individual control	On/Off	●	—	●	—	—	—	—
		Operation mode*	●	—	●	—	—	—	—
		Room temperature	●	—	●	—	—	—	—
		Fan speed	●	—	●	—	—	—	—
		Air flow direction	●	—	●	—	—	—	—
		Economy mode	●	—	●	—	—	—	—
		Room temperature set point limitation	●	—	●	—	—	—	—
		Antifreeze	●	—	●	—	—	—	—
		Outdoor unit low noise setting	●	—	●	—	—	—	—
		Remote control prohibition setting	●	—	●	—	—	—	—
	Individual management	Temperature upper and lower limit setting	●	—	●	—	—	—	—
Filter sign reset		●	—	●	—	—	—	—	
Other	Memory operation	●	—	●	—	—	—	—	
	Pattern operation	●	—	●	—	—	—	—	
Schedule	Annual Schedule	●	—	●	—	—	—	—	
	Special day setting	●	—	●	—	—	—	—	
	On / off per day	72	—	72	—	—	—	—	
	On / off per week	504	—	504	—	—	—	—	
	Day off	●	—	●	—	—	—	—	
Remote management	Min. unit of timer setting (Minutes)	10	—	10	—	—	—	—	
	Low noise mode Weekly schedule	●	—	●	—	—	—	—	
	Web Operation	●	—	●	—	—	—	—	
	Remote monitoring	●	—	●	—	—	—	—	
Electricity charge apportionment	Remote operation control	●	—	●	—	—	—	—	
	Remote function setting	●	—	●	—	—	—	—	
	Apportionment charge/bill calculation	●	—	●	—	—	—	—	
	Tenant (block) setting	●	—	●	—	—	—	—	
Energy saving management	Common facilities apportionment setting	●	—	●	—	—	—	—	
	Rated power consumption allotment setting	●	—	●	—	—	—	—	
	Individual calculation at cooling and heating	●	—	●	—	—	—	—	
	Electricity meter supported	●	—	●	—	—	—	—	
External Device Control	Indoor unit rotation	●	—	●	—	—	—	—	
	Peak cut control	●	—	●	—	—	—	—	
	Outdoor unit capacity save	●	—	●	—	—	—	—	
	Record of energy saving operation	●	—	●	—	—	—	—	
Others	Energy saving information	●	—	●	—	—	—	—	
	Power consumption monitor	●	—	●	—	—	—	—	
	Electricity meter supported	●	—	●	—	—	—	—	
	Monitor	●	—	●	—	—	—	—	
Control	Control	●	—	●	—	—	—	—	
	Database import/export	●	—	●	—	—	—	—	
	Automatic clock adjustment	●	—	●	—	—	—	—	
	Multi language	7 languages	—	7 languages	—	—	—	—	
Power shutdown	Refrigerant leakage detection function	●	—	●	—	—	—	—	
	Power shutdown	●	—	●	—	—	—	—	

●: Available. - : Not available.

Personal computer system requirements

The required PC specifications are shown in the following table.

	System Controller	System Controller Lite
Operating system	<ul style="list-style-type: none"> Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) [Supported languages] English, Chinese, French, German, Russian, Spanish, and Polish	<ul style="list-style-type: none"> Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) [Supported languages] English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel® Core™ i3 2 GHz or higher	Intel® Core™ i3 2 GHz or higher
Memory	<ul style="list-style-type: none"> 2 GB or more (for Windows® 7 [32-bit]) 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10) 	<ul style="list-style-type: none"> 2 GB or more (for Windows® 7 [32-bit]) 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)
HDD	40 GB or more of free space	40 GB or more of free space
Display	1024 x 768 or higher resolution	1024 x 768 or higher resolution
Interface	<ul style="list-style-type: none"> Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using Public Telephone Line) USB ports (Maximum of 6 ports) (Required only for the Server PC that works as VRF Controller) - Maximum of 2 USB ports are required for WHITE-USB-KEY/WibuKey connection - Maximum of 4 USB ports are required for Echelon® U10 USB Network Interface * Maximum number of required USB port depends on the applicable system configuration 	<ul style="list-style-type: none"> Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using Public Telephone Line) USB ports (Maximum of 6 ports) (Required only for the Server PC that works as VRF Controller) - Maximum of 4 USB ports are required for WHITE-USB-KEY/WibuKey connection - 1 USB port is required for Echelon® U10 USB Network Interface * The maximum number of required USB port depends on the applicable system configuration
Graphic accelerator	Microsoft® DirectX® 9.0c compatible	Microsoft® DirectX® 9.0c compatible
Software	Adobe® Reader® 9.0 or later	Adobe® Reader® 9.0 or later

* Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R) (Required for each VRF Network.)

PACKING LIST

Type	For System controller		For System controller Lite				
	System Controller	Option Energy manager	System Controller Lite	Remote access	Option Electricity charge apportionment	Option Energy saving	Option Central Control
Model name	UTY-APGXZ1	UTY-PEGXZ1	UTY-ALGXZ1	UTY-PLGXR2	UTY-PLGXA2	UTY-PLGXE2	UTY-PLGXX2
WHITE-USB-KEY	1	1	1	1	1	1	1

*1: Software protection key to be inserted in a USB slot running System Controller or System Controller Lite. System Controller or System Controller Lite may only run on a PC with WHITE-USB-KEY. However, WHITE-USB-KEY is not required for remote VRF Explorer software.

BACnet® Gateway

UTY-ABGXZ1 (Software)




WHITE-USB-KEY (Software Protection Key)



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BIL). BIL is a registered trademark of BACnet International.

Max. Controllable
4
VRF network systems
Max. Controllable
400 outdoor units
Max. Controllable
1,600 indoor units

- It is possible to connect medium to large sized BMS to VRF network system via BACnet®, a global standard for open networks.
- A maximum of 1600 indoor units with 4 VRF network systems (a maximum of 400 indoor units & 100 outdoor units for one network system) can be connected to one BACnet® Gateway.
- It is possible to control or monitor VRF network system from BMS via BACnet® Gateway.
- Compatible with BACnet® (ANSI / ASHRAE-135-2014) application specific controller (B-ASC).
- Compatible with BACnet®/IP over Ethernet.
- Scheduling function, Alarm & Event functions as well as Electricity Change Apportionment function are provided in BACnet® Gateway.
- Connection between VRF network system to personal computer is possible via small U10 USB interface. However, both U10 USB interface & personal computer are field supplied items.
- Corresponds to 7 different languages, English, Chinese, French, German, Spanish, Russian, Polish.

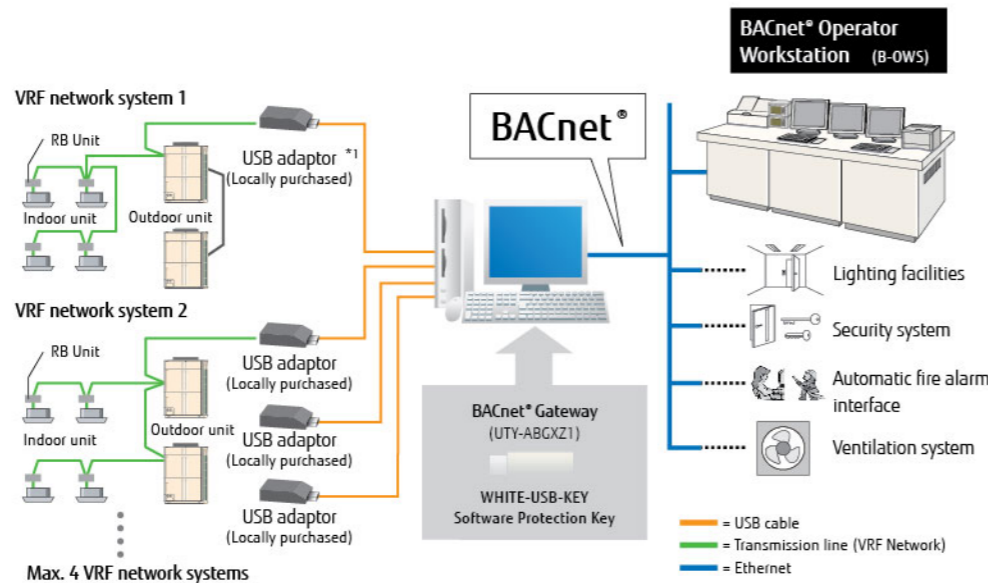

*1: USB adaptor is U10 USB Network Interface of Echelon® Corporation.

Personal computer system requirements

	UTY-ABGXZ1
Operating system	<ul style="list-style-type: none"> • Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 • Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) • Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) [Supported languages] English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel® Core™ i3 2 GHz or higher
Memory	<ul style="list-style-type: none"> • 2 GB or more (for Windows® 7 [32-bit]) • 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)
HDD	40 GB or more of free space
Display	1024 x 768 or higher resolution
Interface	<ul style="list-style-type: none"> • Ethernet port (for getting access to the Internet using LAN) • USB ports (Maximum of 5 ports) <ul style="list-style-type: none"> - 1 USB port is required for WHITE-USB-KEY/WibuKey connection - Maximum of 4 USB ports are required for Echelon® U10 USB Network Interface Maximum* number of required USB ports depends on the applicable system configuration
Software	Adobe® Reader® 9.0 or later

*Echelon® U10 USB Network Interface – TPI/FT-10 Channel (Model number: 75010R) (Required for each VRF Network.)

<Packing list>

Name and shape	Quantity	Application
WHITE-USB-KEY	1	Includes the software and manuals, license for BACnet® Gateway.

BACnet® Gateway

UTY-VBGX (Hardware)



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BIL). BIL is a registered trademark of BACnet International.

Max. Controllable
1 VRF network system

Max. Controllable
32 refrigerant systems


Max. Controllable
128 indoor units

Specifications

Model name	UTY-VBGX
Number of controllable indoor units	128
Number of controllable refrigerant system	32
Number of controllable VRF network	1
Number of connectable units / one VRF network	4


Model name	UTY-VBGX
Power Supply	Single phase, 100-240V, 50/60 Hz
Power Consumption (W)	4.6 (max.)
Dimensions (H × W × D) (mm)	59.6 × 270.4 × 176
Weight (g)	1,200

Installation example

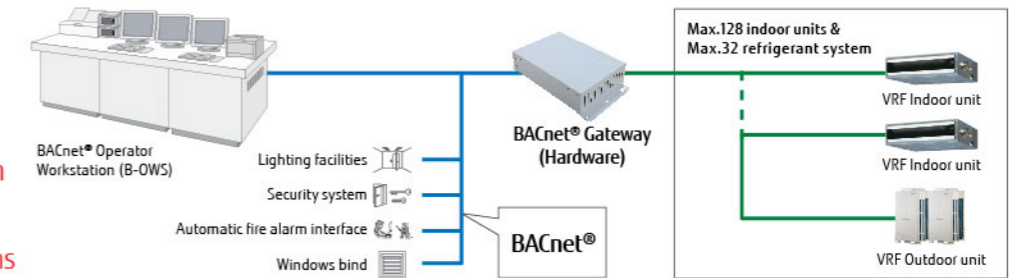


Network Converter for LONWORKS®

UTY-VLGX



- For connection between VRF network system and a LONWORKS® open network for management of small to medium-sized BMS and VRF network system.
- The UTY-VLGX permits central monitoring and control of a VRF network system from a BMS through a LONWORKS® interface.
- Up to 128 Indoor units can be connected to one Network Converter for LONWORKS®

Installation example

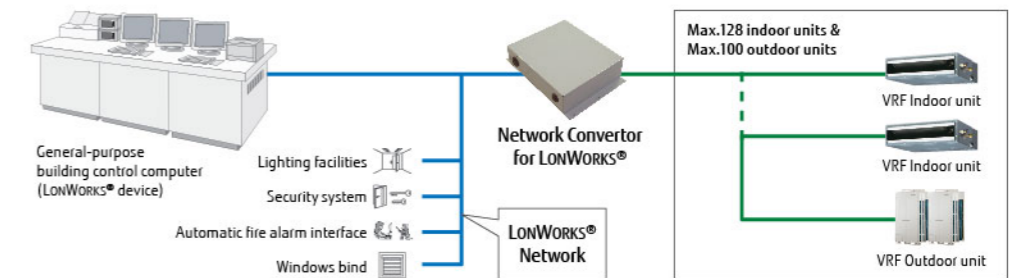

Max. Controllable
4 units to BMS

Max. Controllable
100 outdoor units

Max. Controllable
128 indoor units

Specifications

Model name	UTY-VLGX
Power Supply	208-240 V 50/60 Hz, Single phase
Power Consumption (W)	4.5
Dimensions (H × W × D) (mm)	67 × 288 × 211
Weight (g)	1,500

Transmission specifications (BMS side)

Transmission speed	78 kbps
Transceiver	FT-X1 (Echelon® Corporation)
Transmission way form	Free topology
Terminal resistor	None (It attaches at the terminal of a network.)

MODBUS® Convertor for VRF

UTY-VMGX




The MODBUS Convertor allows a complete integration of air conditioners into MODBUS Networks.

- Compact and lightweight design
- Direct connection to MODBUS Network
- Up to 128 indoor units can be controlled in one MODBUS Convertor
- The MODBUS Convertor permits central monitoring and control of air conditioners from BMS or Central Controller.
- Up to 9 convertors can be connected to a VRF network. The simultaneous controls such as ON/OFF or temperature settings can be done for each zone
- It is easy to locate the source of error if any connection errors should occur after completion of installation works.

Max. Controllable
9 units to one VRF

Max. Controllable
100 outdoor units

Selectable
128 indoor units

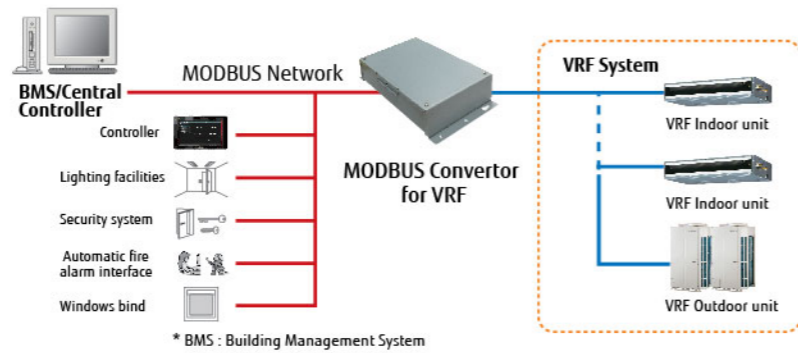

KNX® Convertor for VRF

UTY-VKGX




KNX Convertor is useful for centralized control in a system.

- New KNX Convertor enables to connect central/home controller and Fujitsu General VRF system.
- A maximum of 128 indoor units and 100 outdoor units can be connected to single KNX Convertor.

Max. Controllable
100 outdoor units

Selectable
128 indoor units

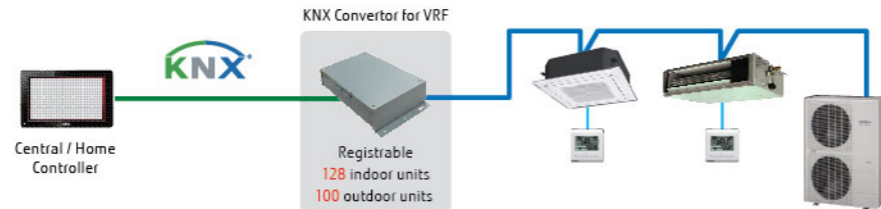

Specifications

Model name	UTY-VMGX
Power Supply	220-240 V 50/60 Hz
Input power (W)	Max. 2
Dimensions (H × W × D) (mm)	54 × 260 × 150
Weight (g)	1,100

Model name	UTY-VKGX
Power supply	220-240 V 50/60 Hz
Power consumption (W)	1.5
Dimensions (H × W × D) (mm)	54 × 260 × 150
Weight (g)	1,200


Signal Amplifier

UTY-VSGXZ1



- Transmission Line length can be extended up to 3,600 m with multiple Signal Amplifiers.
- Up to 8 signal amplifiers can be installed in a VRF network system.
- A signal amplifier is required,
 - (1) When the total wiring length of the transmission line exceeds 500 m.
 - (2) When the total number of units on the transmission line exceeds 64.

Installation example

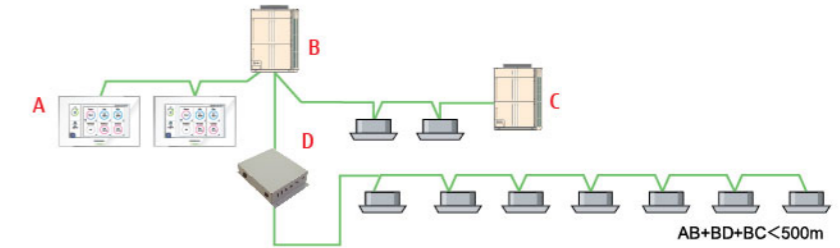

Specifications

Model name	UTY-VSGXZ1
Power Supply	208-240 V 50/60 Hz, Single phase
Power Consumption (W)	4.5
Dimensions (H × W × D) (mm)	67 × 288 × 211
Weight (g)	1,500



Controller System List (available) For VRF

Controller Options:



Type	Refrigerant	Indoor unit																											
		Cassette						Duct						Duct						Floor		Indoor unit		Wall Mounted					
		One-way Flow	3D Flow	Compact Grid type / Standard type	Slim type		Large type		Low Static Pressure Duct			Medium Static Pressure			High Static Pressure			-	EEV external	Ceiling/Floor	Ceiling	-	EEV external	-	EEV external	-	-		
					4-way Flow		Circular Flow		Mini (With drain pump)	Slim (With drain pump)	Slim High Efficiency	Normal	High Efficiency	High Efficiency	Normal	High Efficiency													
R410A	AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXD 18/24GALH	AUXA 18/24/30/ 34/36/45/54 GALH	AUXN 009/012/014 GLAH, AUXM 018/024/030/ 034/036/045/ 054GLEH	AUXK 018/024/030/ 012/014/018/ 024GLEH	ARXX 004/007/009/ 012/014/018/ 024GLEH	ARXD 04GALH	ARXD 007/009/012/ 014/018/024 GLEH	ARXP 009/012/ 014/018 GLAH	ARXA 024/030/ 036/045 GLEH	ARXQ 018/024 GTAH	ARXP 024/030 GTAH	ARXC 45/60GATH	ARXC 036/072/ 090/096 GTEH	ARXQ 030GTAH	AGHA 004/007/ 009/012/014 GCGH	AGHE 004/007/ 009/012/014 GCEH	ABHA 012/014/ 018/024 GTEH	ABHA 030/036/ 045/054 GTEH	ASHA 004/007/009 GCGH	ASHE 004/007/009 GCEH	ASHA 012/014GCGH	ASHE 012/014GCEH	ASHA 18/24GBCH	ASHA 030/034GTEH		
Controllers	Wired Remote Controller	● UTY-RNRGZ3												● UTY-RNRGZ3															
	Wired Remote Controller	● UTY-RLRG												● UTY-RLRG															
	Wired Remote Controller	● UTY-RCRGZ1												● UTY-RCRGZ1															
Interface	Simple Remote Controller	● UTY-RSRG UTY-RHRG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG UTY-RHRG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG UTY-RHRG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG		● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG			
	Wireless Remote Controller	● UTY-LNHG												● UTY-LNHG															
	Central Remote Controller	● UTY-DCGGZ1												● UTY-DCGGZ1															
	System Controller, System Controller Lite	● UTY-APGXZ1, UTY-ALGXZ1												● UTY-APGXZ1, UTY-ALGXZ1															
	BACnet Gateway	● UTY-ABGXZ1, UTY-VBGX												● UTY-ABGXZ1, UTY-VBGX															
	Network Converter for LonWorks	● UTY-VLGX												● UTY-VLGX															
	MODBUS Converter	● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX		● UTY-VMSX			
	MODBUS Converter	● UTY-VMGX												● UTY-VMGX															
	MODBUS Interface	● FJ-RC-MBS-1		● FJ-RC-MBS-1 (GLAH)		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1			
	KNX Converter	● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX		● UTY-VKSX			
KNX Converter	● UTY-VKGX												● UTY-VKGX																
KNX Interface	● FJ-RC-KNX-1i		● FJ-RC-KNX-1i (GLAH)		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i				
Wireless LAN Interface	● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1		● UTY-TFSXZ1				
Wireless LAN Interface	● FJ-RC-WIFI-1		● FJ-RC-WIFI-1 (GLAH)		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1				
External Switch Controller	● UTY-TERX												● UTY-TERX																

Auto Louver Grille Kit

UTD-GXTA-W / UTD-GXTB-W / UTD-GXTC-W




Simple flat Auto Louver will provide comfort airflow and harmonize with luxury interior.




Flexible Control

- Operation with indoor unit**
Auto Louver can be operated by synchronizing remote controller of indoor unit.
- UP and Down auto swing**
 - Auto airflow direction and auto swing
 - 4 steps selectable
- Auto-closing louver**
When operation of indoor unit is stopped, the louver will automatically close.

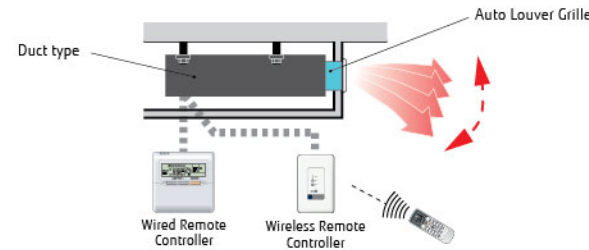

Dimensions

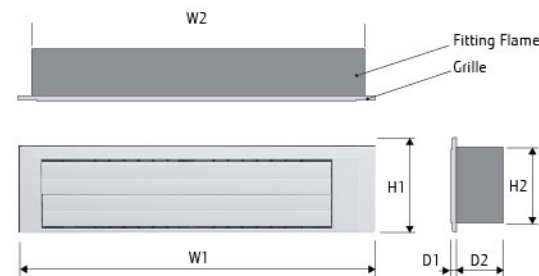

Model Name	W1	W2	H1	H2	D1	D2
UTD-GXTA-W	683	645				
UTD-GXTB-W	883	845	180	148	9	84
UTD-GXTC-W	1,083	1,045				

Unit:mm

Specifications

Model name	UTD-GXTA-W	UTD-GXTB-W	UTD-GXTC-W	
Applicable Indoor Unit	ARHG07/09LLTA ARHG12/14LLTB ARXD007/009/012/014GLEH (For VRF) ARXX004/007/009/012/014GLEH (For VRF) ARXD04GALH (For VRF)	ARHG18LLTB ARXD018GLEH (For VRF) ARXX018GLEH (For VRF)	ARXD024GLEH (For VRF) ARXX024GLEH (For VRF)	
Power Supply	Connecting with Control box of indoor unit			
Fixing of Auto Louver Grille	Screw fixing to Flange or Square Duct			
Extension Square Duct Limit	1.0m (Max. duct length between indoor unit and Grille)			
Net Dimension (H × W × D)	mm	180×683×(84+9)	180×883×(84+9)	180×1083×(84+9)
Weight	Net	2.0 (4.4)	2.5 (5.6)	3.0 (6.7)
	Gross	3.0 (6.7)	3.5 (7.8)	4.0 (8.9)
Color	White			
Louver Motor	Stepping Motor			
Accessories	Fitting Flame, etc.			
Operation range	Cooling	°C	18 to 32	
		% RH	80% or less	
	Heating	°C	16 to 30	

External Power Supply Unit

UTZ-GXXA




External Power Supply Unit can protect the units in the system even if some powers of indoor units are shut down in the system.

Power is supplied to the indoor unit from auxiliary power by connecting to External Power Supply Unit. This makes it possible to operate continuously without system error.

High Reliability

- A: Main power shut down can be detected at power shut down detection part.
- B: The power for indoor unit expansion valve drive, etc. is supplied. (DC 12V, 5V)
- C: Power supply from External Power Supply Unit is notified.

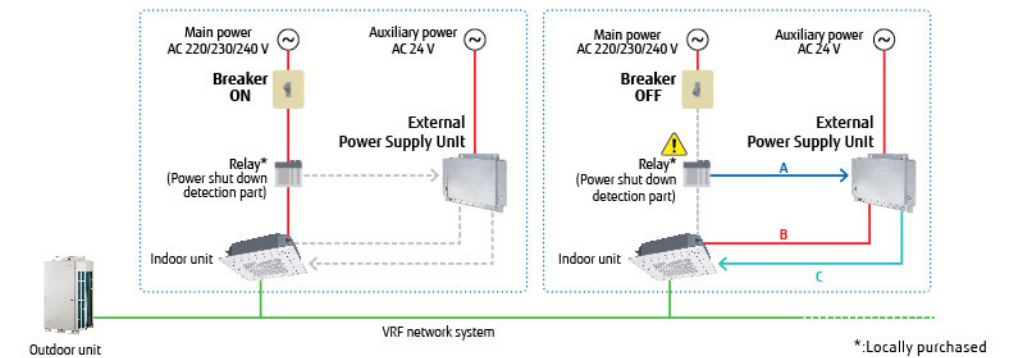

- Note**
- When changing the power supply voltage to AC24V, use a power transformer with an insulation structure equivalent to CLASS 2.
 - Indoor units that are powered off and driven by an External Power Supply Unit are handled in the same manner as operation off units in the electricity charge apportionment function. Since standby power may be charged to them, the electricity charge apportionment result for them may not be 0.

Specifications


Model name	UTZ-GXXA
Power Supply	AC 24 V 50/60 Hz, single phase
Dimensions (H × W × D) (mm)	65 × 186 × 178
Weight (g)	500

AIR BEAM Radiation Air Outlet Unit


*Production by order
Please get in touch with us for more details.





Key component

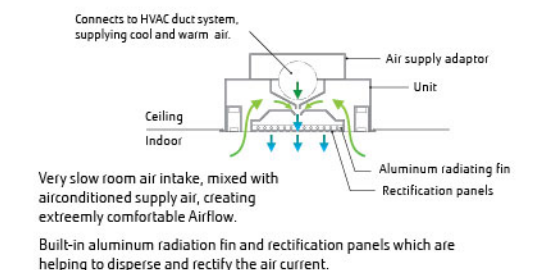


Cross-section view



Airflow rate (m³/h)	180 (160-215)	270 (240-325)
Grid	600 x 2	600 x 3
AIR BEAM For system ceiling (Integrated type)	 K5-180	 K5-270

Separation Tube etc.



Separation Tube

UTP-AX054A	UTP-AX090A	UTP-AX180A	UTP-AX567A
<p>Gas Pipe</p> <p>Liquid Pipe</p>	<p>Gas Pipe</p> <p>Liquid Pipe</p>	<p>Gas Pipe</p> <p>Liquid Pipe</p>	<p>Gas Pipe</p> <p>Liquid Pipe</p>

Outdoor Unit Branch Kit

UTP-CX567A		
<p>Gas Pipe</p> <p>Liquid Pipe</p>		

EV Kit

Model code ≤ 09 : UTR-EV09XB
 Model code ≥ 12 : UTR-EV14XB
 For Compact Wall Mounted type



Separation Tube

Model name	UTP-AX054A	UTP-AX090A	UTP-AX180A	UTP-AX567A
Total cooling capacity of indoor unit (kW)	19.6 or less	28.0 or less	28.1 to 56.0	56.1 or more

Outdoor unit Branch kit

Model name	UTP-CX567A (V-III Tropical)	
Number of outdoor unit	2 outdoor units	1
	3 outdoor units	2

EV Kit

Model name	UTR-EV09XB		UTR-EV14XB	
Application model	ASHE004GCEH ASHE007GCEH ASHE009GCEH	AGHE004GCEH AGHE007GCEH AGHE009GCEH	ASHE012GCEH ASHE014GCEH	AGHE012GCEH AGHE014GCEH